



Tokio Mini Lens

144 LED/m • 44 LED/ft
10,0 W/m • 3,1 W/ft
168 LED/m • 52 LED/ft
15,0 W/m • 4,6 W/ft
182 LED/m • 56 LED/ft
20,0 W/m • 6,1 W/ft

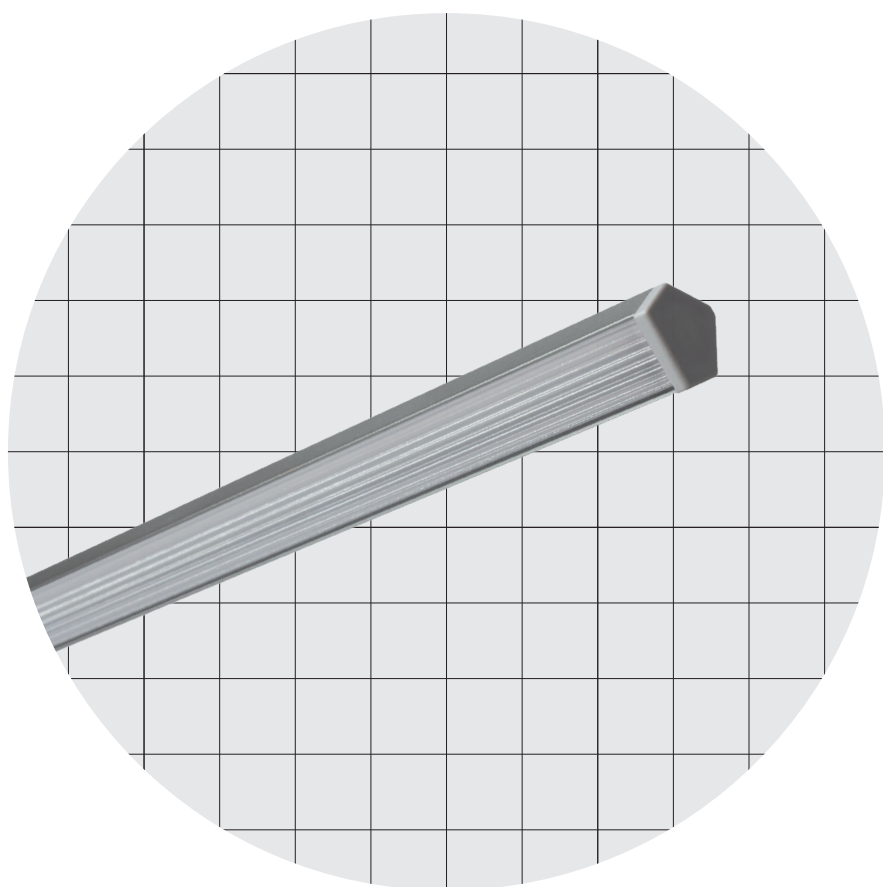

13,0 × 13,0 mm
0,51 × 0,51"

Tokio Mini Lens



L30 Angled



L70 Angled

Body Corpo

Angled linear profile

Profilo lineare angolare

Fastening Fissaggio	Caps + Magnets Caps + Silicone Heads with screws	Tappi + Magneti Tappi + Silicone Testatine con viti
Linear optics Ottiche lineari	L30 - 30° L70 - 70°	L30 - 30° L70 - 70°
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Caps + Magnets: Up to 3000 mm • 118,10 " Caps + Silicone: Up to 3000 mm • 118,10 " Heads with screws: Up to 1500 mm • 59,06 "	Tappi + Magneti: Fino a 3000 mm Tappi + Silicone: Fino a 3000 mm Testatine con viti: Fino a 1500 mm

Finishing

Finitura

● Grey anodized

● Anodica grigia

Listings and marks

Certificazioni e marchi

LED

LED




Light Luce

Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft
CCT K Mixing on demand Miscelazione su richiesta	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Luminous flux (Strip LED) Flusso luminoso (Strip LED) ● 3000 K	1300 lm/m • 396 lm/ft	2115 lm/m • 645 lm/ft	3280 lm/m • 1000 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC


Tokio Mini Lens

Dimensions Dimensioni Scale/Scala 1:1


TAM Caps + Magnets
Tappi + Magneti

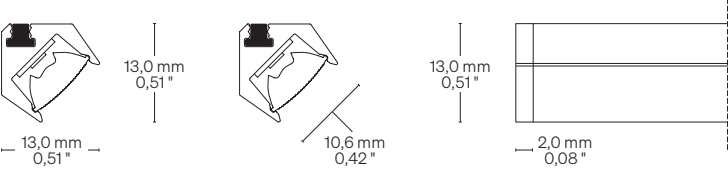

TAS Caps + Silicone
Tappi + Silicone

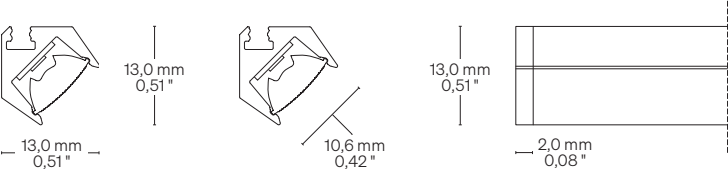


TE Heads with screws
Testatine con viti

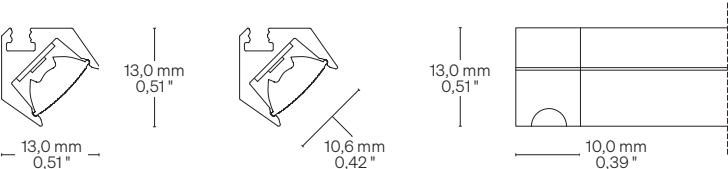


Fastening options Opzioni di fissaggio


TAM Caps + Magnets
Tappi + Magneti

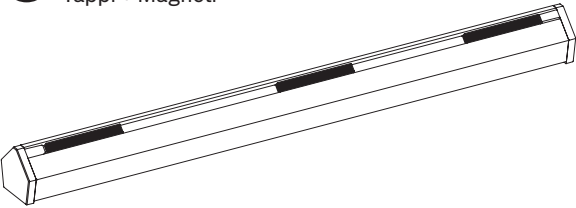

TAS Caps + Silicone
Tappi + Silicone

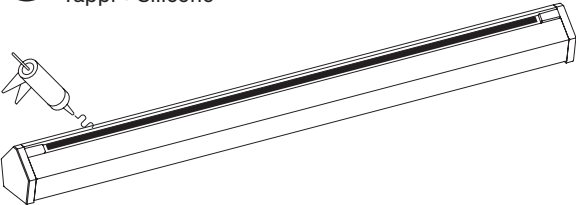

TE Heads with screws (Hole size: 2,8 mm • 0,11")
Testatine con viti (Diametro foro: 2,8 mm)

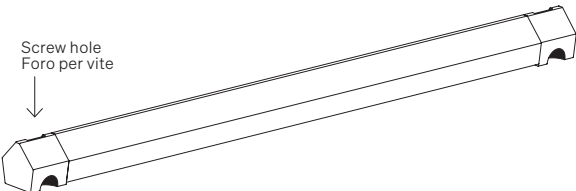

Order code Codice ordine

Basic codes
Codici base

- TKSF144** Tokio Mini Lens
144 LED/m • 44 LED/ft
10,0 W/m • 3,1 W/ft
- TKSF168** Tokio Mini Lens
168 LED/m • 52 LED/ft
15,0 W/m • 4,6 W/ft
- TKSF182** Tokio Mini Lens
182 LED/m • 56 LED/ft
20,0 W/m • 6,1 W/ft

CCT K
CCT K

- WW27** 2700 K
- WW30** 3000 K
- NW35** 3500 K
- NW** 4000 K
- CW** 5000 K

Fastening options
Opzioni di fissaggio

- TAM** Caps + Magnets
Tappi + Magneti
- TAS** Caps + Silicone
Tappi + Silicone
- TE** Heads with screws
Testatine con viti

Linear optics
Ottiche lineari

- L30** 30°
- L70** 70°

Custom size
Lunghezza ordinabile


- Specify the size
Specificare la misura

Order example
Esempio ordine


- TKSF144 WW27 TAM L30 • 0,32**
Tokio Mini Lens, 144 LED/m • 44 LED/ft,
10,0 W/m • 3,1 W/ft, Warm White 2700,
Caps + Magnets, Linear optic 30° • 0,32 m
- Tokio Mini Lens, 144 LED/m, 10,0 W/m,
Warm White 2700, Tappi + Magneti,
Ottica lineare 30° • 0,32 m

Cable outlet Uscita cavi

Left side Lato sinistro

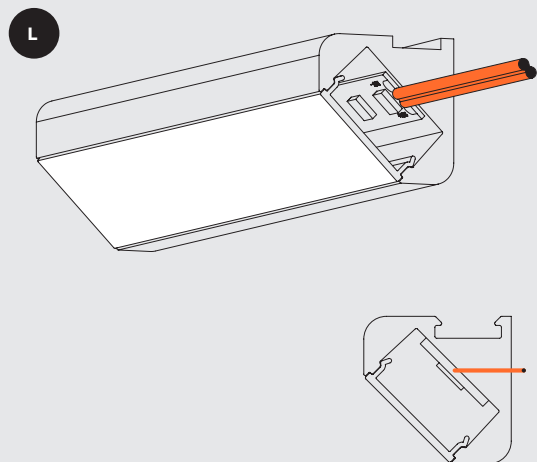

Right side Lato destro

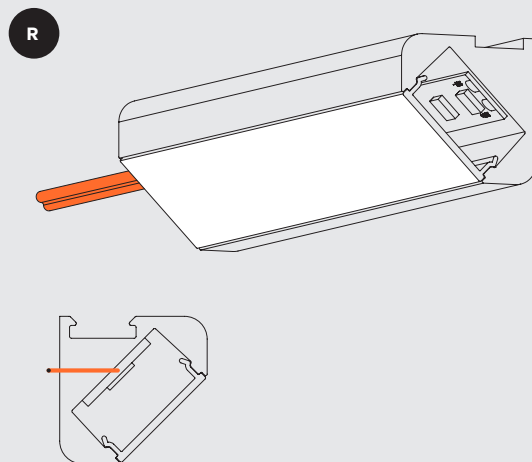

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.