


133 P5/P7

P5 → 18 LED/m • 5 LED/ft

19,8 W/m • 6,0 W/ft

P7 → 14 LED/m • 4 LED/ft

15,4 W/m • 4,7 W/ft



18,3 × 19,0 mm
0,72 × 0,75 "



133 P5/P7



Sharp

Body Corpo

Symmetrical linear profile Profilo lineare simmetrico


Fastening Fissaggio	Caps + Steel clips Caps + Magnets Heads with screws	Tappi + Clip in acciaio Tappi + Magneti Testatine con viti
Screen Schermo	Transparent 5 (Screening 5%) Opal 20 (Screening 20%) Opal 50 (Screening 50%)	Trasparente 5 (Schermatura 5%) Opale 20 (Scherm. 20%) Opale 50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia

Listings and marks Certificazioni e marchi



UL Mark → Only for P5 (55,5 mm • 2,19 ")
UL Mark → Solo per P5 (55,5 mm)

Where we produce Dove produciamo



LED
LED




Light Luce

Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K Mixing on demand Miscelazione su richiesta	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf Rg MacAdam ellipse	Min 90 Min 80 95 102 2	Min 90 Min 80 95 102 2
Luminous flux Flusso luminoso ● 3000 K	↓ O2 - 70 lm/W 1393 lm/m • 425 lm/ft	↓ O2 - 70 lm/W 1071 lm/m • 327 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC


133 P5/P7

Dimensions Dimensioni Scale/Scala 1:2


TA Caps + Steel clips
Tappi + Clip in acciaio

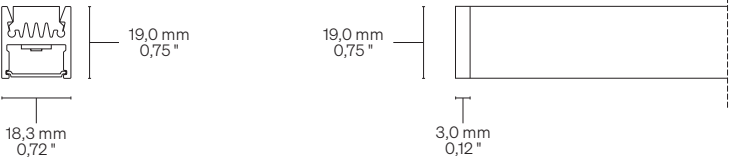

TAM Caps + Magnets
Tappi + Magneti

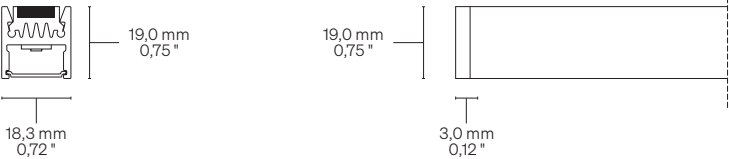


TE Heads with screws
Testatine con viti

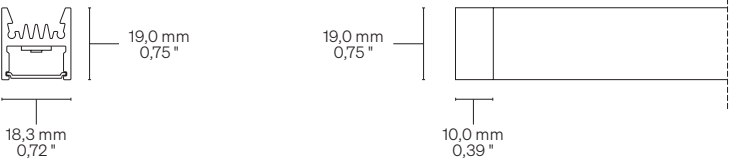


Fastening options Opzioni di fissaggio


TA Caps + Steel clips
Tappi + Clip in acciaio

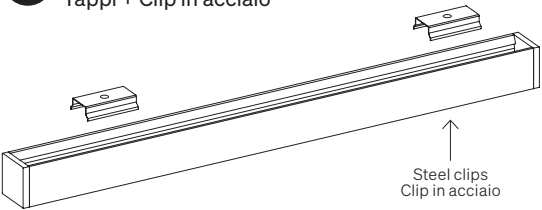

TAM Caps + Magnets
Tappi + Magneti

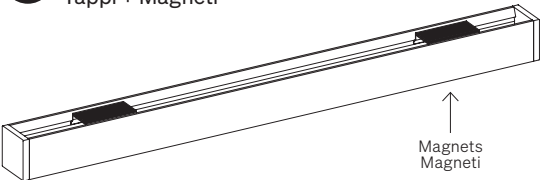

TE Heads with screws
Testatine con viti

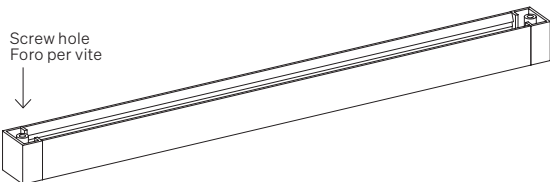

Order code Codice ordine

Basic codes Codici base	133P5	133 P5 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft
	133P7	133 P7 14 LED/m • 4 LED/ft 15,4 W/m • 4,70 W/ft
CCT K CCT K	27	2700 K
	30	3000 K
	35	3500 K
	40	4000 K
	50	5000 K
Fastening options Opzioni di fissaggio	TA	Caps + Steel clips Tappi + Clip in acciaio
	TAM	Caps + Magnets Tappi + Magneti
	TE	Heads with screws Testatine con viti
Screens Schermi	T5	Transparent/Trasparente 5
	O2	Opal/Opale 20
	O5	Opal/Opale 50
Finishing Finitura	O1	Grey anodized Anodica grigia
	--	Specify the size Specificare la misura

Order example Esempio ordine



133P5 27 TA T5 O1 • 0,32

133 P5, 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft, Warm White 2700,
Caps + Steel clips, Transparent 5,
Grey anodized • 0,32 m

133 P5, 18 LED/m, 19,8 W/m,
Warm White 2700, Tappi + Clip in acciaio,
Trasparente 5, Anodica grigia • 0,32 m

133 P5/P7

Cable outlet Uscita cavi

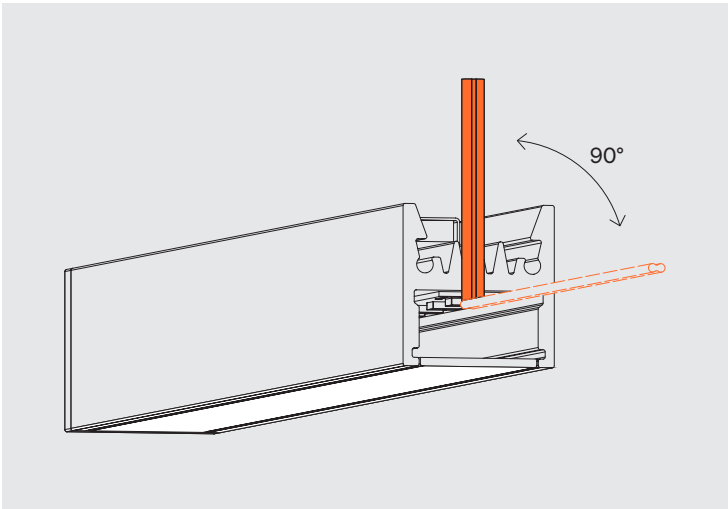

Scale/Scala 1:1

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.