

133 Mini Lens



L30

L70

Body Corpo

Symmetrical linear profile

Profilo lineare simmetrico

Fastening Fissaggio	Caps + Plastic clips Caps + Magnets Heads with screws	Tappi + Clip in plastica Tappi + Magneti Testatine con viti
-------------------------------	---	---

Linear optics Optica lineare	L30 - 30° L70 - 70°	L30 - 30° L70 - 70°
--	------------------------	------------------------

Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
---	-------------------	---------

Custom size Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
--	--------------------------	----------------

Finishing Finitura	● Grey anodized	● Anodica grigia
------------------------------	-----------------	------------------

Listings and marks

Certificazioni e marchi



LED

LED



Light Luce

Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft
--	-----------------------	-----------------------

Power consumption Consumo energia	10,0 W/m • 3,0 W/ft	15,0 W/m • 4,8 W/ft
---	---------------------	---------------------

CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		

CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
---	------------------------------------	------------------------------------


Luminous flux (Strip LED) Flusso luminoso (Strip LED) ● 3000 K	1300 lm/m • 396 lm/ft	2115 lm/m • 645 lm/ft
---	-----------------------	-----------------------

Input voltage Tensione di ingresso	24 V DC	24 V DC
--	---------	---------


Dimensions Dimensioni

Scale/Scala 1:1


TA Caps + Plastic clips Tappi + Clip in plastica

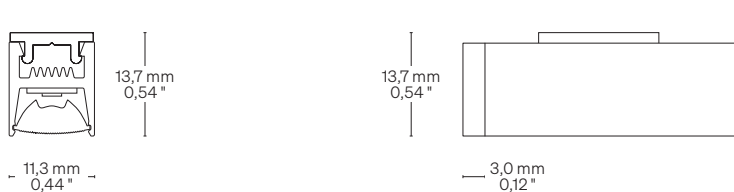

TAM Caps + Magnets Tappi + Magneti

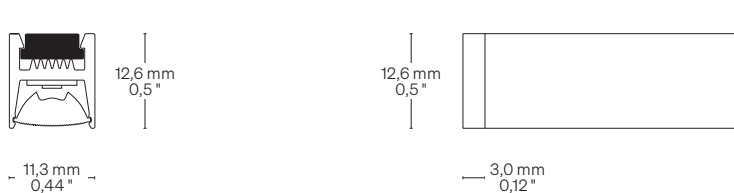


TE Heads with screws Testatine con viti

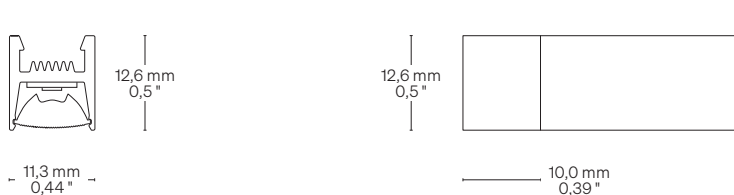


Fastening options Opzioni di fissaggio


TA Caps + Plastic clips Tappi + Clip in plastica

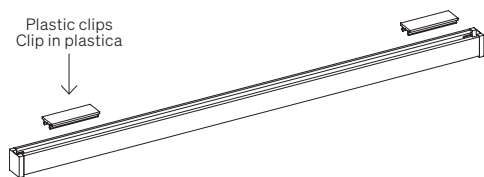

TAM Caps + Magnets Tappi + Magneti

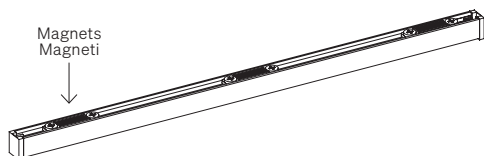

TE Heads with screws Testatine con viti

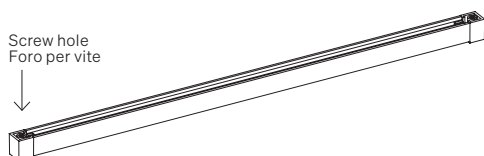

Order code Codice ordine

Basic code
Codice base

- **133SF144** 133 Mini
144 LED/m • 44 LED/ft
10,0 W/m • 3,0 W/ft
- **133SF168** 133 Mini
168 LED/m • 52 LED/ft
15,0 W/m • 4,8 W/ft

CCT K
CCT K

- **WW27** 2700 K
- **WW30** 3000 K
- **NW35** 3500 K
- **NW** 4000 K
- **CW** 5000 K

Fastening options
Opzioni di fissaggio

- **TA** Caps + Plastic clips
Tappi + Clip in plastica
- **TAM** Caps + Magnets
Tappi + Magneti
- **TE** Heads with screws
Testatine con viti

Linear optics
Optica lineare

- **L30** 30°
- **L70** 70°

Custom size
Lunghezza ordinabile

- -- Specify the size
Specificare la misura

Order example
Esempio ordine

- **133SF144 WW27 TA L30 • 0,32**
133 Mini, 144 LED/m • 44 LED/ft
10,0 W/m • 3,0 W/ft,
Warm White 2700, Caps + Plastic clips,
Linear optic 30° • 0,32 m
- 133 Mini, 144 LED/m, 10,0 W/m,
Warm White 2700, Tappi + Clip in plastica,
Optica lineare 30° • 0,32 m