


# Area 144

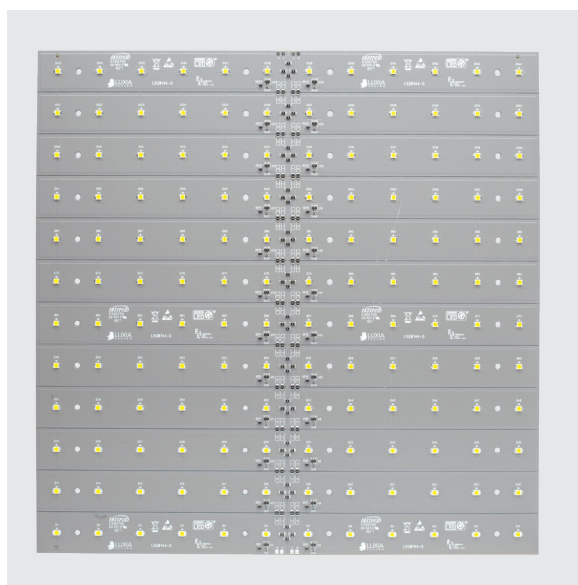

## Body Corpo

### Self-dissipating LED circuit

Circuito LED autodissipante

### Wiring set

Cavo alimentazione

2000 mm • 78,74 "

2000 mm

### Listings and marks

Certificazioni e marchi



### LED

LED



## Light Luce

### Light source

Sorgente luminosa

144 LED

### Power consumption

Consumo energia

21,1 W

### CCT K

Mixing on demand  
Miscelazione su richiesta

● 2700 K  
● 3000 K  
● 3500 K  
● 4000 K  
● 5000 K  
● 5700 K

### CRI

R9

Rf @ 3000 K

Rg @ 3000 K

MacAdam ellipse

Min 90

Min 50

92

100

3

### Luminous flux

Flusso luminoso

● 3000 K

2449 lm


### Input voltage

Tensione di ingresso

24 V DC


**Dimensions** Dimensioni

Scale/Scala 1:4

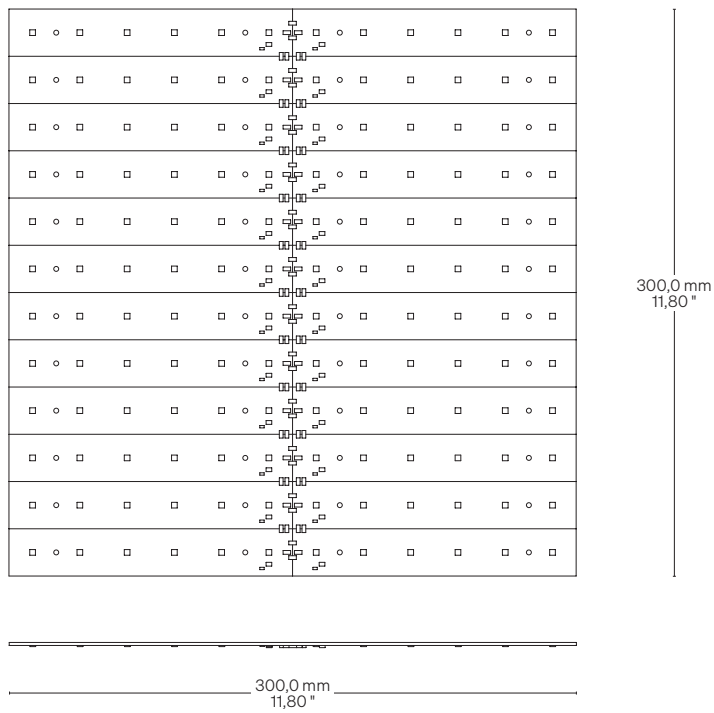

**Fastening options** Opzioni di fissaggio

Hole size for fixing:  $\varnothing 3,0 \text{ mm} \bullet \varnothing 0,12 \text{ \"}$   
 Diametro foro per fissaggio:  $\varnothing 3,0 \text{ mm}$

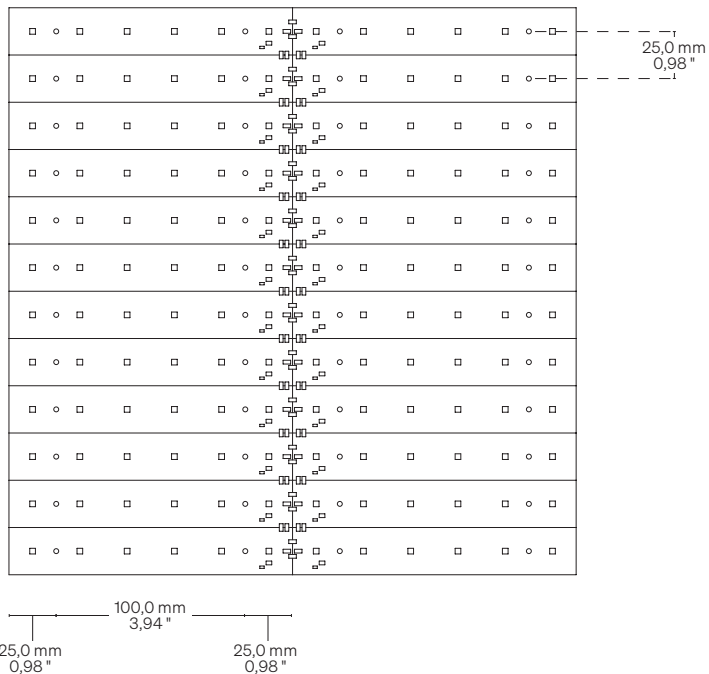

**Order code** Codice ordine

|                                  |  |  |
|----------------------------------|--|--|
| <b>Basic code</b><br>Codice base | • <b>A144</b>  | Area 144   |
| <b>CCT K</b><br>CCT K            | • <b>WW27</b><br><b>WW30</b><br><b>NW35</b><br><b>NW</b><br><b>CW</b><br><b>CW57</b> | <ul style="list-style-type: none"> <li>● 2700 K</li> <li>● 3000 K</li> <li>● 3500 K</li> <li>● 4000 K</li> <li>● 5000 K</li> <li>● 5700 K</li> </ul> |

|  |                    |  |
|--|--------------------|--|
| <b>Order example</b><br>Esempio ordine | • <b>A144 WW27</b> | Area 144, Warm White 2700<br><br>Area 144, Warm White 2700 |
|--|--------------------|--|