

Kobe Lens

144 LED/m • 44 LED/ft

10,0 W/m • 3,1 W/ft

168 LED/m • 52 LED/ft



15,0 W/m • 4,6 W/ft

182 LED/m • 56 LED/ft

20,0 W/m • 6,1 W/ft

TW - 252 LED/m • 77 LED/ft Tunable White

20,0 W/m • 6,1 W/ft

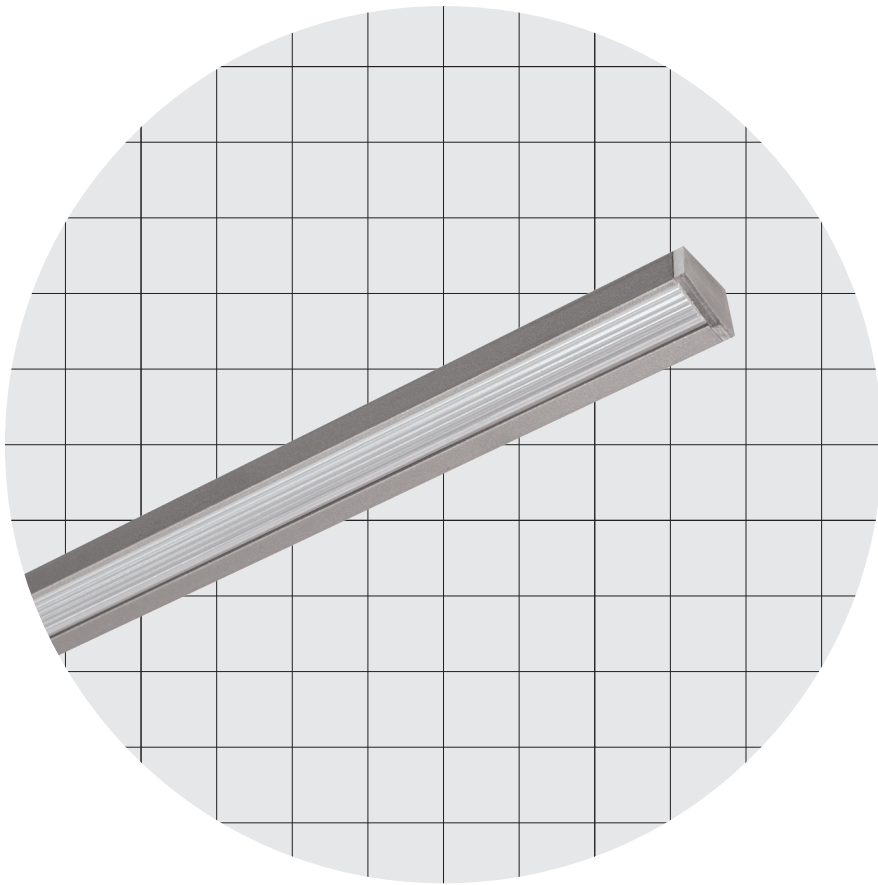

16,0 mm × 10,2 mm

0,62" × 0,40"

Kobe Lens



L30 Asymmetric

L70 Asymmetric

Body Corpo

Linear asymmetric profile

Profilo lineare asimmetrico

Fastening Fissaggio	Caps + Magnets	Tappi + Magneti
-------------------------------	----------------	-----------------

Linear optics Ottica lineare	L30 - 30° L70 - 70°	L30 - 30° L70 - 70°
--	------------------------	------------------------

Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
---	-------------------	---------

Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
--	--------------------------	----------------

Finishing Finitura	● Grey anodized	● Anodica grigia
------------------------------	-----------------	------------------

Listings and marks

Certificazioni e marchi

LED

LED



Light Luce


Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2200 - 5700 K
Mixing on demand Miscelazione su richiesta				
CRI	Min 90	Min 90	Min 90	Min 90
R9	Min 50	Min 50	Min 50	Min 50
Rf @ 3000 K	92	92	92	92
Rg @ 3000 K	100	100	100	100
MacAdam ellipse	3	3	3	3
Luminous flux (Strip LED) Flusso luminoso (Strip LED) ● 3000 K	1300 lm/m • 396 lm/ft	2115 lm/m • 645 lm/ft	3280 lm/m • 1000 lm/ft	1800 lm/m • 549 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC

Kobe Lens

Dimensions Dimensioni

Scale/Scala 1:1

TAM Caps + Magnets
Tappi + Magneti





10,2 mm
0,40"

10,2 mm
0,40"


16,0 mm
0,62"

2,0 mm
0,08"



Fastening options Opzioni di fissaggio

TAM Caps + Magnets
Tappi + Magneti

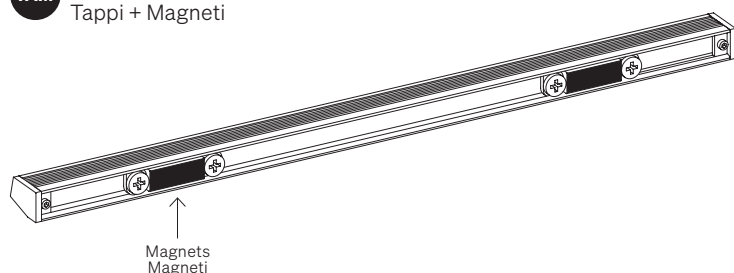

Order code Codice ordine

Basic code
Codice base

- **KOF144** Kobe Lens
144 LED/m • 44 LED/ft
10,0 W/m • 3,1 W/ft
- **KOF168** Kobe Lens
168 LED/m • 52 LED/ft
15,0 W/m • 4,6 W/ft
- **KOF182** Kobe Lens
182 LED/m • 56 LED/ft
20,0 W/m • 6,1 W/ft
- **KOF252** Kobe Lens
TW 252 LED/m • 77 LED/ft
● 2200 - 5700 K
20,0 W/m • 6,1 W/ft

CCT K
CCT K

- **WW27** ● 2700 K
- **WW30** ● 3000 K
- **NW35** ● 3500 K
- **NW** ● 4000 K
- **CW** ● 5000 K

Fastening options
Opzioni di fissaggio

- **TAM** Caps + Magnets
Tappi + Magneti

Linear optics
Ottica lineare

- **L30** 30°
- **L70** 70°

Custom size
Lunghezza ordinabile

- **--** Specify the size
Specificare la misura

Order example
Esempio ordine

- **KOF144 WW27 TAM L30 • 0,32**



Kobe Lens, 144 LED/m • 44 LED/ft,
10,0 W/m • 3,1 W/ft, Warm White 2700,
Caps + Magnets, Linear optic 30° • 0,32 m

Kobe Lens, 144 LED/m, 10,0 W/m,
Warm White 2700, Tappi + Magneti,
Ottica lineare 30° • 0,32 m

Cable outlet Uscita cavi



Left side Lato sinistro

L

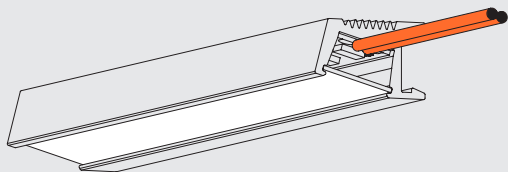

Right side Lato destro

R

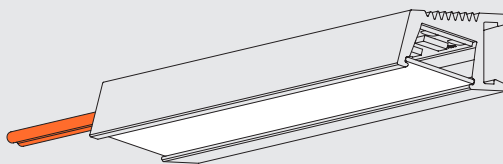

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.