

Arena



Body Corpo

Adjustable aluminum spot

Spot in alluminio orientabile

Fastening Fissaggio	With ferrule	Con ghiera
Optics Ottica	20° • 25° • 38° • 45° • 62°	20° • 25° • 38° • 45° • 62°
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Finishing Finitura	● Black anodized	● Anodica nera

Listings and marks

Certificazioni e marchi



LED

LED




Light Luce


Light source Sorgente luminosa	↓ Series/In serie 1,0 W @ 350mA 1,5 W @ 500mA	↓ Parallel/In parallelo 1,1 W @ 24 V DC 1,6 W @ 24 V DC
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
Luminous flux Flusso luminoso ● 3000 K	101 lm @ 350mA 139 lm @ 500mA	101 lm 139 lm
Input voltage/current Tensione/Corrente di ingresso	3 V @ 350mA / @ 500mA	24 V DC
Only external driver Driver solo esterno	-	DC/CC

Dimensions Dimensioni

Scale/Scala 1:2

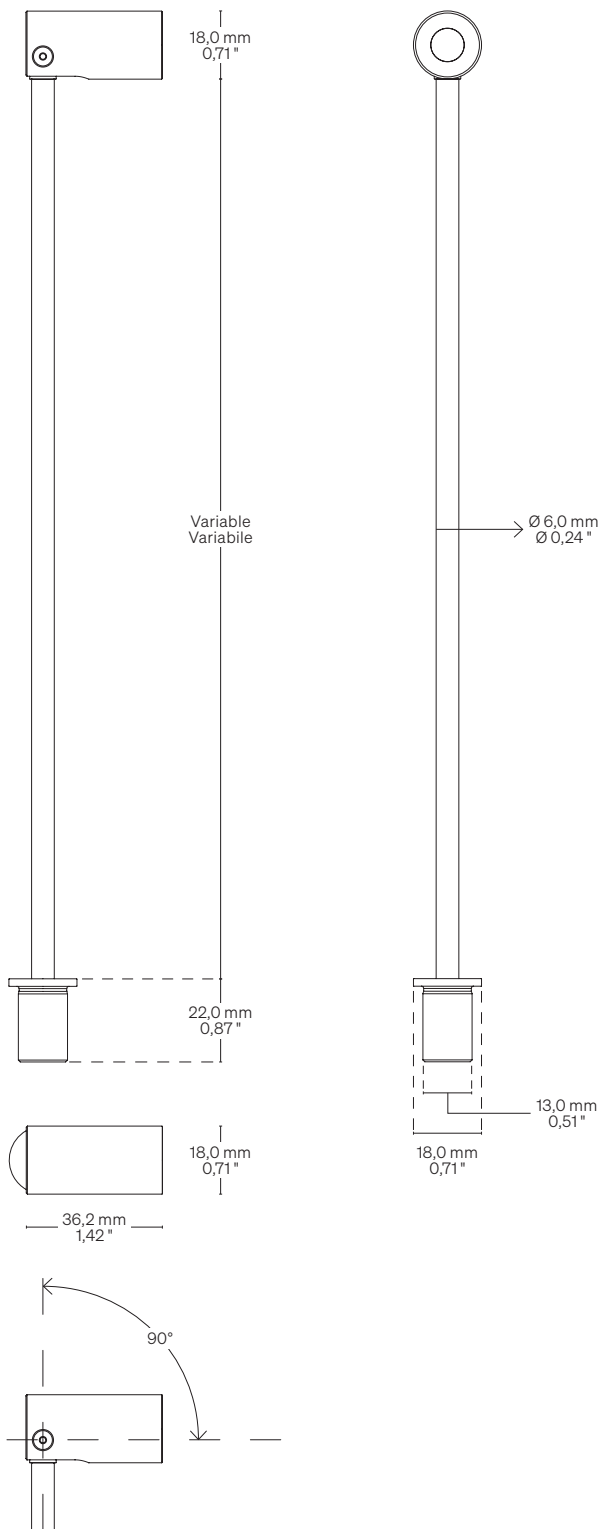

Fastening options Opzioni di fissaggio

 Hole size: $\varnothing 13,5 \text{ mm} \bullet \varnothing 0,53 \text{ ''}$
Dimensione foro: $\varnothing 13,5 \text{ mm}$

Maximum thickness: $15,0 \text{ mm} \bullet 0,59 \text{ ''}$
Spessore massimo: $15,0 \text{ mm}$

Order code Codice ordine

Basic code Codice base	• AR	Arena
CCT K CCT K	• WW27 WW30 NW35 NW CW	• 2700 K • 3000 K • 3500 K • 4000 K • 5000 K
Optics Ottica	• 20 25 38 45 62	• 20° • 25° • 38° • 45° • 62°
Accessories Accessori	• DRPWM DRDC	• Converter 24 V DC/ Convertitore 24 V DC • Converter 24 V DC Potential different dimmer/ Convertitore 24 V DC Dimmerabile in tensione

Order example
Esempio ordine

• **AR WW27 20 DRPWM**
Arena, Warm White 2700, 20° optics,
Converter 12 V DC - PWM Dimmer

Arena, Warm White 2700, Ottica 20°,
Convertitore 12 V DC - Dimmerabile PWM