


133 P5/P7

P5 → 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft
P7 → 14 LED/m • 4 LED/ft
15,4 W/m • 4,7 W/ft



18,3 × 19,0 mm
0,72 × 0,75 "



133 P5/P7



Sharp

Body Corpo

Symmetrical linear profile

Profilo lineare simmetrico

Fastening Fissaggio	Caps + Steel clips Caps + Magnets Heads with screws	Tappi + Clip in acciaio Tappi + Magneti Testatine con viti
Screen Schermo	Transparent TR5 (Screening 5%) Opal OP20 (Screening 20%) Opal OP50 (Screening 50%)	Trasparente TR5 (Schermatura 5%) Opale OP20 (Scherm. 20%) Opale OP50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia

Listings and marks

Certificazioni e marchi



UL Mark → Only for P5 (55,5 mm • 2,19 ")

UL Mark → Solo per P5 (55,5 mm)

Where we produce

Dove produciamo

Made in Italy

LED
LED



Light Luce


Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K Mixing on demand Miscelazione su richiesta	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf Rg MacAdam ellipse	Min 90 Min 80 95 102 2	Min 90 Min 80 95 102 2
Luminous flux Flusso luminoso ● 3000 K	↓ OP20 – 70 lm/W 1393 lm/m • 425 lm/ft	↓ OP20 – 70 lm/W 1071 lm/m • 327 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC

133 P5/P7


Dimensions Dimensioni

Scale/Scala 1:2


TA Caps + Steel clips
Tappi + Clip in acciaio

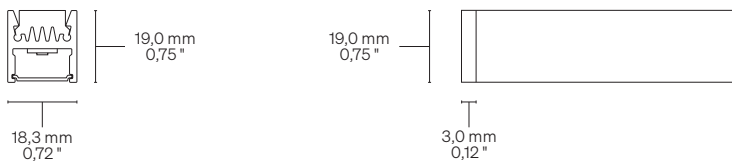

TAM Caps + Magnets
Tappi + Magneti

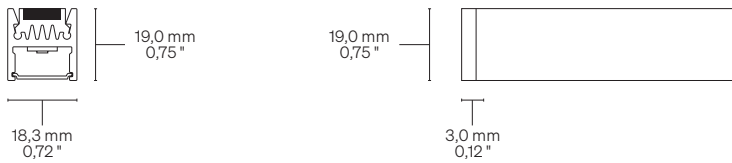


TE Heads with screws
Testatine con viti

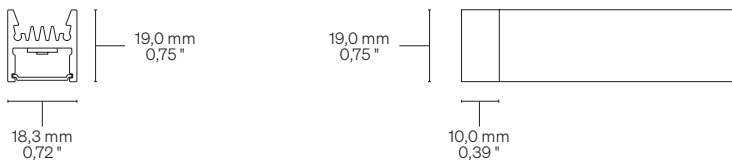


Fastening options Opzioni di fissaggio


TA Caps + Steel clips
Tappi + Clip in acciaio

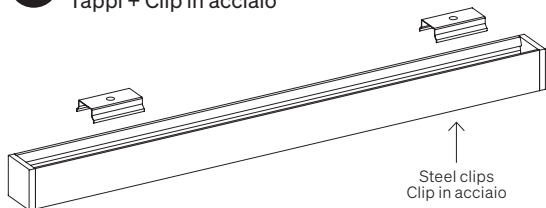

TAM Caps + Magnets
Tappi + Magneti

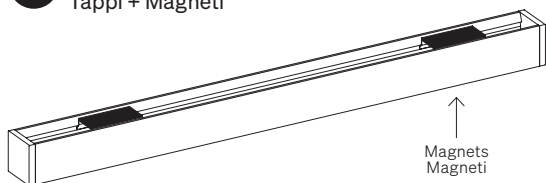

TE Heads with screws
Testatine con viti

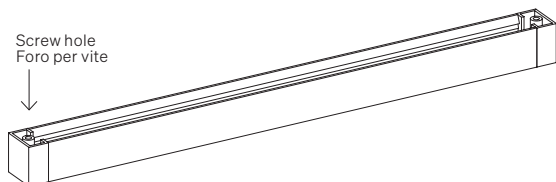**Order code** Codice ordine

Basic codes

Codici base

- | | |
|---------------|---|
| • 1335 | 133 P5
18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft |
| 1337 | 133 P7
14 LED/m • 4 LED/ft
15,4 W/m • 4,70 W/ft |

CCT K
CCT K

- **WW27** 2700 K
- WW30** 3000 K
- NW35** 3500 K
- NW** 4000 K
- CW** 5000 K

Fastening options

Opzioni di fissaggio

- | | |
|------------|-------------------------|
| TA | Caps + Steel clips |
| TAM | Tappi + Clip in acciaio |
| | Caps + Magnets |
| | Tappi + Magneti |
| TE | Heads with screws |
| | Testatine con viti |

Screens

- | | |
|-------------|---------------------------|
| TR5 | Transparent/Trasparente 5 |
| OP20 | Opal/Opale 20 |
| OP50 | Opal/Opale 50 |

Custom size
Lunghezza ordinabile




- -- Specify the size
Specificare la misura

Order example
Esempio ordine

- **1335 WW27 TA TR5 • 0,32**
- 133 P5, 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft, Warm White 2700,
Caps + Steel clips, Transparent 5 • 0,32 m
- 133 P5, 18 LED/m, 19,8 W/m,
Warm White 2700, Tappi + Clip in acciaio,
Trasparente 5 • 0,32 m

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

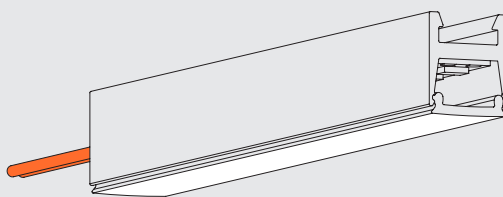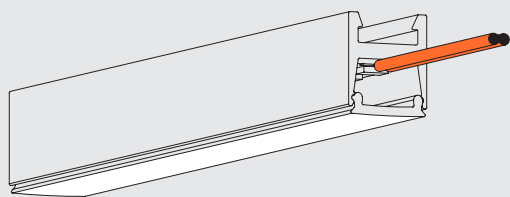

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.