

Aiko 8

182 LED/m • 55 LED/ft


5,0 W/m • 1,5 W/ft

182 LED/m • 55 LED/ft

9,5 W/m • 2,9 W/ft

182 LED/m • 55 LED/ft

15,7 W/m • 4,8 W/ft

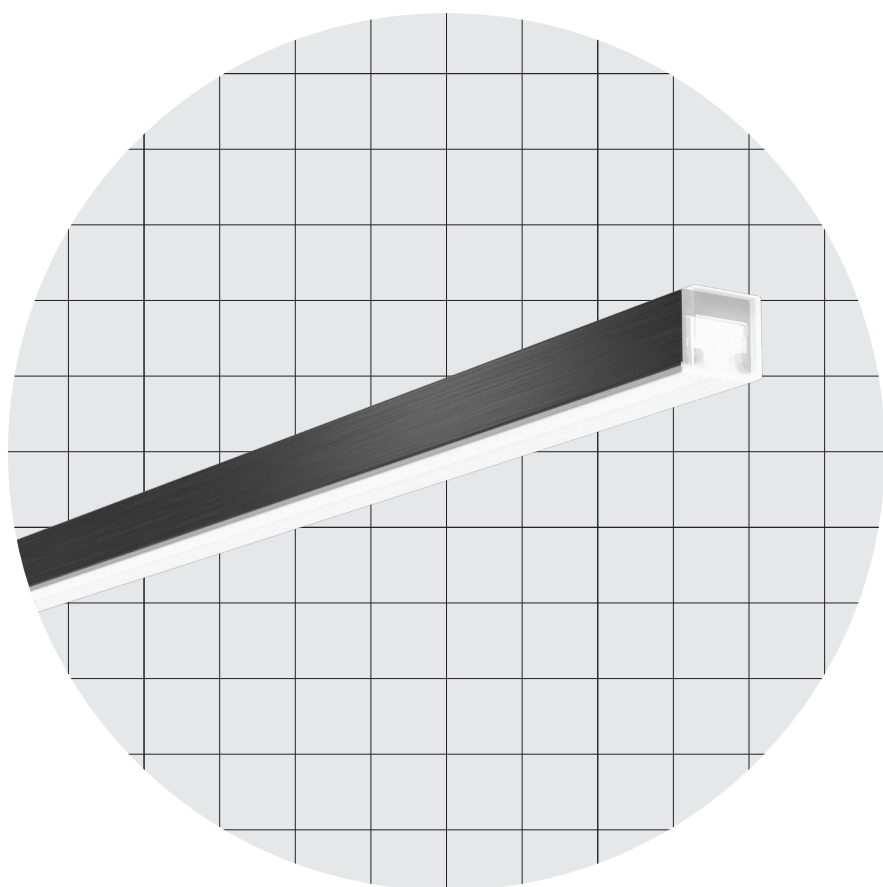

8,0 × 8,0 mm
0,31 × 0,31"

Aiko 8



Sharp

Body Corpo		
Symmetrical linear profile Profilo lineare simmetrico		
Fastening Fissaggio	Caps + Magnets Magnetic end caps	Tappi + Magneti Testatine magnetiche
Screens Schermi	Opal OP30 (Screening 30%)	Opale OP30 (Scherm. 30%)
	FRS (Flux Recovery System) - Patented	FRS (Flux Recovery System) - Patented
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized (Standard) → On request other finishes ● Anodica grigia (Standard) → Su richiesta altre finiture	
Listings and marks Certificazioni e marchi	CEUKCAcULUS LISTEDEACIP20FIII	
Where we produce Dove produciamo	Made in Italy	
LED (See page CRI) LED (Vedi pagina CRI)	NICHIA Standard On request	


Light Luce

Light source Sorgente luminosa	182 LED/m • 55 LED/ft	182 LED/m • 55 LED/ft	182 LED/m • 55 LED/ft
Power consumption Consumo energia	5,0 W/m • 1,5 W/ft	9,5 W/m • 2,9 W/ft	15,7 W/m • 4,8 W/ft
CCT K	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Delivered lumen output → Screen OP30 ● 3000 K	↓ OP30 – 109 lm/W 518 lm/m • 158 lm/ft	↓ OP30 – 107 lm/W 1016 lm/m • 310 lm/ft	↓ OP30 – 102 lm/W 1601 lm/m • 488 lm/ft
Delivered lumen output → Screen FRS ● 3000 K	↓ FRS – 142 lm/W 668 lm/m • 204 lm/ft	↓ FRS – 142 lm/W 1330 lm/m • 405 lm/ft	↓ FRS – 138 lm/W 2152 lm/m • 656 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC


Aiko 8

Dimensions Dimensioni Scale/Scala 1:1

TAM Caps + Magnets
Tappi + Magneti

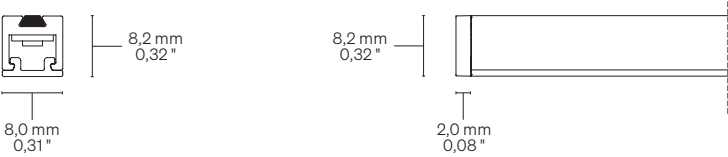


TEM Magnetic end caps
Testatine magnetiche

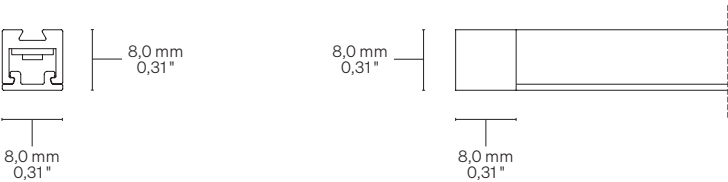


Fastening options Opzioni di fissaggio

TAM Caps + Magnets
Tappi + Magneti

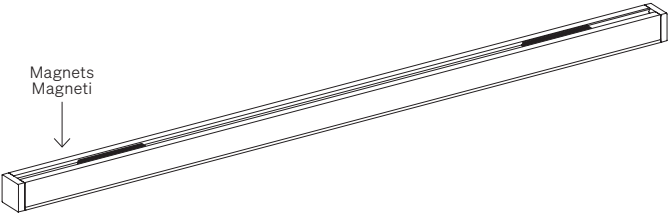

TEM Magnetic end caps
Testatine magnetiche

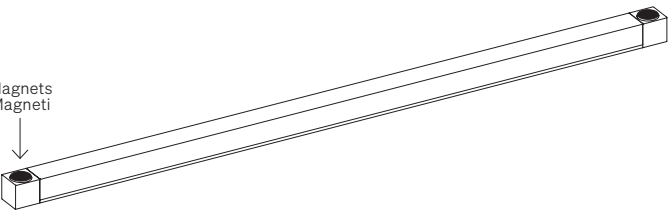

Order code Codice ordine

Basic codes Codici base	AI8F1825 Aiko 8 182 LED/m • 55 LED/ft 5,0 W/m • 1,5 W/ft AI8F1829 Aiko 8 182 LED/m • 55 LED/ft 9,5 W/m • 2,9 W/ft AI8F18215 Aiko 8 182 LED/m • 55 LED/ft 15,7 W/m • 4,8 W/ft
CCT K CCT K	WW18 1800 K WW20 2000 K WW22 2200 K WW25 2500 K WW27 2700 K WW30 3000 K NW35 3500 K NW 4000 K CW 5000 K
Fastening options Opzioni di fissaggio	TAM Caps + Magnets Tappi + Magneti TEM Magnetic end caps Testatine magnetiche
Screens Schermi	OP30 Opal 30/Opale 30 FR FRS (Flux Recovery System)
Ordering length Lunghezza ordinabile	-- → Specify the custom size or visit formulaluci.com, for standard length. → Specificare la misura custom oppure visitare il sito formulaluci.com, per le lunghezze standard.
Order example Esempio ordine	AI8F1825 WW18 TAM OP30 • 0,32 Aiko 8, 182 LED/m • 55 LED/ft, 5,0 W/m • 1,5 W/ft, Warm White 1800, Caps + Magnets, Opal 30 screen • 0,32 m Aiko 8, 182 LED/m, 5,0 W/m, Warm White 1800, Tappi + Magneti, Schermo opale 30 • 0,32 m

CRI Typical* CRI Tipici*




R9050 – H6 • 3SDCM

High Efficacy

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

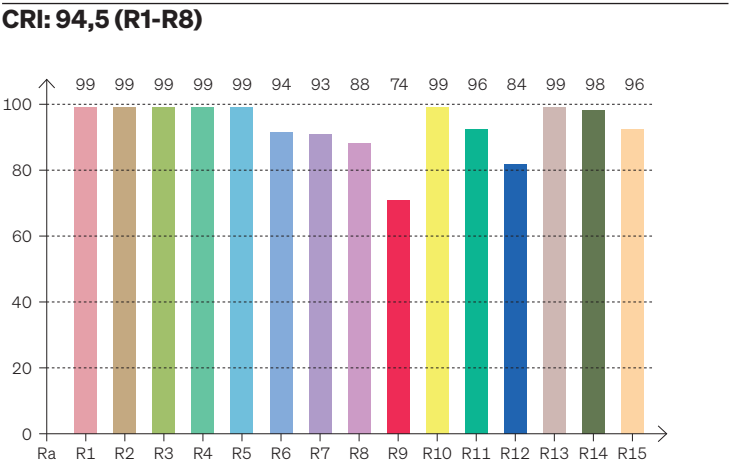

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,4	99	99	99	99	99	94	93	88	74	99	96	84	99	98	96

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3042 K	96,2	74,4	92,2	100,5	92,9	0,441	0,399	0,255	0,347	-0,0009




FULL SPECTRUM • 3SDCM

OPTISOLIS™

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

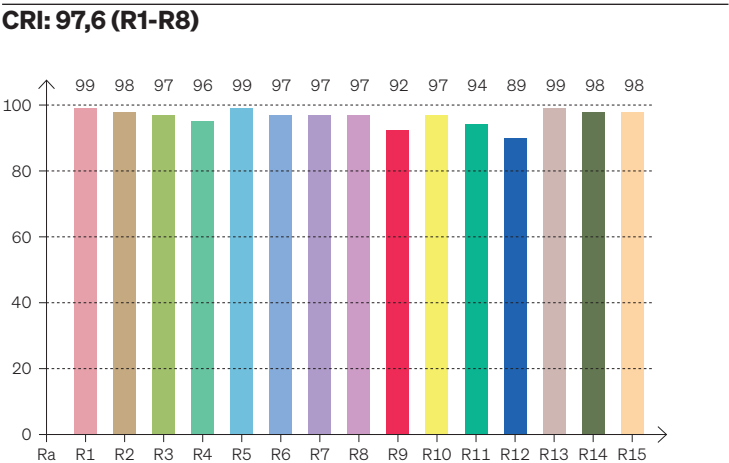

CRI Values Valori CRI

CCTK: ● 3000 K




CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,6	99	98	97	96	99	97	97	97	92	97	94	89	99	98	98

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3491 K	97,6	92,2	95,2	102,7	96,5	0,404	0,386	0,237	0,339	-0,0019

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

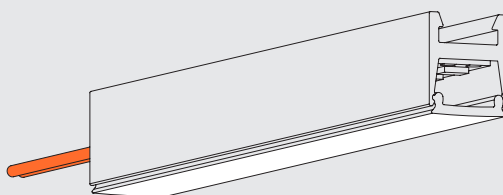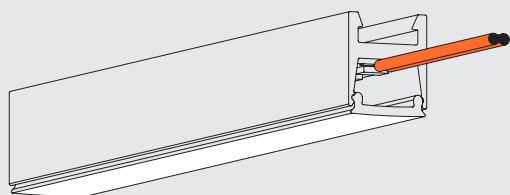

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperatura e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.