

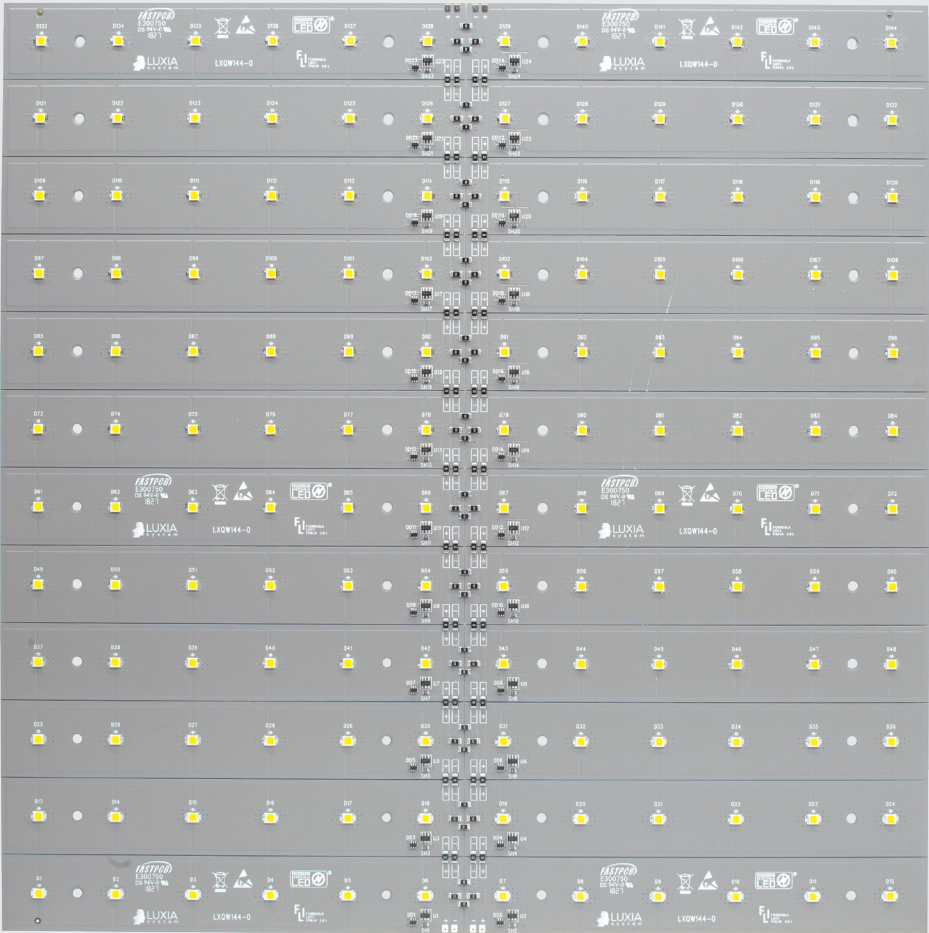


Area 144

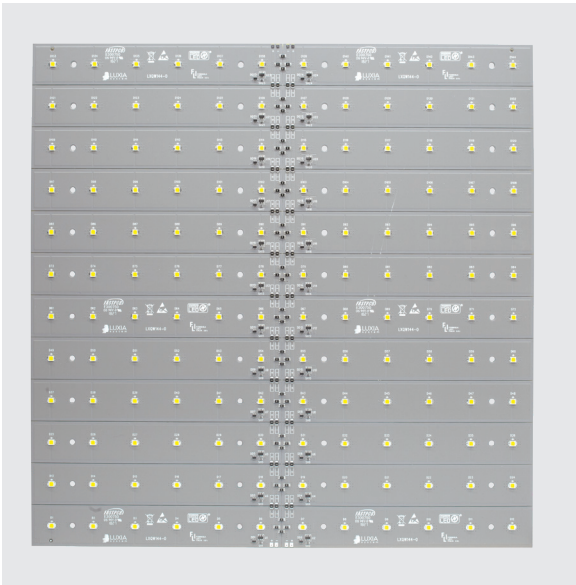

Area 144




Body Corpo		
Self-dissipating LED circuit Circuito LED autodissipante		
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Listings and marks Certificazioni e marchi	     	
Where we produce Dove produciamo		
LED (See page CRI) LED (Vedi pagina CRI)	 	

Light Luce	
Light source Sorgente luminosa	144 LED
Power consumption Consumo energia	21,1 W
CCT K	 2700 K  3000 K  3500 K  4000 K  5000 K  5700 K
On request/Su richiesta:  Mixing/Miscelazione	
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3
Delivered lumen output Flusso luminoso emesso  3000 K	128 lm/W 2694 lm
Input voltage Tensione di ingresso	24 V DC

Area 144

Dimensions Dimensioni


Scale/Scala 1:4

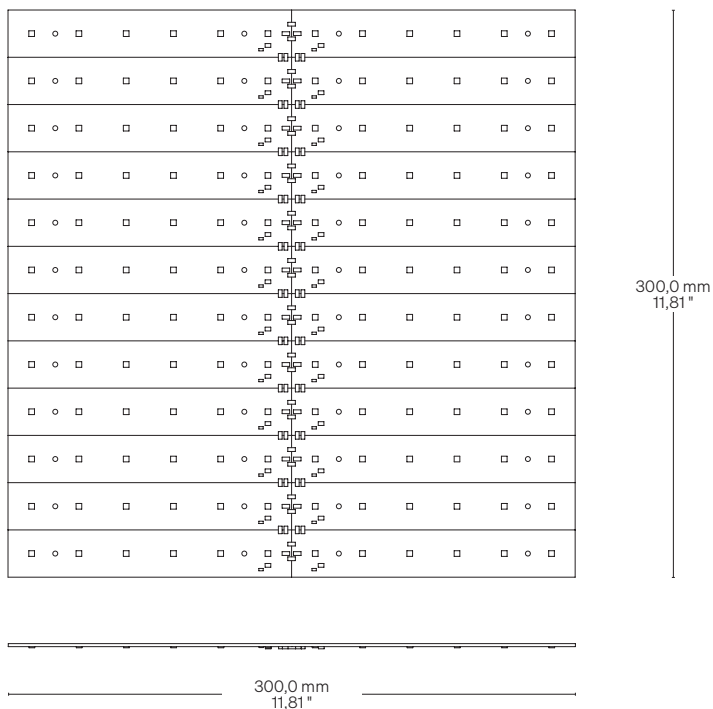

Fastening options Opzioni di fissaggio

Hole size for fixing: Ø 3,0 mm • Ø 0,12 "

Diametro foro per fissaggio: Ø 3,0 mm

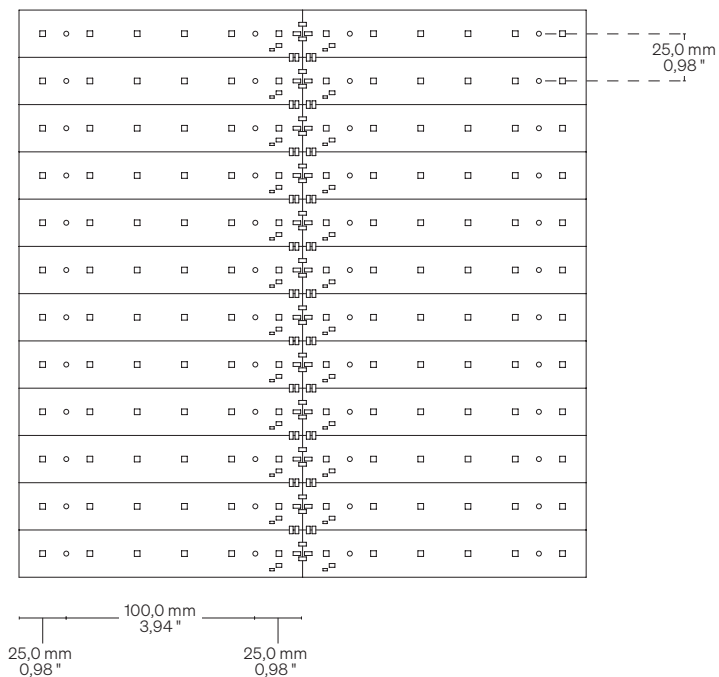

Order code	Codice ordine
------------	---------------

Basic code Codice base	• A144 Area 144
CCT K CCT K	• WW27 2700 K • WW30 3000 K • NW35 3500 K • NW 4000 K • CW 5000 K • CW57 5700 K
Order example Esempio ordine	• A144 WW27 Area 144, Warm White 2700 Area 144, Warm White 2700

CRI Typical* CRI Tipici*




R9050 – H6 • 3SDCM

High Efficacy

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

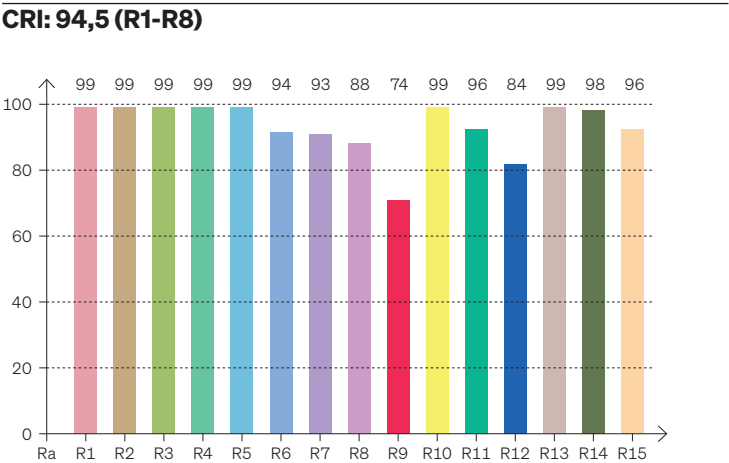

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,4	99	99	99	99	99	94	93	88	74	99	96	84	99	98	96

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3042 K	96,2	74,4	92,2	100,5	92,9	0,441	0,399	0,255	0,347	-0,0009

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.