



Tokio P5/P7

P5 → 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft
P7 → 14 LED/m • 4 LED/ft
15,4 W/m • 4,7 W/ft



19,5 × 19,5 mm
0,77 × 0,77 "

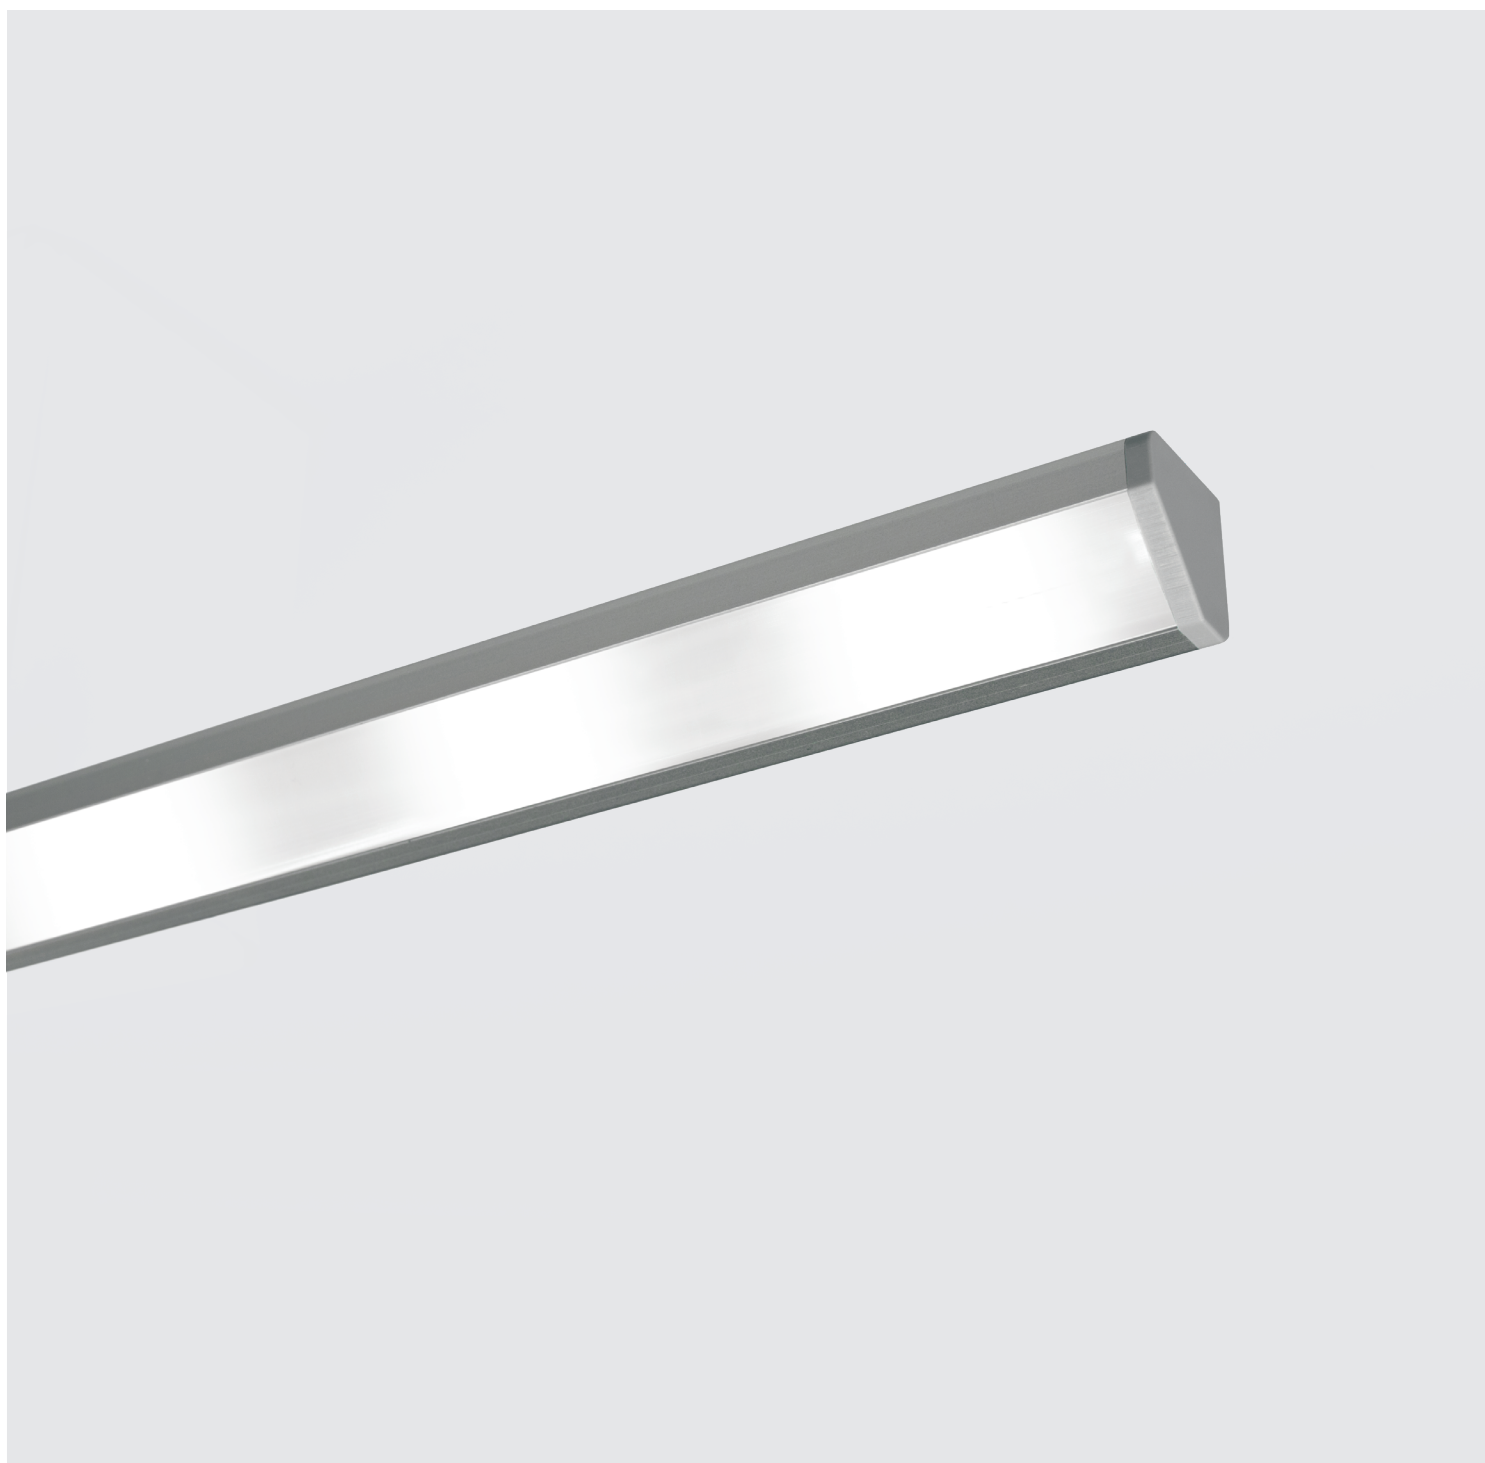

Tokio P5/P7



Sharp Angled


Body Corpo		
Angled linear profile Profilo lineare angolari		
Fastening Fissaggio	Caps + Plastic Clips Caps + Magnets	Tappi + Clip in plastica Tappi + Magneti
Screen Schermo	Opal OP30 (Screening 30%)	Opale OP30 (Scherm. 30%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		
UL Mark → Only for P5 (55,5 mm • 2,19 ") UL Mark → Solo per P5 (55,5 mm)		
LED LED	NICHIA	

Light Luce		
Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
Luminous flux Flusso luminoso ● 3000 K	↓ OP30 – 55 lm/W 1090 lm/m • 332 lm/ft	↓ OP30 – 55 lm/W 852 lm/m • 260 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC


Tokio P5/P7

Dimensions Dimensioni Scale/Scala 1:1

TA Caps + Plastic Clips
Tappi + Clip in plastica

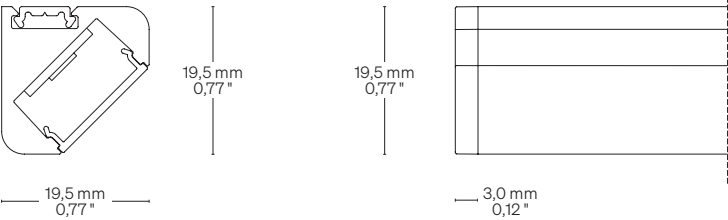


TAM Caps + Magnets
Tappi + Magneti

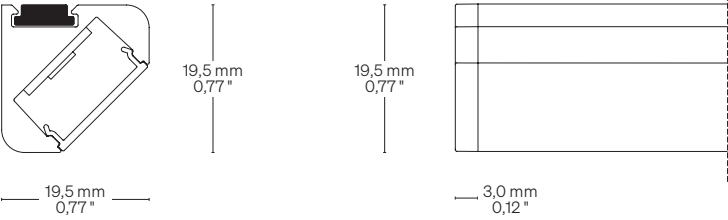


Fastening options Opzioni di fissaggio

TA Caps + Plastic Clips
Tappi + Clip in plastica

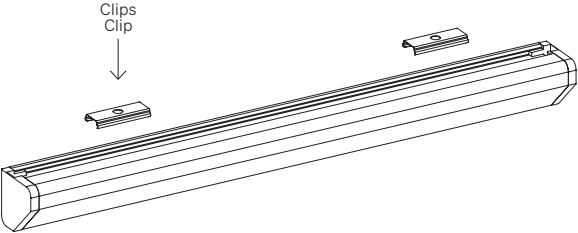

TAM Caps + Magnets
Tappi + Magneti

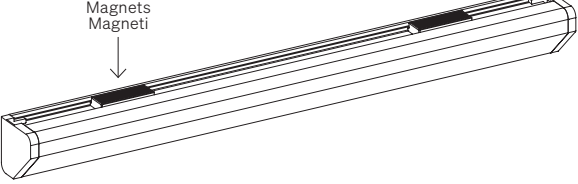


Order code Codice ordine

Basic code Codice base	TK5	Tokio P5 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft
	TK7	Tokio P7 14 LED/m • 4 LED/ft 15,4 W/m • 4,7 W/ft
CCT K CCT K	WW27	2700 K
	WW30	3000 K
Fastening options Opzioni di fissaggio	NW35	3500 K
	NW	4000 K
Screen Schermo	CW	5000 K
	TA	Caps + Plastic clips Tappi + Clip in plastica
Custom size Lunghezza ordinabile	TAM	Caps + Magnets Tappi + Magneti
	OP30	Opal/Opale 30
	--	Specify the size Specificare la misura


Order example Esempio ordine	TK5 WW27 TA OP30 • 0,32
	Tokio P5, 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft, Warm White 2700, Caps + Plastic clips, Opal 30 screen • 0,32 m
	Tokio P5, 18 LED/m, 19,8 W/m, Warm White 2700, Tappi + Clip in plastica, Schermo opale 30 • 0,32 m

Cable outlet Uscita cavi

Left side Lato sinistro

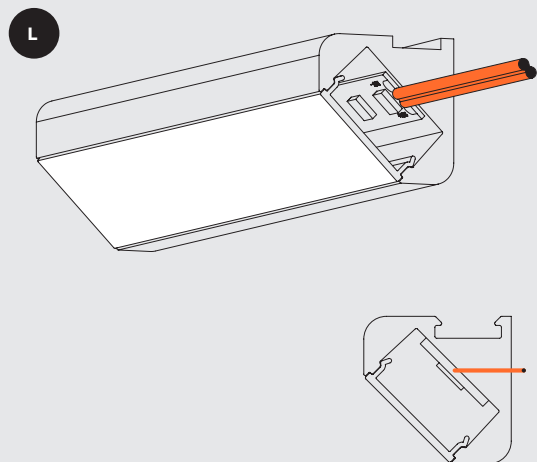

Right side Lato destro

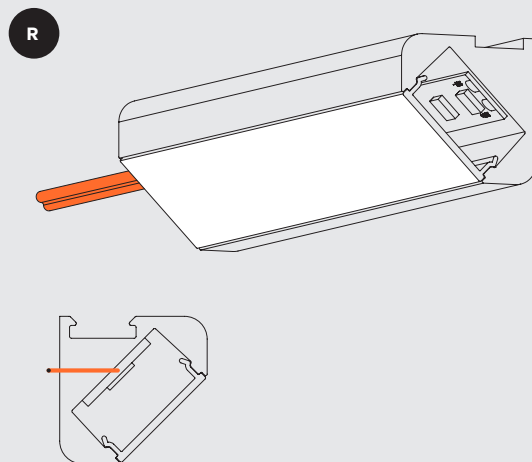

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.