



# Area 36

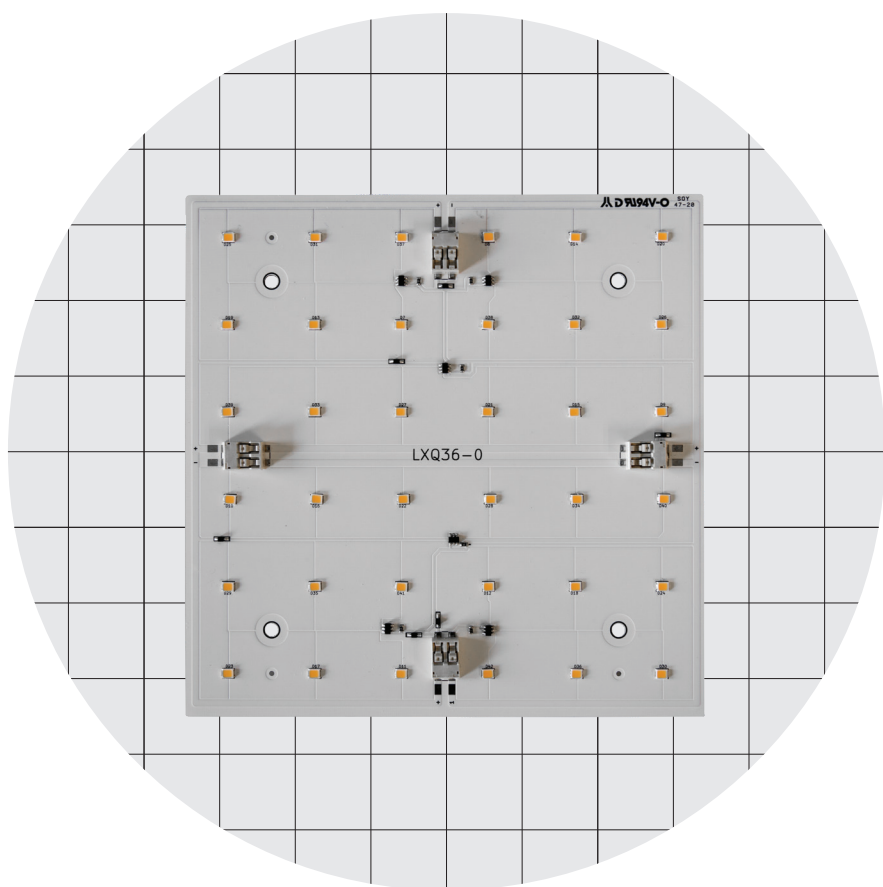

# Area 36

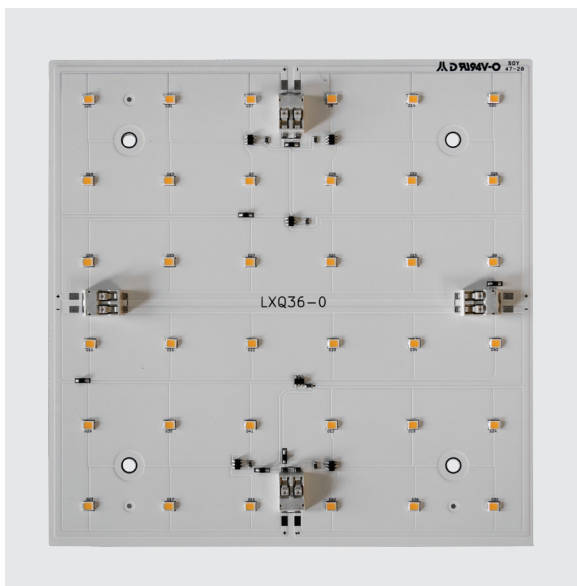

## Body Corpo

### Self-dissipating LED circuit

Circuito LED autodissipante

### Wiring set

Cavo alimentazione

2000 mm • 78,74"

2000 mm

### Listings and marks

Certificazioni e marchi



### Where we produce

Dove produciamo

Made in Italy

### LED (See page CRI)

LED (Vedi pagina CRI)



## Light Luce

### Light source

Sorgente luminosa

36 LED

### Power consumption

Consumo energia

5,2 W

### CCT K

- 2700 K
- 3000 K
- 3500 K
- 4000 K
- 5000 K
- 5700 K

### CRI

Min 90

### R9

Min 50

Rf @ 3000 K

92

Rg @ 3000 K

100

MacAdam ellipse

3

### Delivered lumen output

Flusso luminoso emesso

● 3000 K

122 lm/W

673 lm

### Input voltage


Tensione di ingresso

24 V DC

# Area 36


## Dimensions Dimensioni

Scale/Scala 1:2

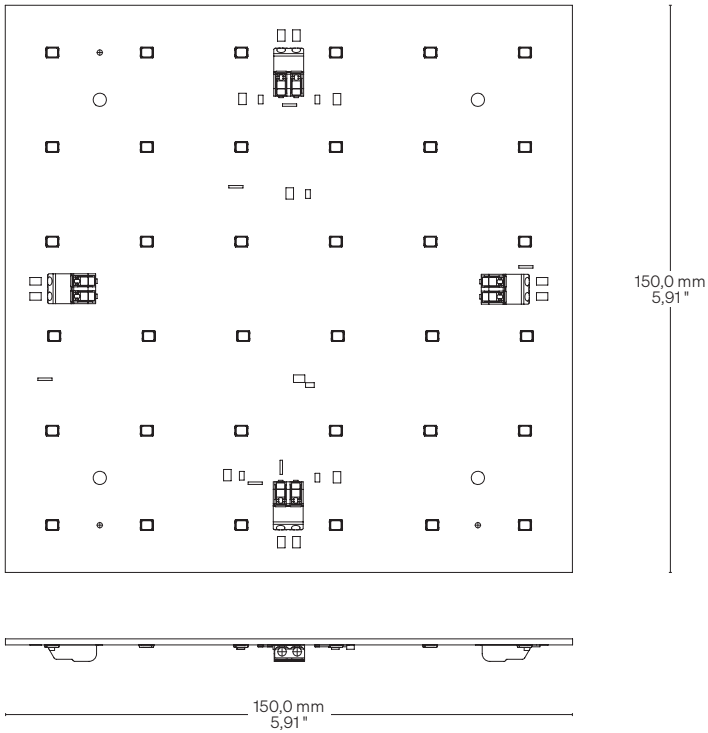

## Fastening options Opzioni di fissaggio

Hole size for fixing:  $\varnothing 3,0 \text{ mm} \cdot \varnothing 0,12 \text{ ''}$   
 Diametro foro per fissaggio:  $\varnothing 3,0 \text{ mm}$

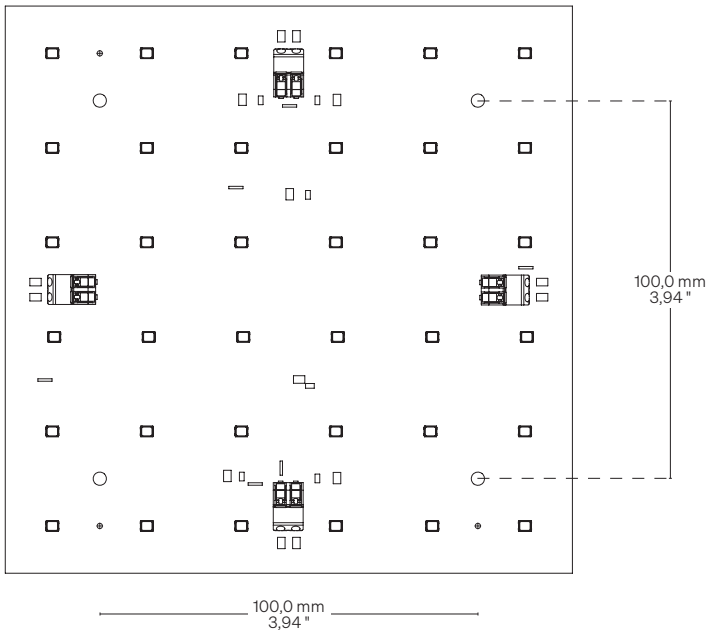

## Order code Codice ordine

**Basic code**  
Codice base

• **A36** Area 36

**CCT K**  
CCT K

• **WW27** 2700 K  
**WW30** 3000 K  
**NW35** 3500 K  
**NW** 4000 K  
**CW** 5000 K  
**CW57** 5700 K

**Order example**  
Esempio ordine

• **A36 WW27**  
 Area 36, Warm White 2700  
 Area 36, Warm White 2700

# CRI Typical\* CRI Tipici\*




**R9050 – H6 • 3SDCM**

**High Efficacy**

● 3000 K

**CRI: 94,5 (R1-R8)**

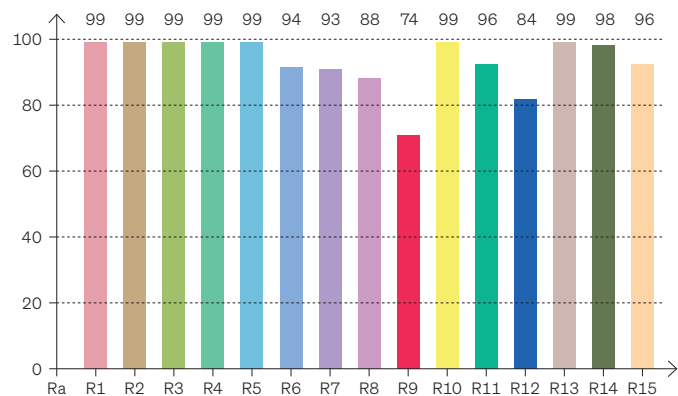

\* Values taken from sample measurements

\* Valori presi da misurazioni a campione

**CRI Values** Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
<b>94,4</b>	99	99	99	99	99	94	93	88	74	99	96	84	99	98	96

**Color Parameters** Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Deviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	$\Delta UV$
3042 K	96,2	74,4	92,2	100,5	92,9	0,441	0,399	0,255	0,347	-0,0009

# Warnings Avvertenze

---

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

---

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.