



Hida P5/P7

P5 → 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft
P7 → 14 LED/m • 4 LED/ft
15,4 W/m • 4,7 W/ft

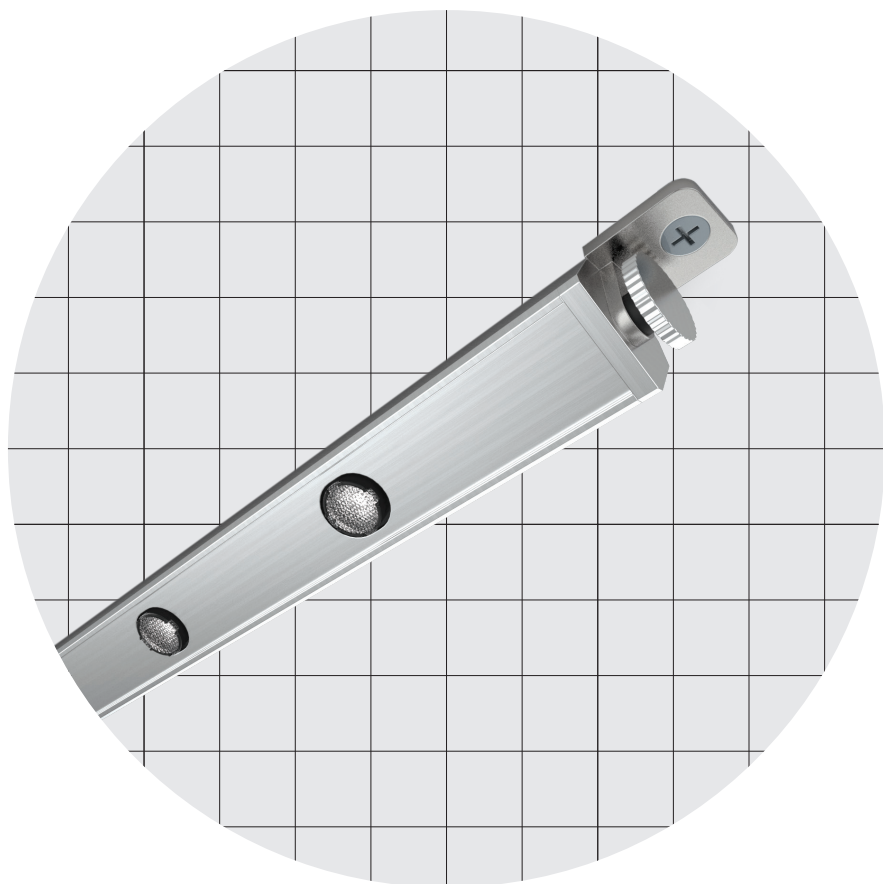

18,3 × 12,3 mm
0,72 × 0,48 "

Hida P5/P7



Spotted


Body Corpo		
Spot fixed on adjustable symmetrical linear profile Spot fissi su profilo lineare simmetrico orientabile		
Fastening Fissaggio	Adjustable heads with screws	Testatine orientabili con viti
Optics Optica	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 1500 mm • 59,06 "	Fino a 1500 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		LED LED
   		

Light Luce		
Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K Mixing on demand Miscelazione su richiesta	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 95 102 2	Min 90 Min 80 95 102 2
Luminous flux Flusso luminoso ● 3000 K	92 lm/W 1818 lm/m • 554 lm/ft	92 lm/W 1414 lm/m • 431 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC

Hida P5/P7

Dimensions Dimensioni Scale/Scala 1:1

TO Adjustable heads with screws
Testatine orientabili con viti

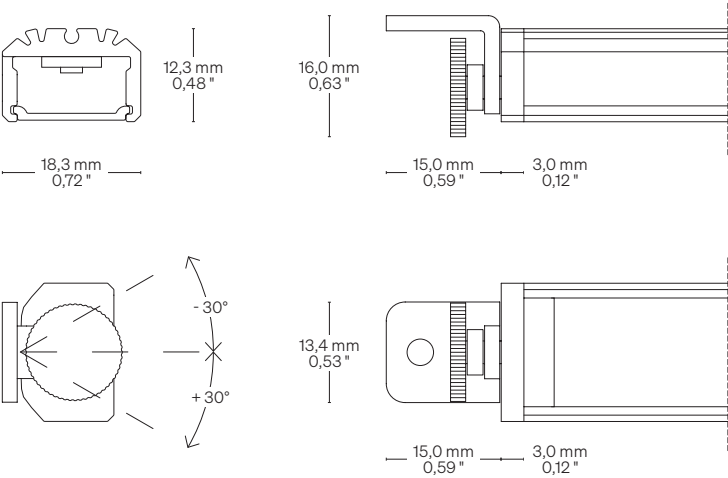

Fastening options Opzioni di fissaggio




TO Adjustable heads with screws
Testatine orientabili con viti



Order code Codice ordine		
Basic code Codice base	HI5	Hida P5 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft
	HI7	Hida P7 14 LED/m • 4 LED/ft 15,4 W/m • 4,7 W/ft
CCT K CCT K	WW27	2700 K
	WW30	3000 K
	NW35	3500 K
	NW	4000 K
	CW	5000 K
Fastening options Opzioni di fissaggio	TO	Adjustable heads with screws Testatine orientabili con viti
Optics Ottica	20	20°
	25	25°
	38	38°
	44	44°
	62	62°
	OV	Oval (45°+25°)
Custom size Lunghezza ordinabile	--	Specify the size Specificare la misura
Order example Esempio ordine	HI5 WW27 TO 20 • 0,32	
	Hida P5, 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft, Warm White 2700, Adjustable heads with screws, 20° Optic • 0,32 m	
	Hida P5, 18 LED/m, 19,8 W/m, Warm White 2700, Testatine orientabili con viti, Ottica 20° • 0,32 m	

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

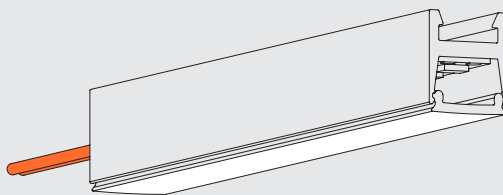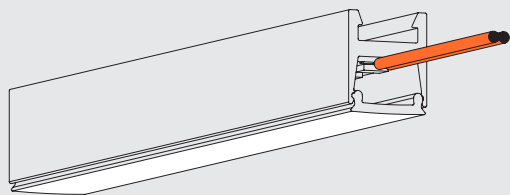

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.