



Tokio P5/P7

P5 → 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft
P7 → 14 LED/m • 4 LED/ft
15,4 W/m • 4,7 W/ft



19,5 × 19,5 mm
0,77 × 0,77 "

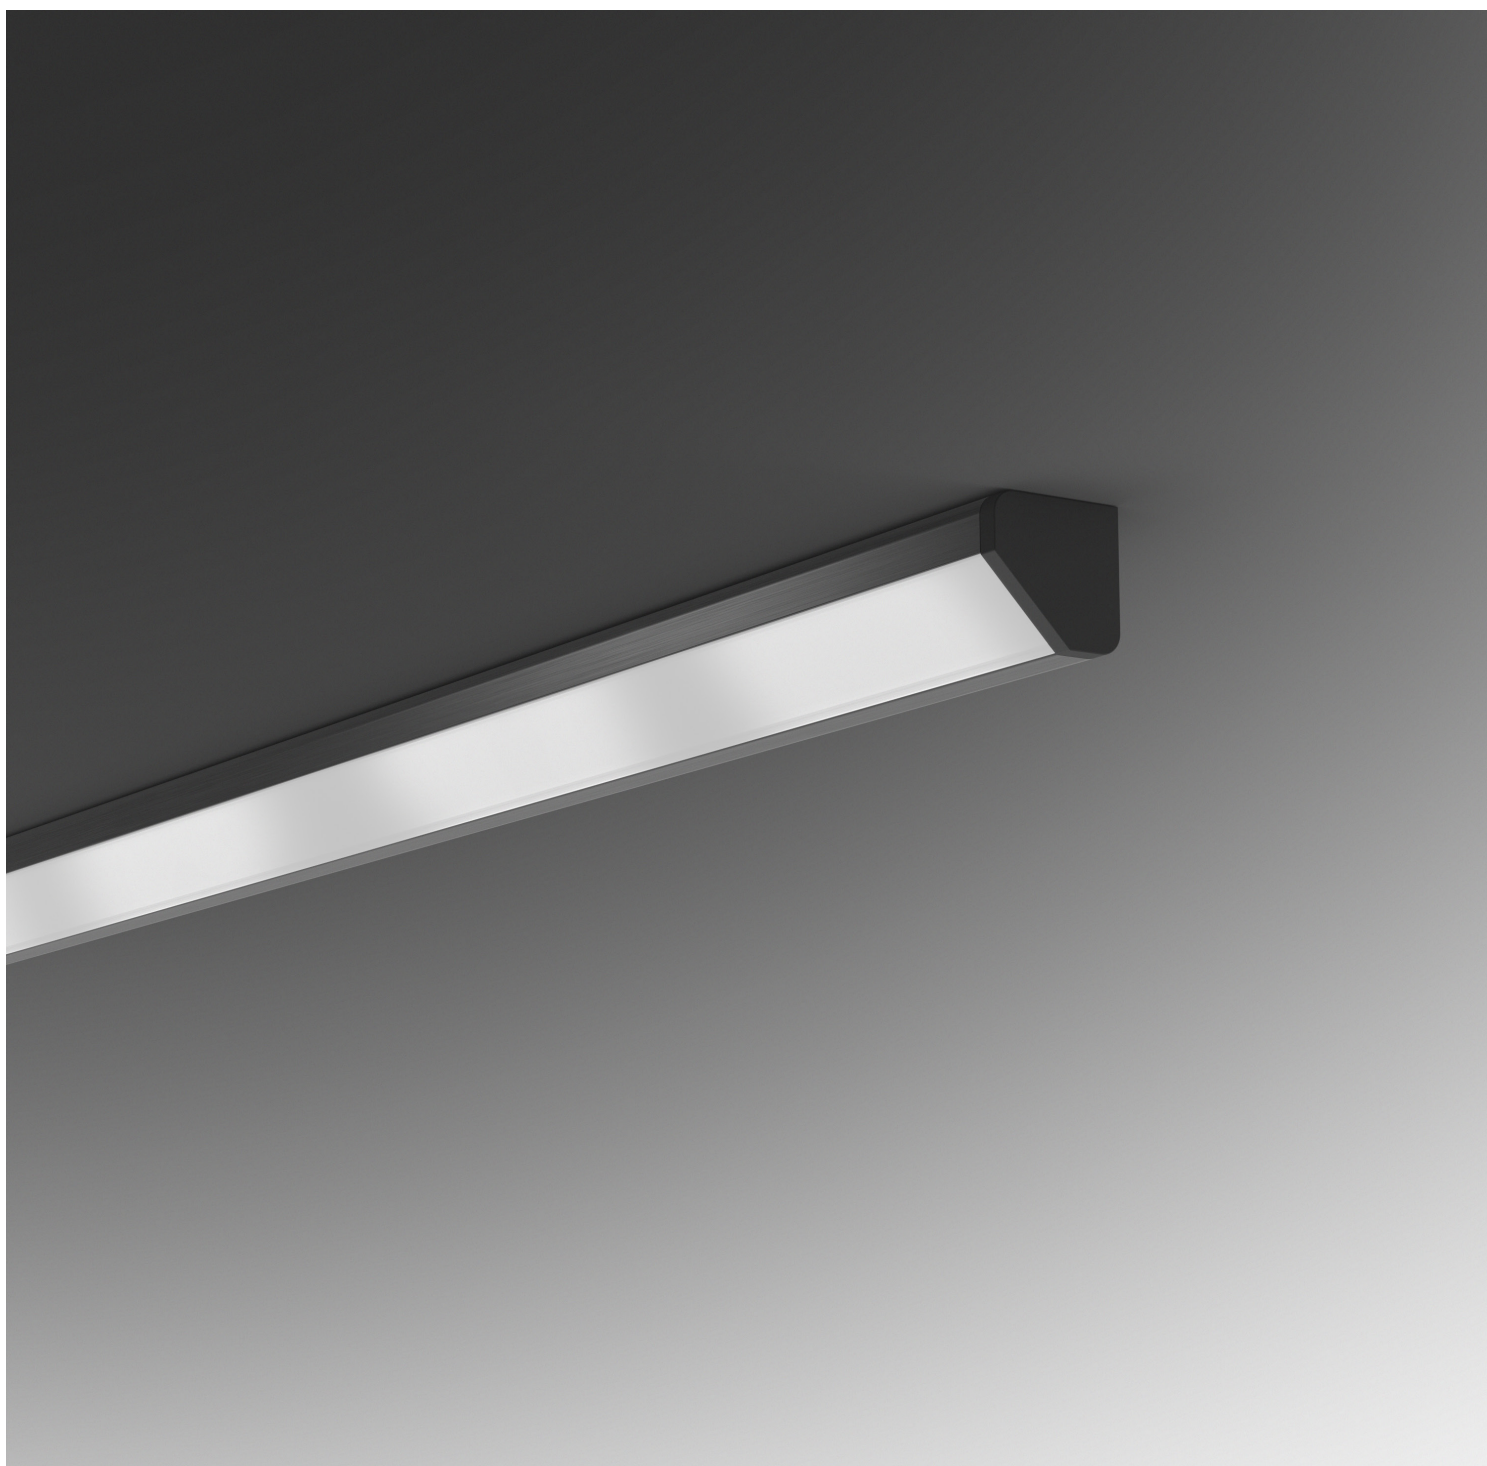

Tokio P5/P7



Sharp Angled


Body Corpo		
Angled linear profile Profilo lineare angolari		
Fastening Fissaggio	Caps + Plastic Clips Caps + Magnets	Tappi + Clip in plastica Tappi + Magneti
Screen Schermo	Opal 30 (Screening 30%)	Opale 30 (Scherm. 30%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		
UL Mark → Only for P5 (55,5 mm • 2,19 ") UL Mark → Solo per P5 (55,5 mm)		
LED LED	NICHIA	

Light Luce		
Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
Luminous flux Flusso luminoso ● 3000 K	↓ O3 – 55 lm/W 1090 lm/m • 332 lm/ft	↓ O3 – 55 lm/W 852 lm/m • 260 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC


Tokio P5/P7

Dimensions Dimensioni Scale/Scala 1:1

TA Caps + Plastic Clips
Tappi + Clip in plastica

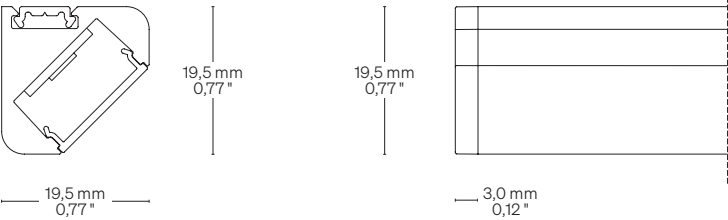


TAM Caps + Magnets
Tappi + Magneti

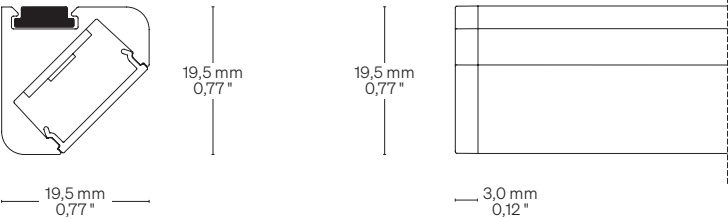


Fastening options Opzioni di fissaggio

TA Caps + Plastic Clips
Tappi + Clip in plastica

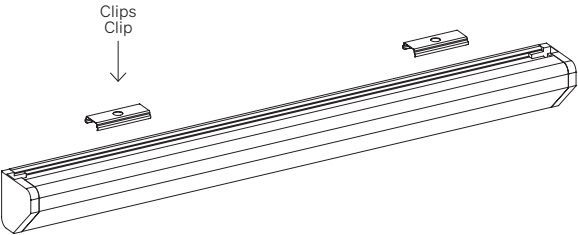

TAM Caps + Magnets
Tappi + Magneti

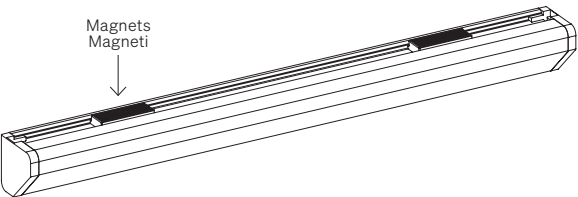

Order code Codice ordine

Basic code Codice base	TKP5 TKP7	Tokio P5 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft Tokio P7 14 LED/m • 4 LED/ft 15,4 W/m • 4,7 W/ft
CCT K CCT K	27 30 35 40 50	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Fastening options Opzioni di fissaggio	TA TAM	Caps + Plastic clips Tappi + Clip in plastica Caps + Magnets Tappi + Magneti
Screen Schermo	O3	Opal/Opale 30
Finishing Finitura	01	● Grey anodized ● Anodica grigia
Custom size Lunghezza ordinabile	--	Specify the size Specificare la misura

Order example Esempio ordine

TKP5 27 TA O3 01 • 0,32

Tokio P5, 18 LED/m • 5 LED/ft
19,8 W/m • 6,0 W/ft, Warm White 2700,
Caps + Plastic clips, Opal 30 screen,
Grey anodized • 0,32 m



Tokio P5, 18 LED/m, 19,8 W/m,
Warm White 2700, Tappi + Clip in plastica,
Schermo opale 30, Anodica grigia • 0,32 m

Tokio P5/P7

Cable outlet Uscita cavi

Left side



Lato sinistra

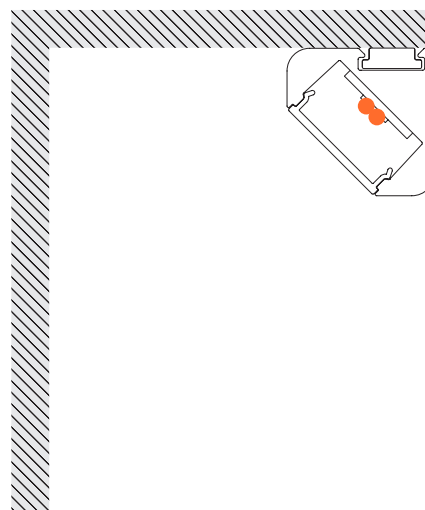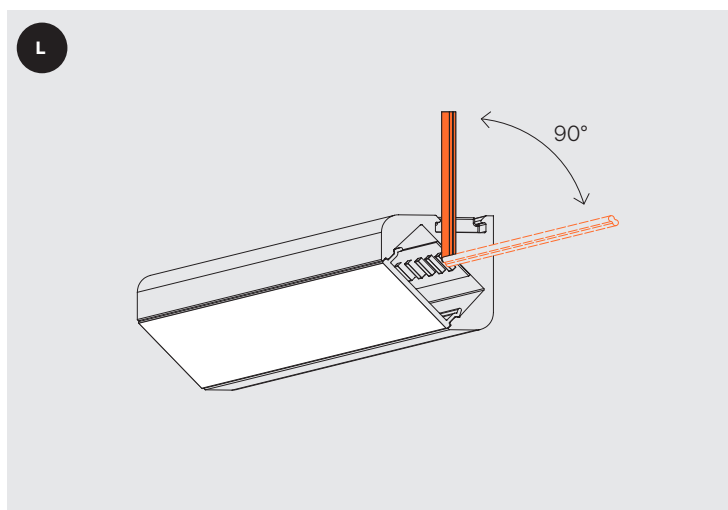

Scale/Scala 1:1

Right side

Lato destro

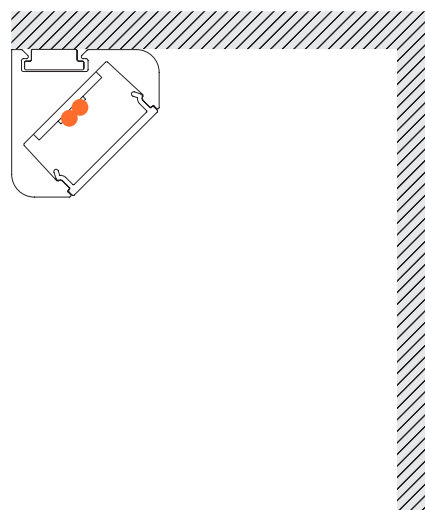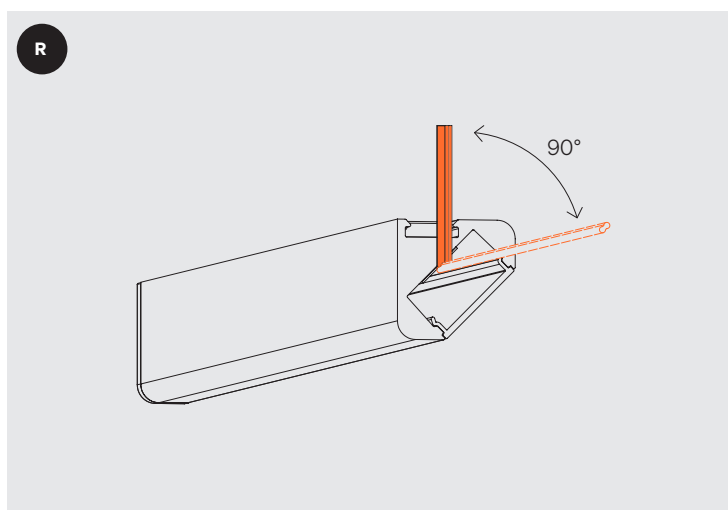

Scale/Scala 1:1

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.