

Tokio

144 LED/m • 44 LED/ft

10,0 W/m • 3,1 W/ft

168 LED/m • 52 LED/ft



15,0 W/m • 4,6 W/ft

182 LED/m • 56 LED/ft

20,0 W/m • 6,1 W/ft

TW - 252 LED/m • 77 LED/ft Tunable White

20,0 W/m • 6,1 W/ft

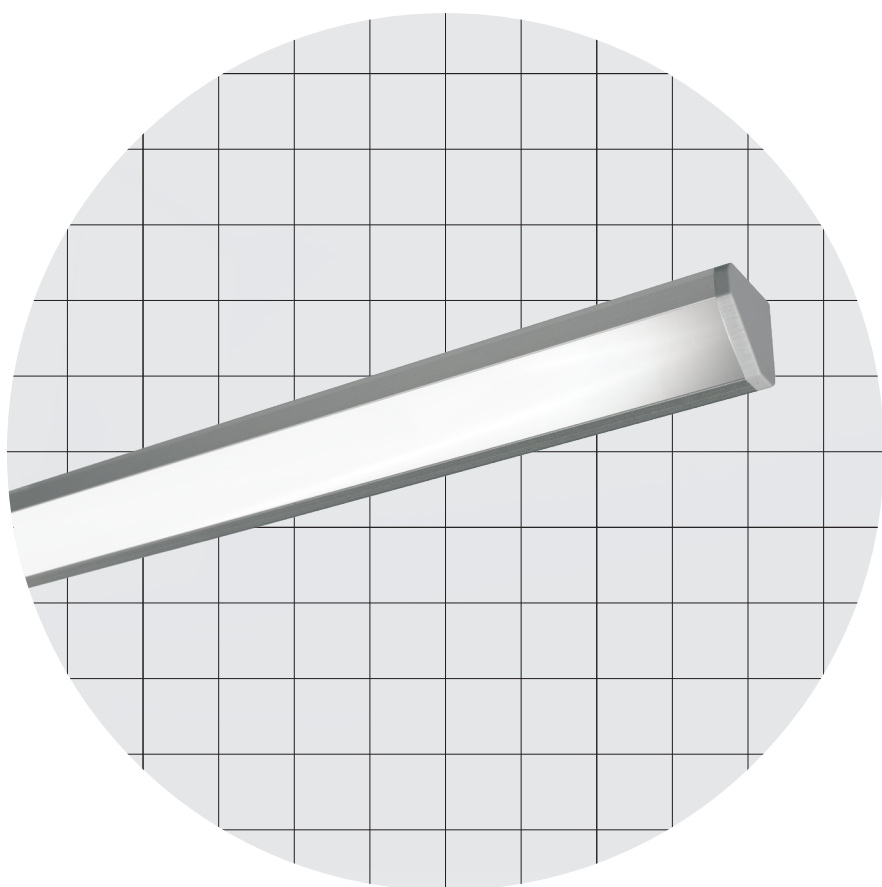

19,5 × 19,5 mm

0,77 × 0,77 "



Sharp Angled


Body Corpo		
Angled linear profile Profilo lineare angolare		
Fastening Fissaggio	Caps + Plastic Clips Caps + Magnets	Tappi + Clip in plastica Tappi + Magneti
Screen Schermo	Opal OP30 (Screening 30%)	Opale OP30 (Scherm. 30%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,11 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		LED LED
    		

Light Luce


Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
CCT K Mixing on demand Miscelazione su richiesta	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2200 - 5700 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Luminous flux Flusso luminoso ● 3000 K	↓ OP30 – 82 lm/W 822 lm/m • 251 lm/ft	↓ OP30 – 88 lm/W 1332 lm/m • 406 lm/ft	↓ OP30 – 104 lm/W 2080 lm/m • 634 lm/ft	↓ OP30 – 58 lm/W 1155 lm/m • 352 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC

Dimensions Dimensioni Scale/Scala 1:1

TA Caps + Plastic Clips
Tappi + Clip in plastica

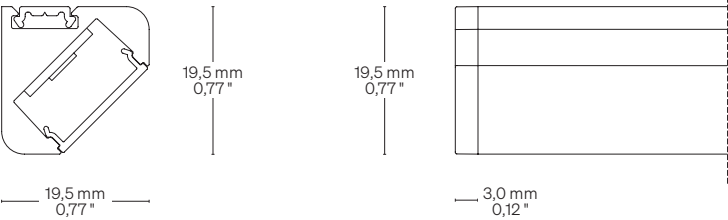


TAM Caps + Magnets
Tappi + Magneti

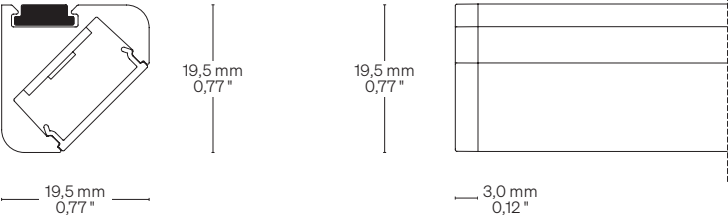


Fastening options Opzioni di fissaggio

TA Caps + Plastic Clips
Tappi + Clip in plastica

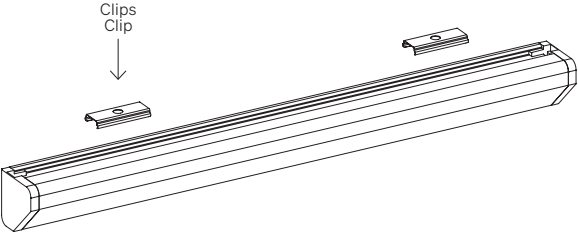

TAM Caps + Magnets
Tappi + Magneti

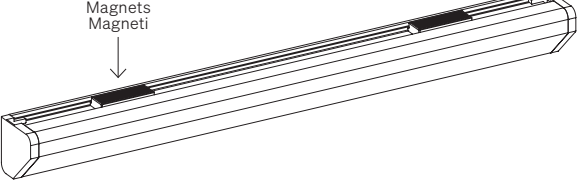


Order code Codice ordine

Basic codes Codici base	TKF144 Tokio 144 LED/m • 44 LED/ft 10,0 W/m • 3,1 W/ft
	TKF168 Tokio 168 LED/m • 52 LED/ft 15,0 W/m • 4,6 W/ft
	TKF182 Tokio 182 LED/m • 56 LED/ft 20,0 W/m • 6,1 W/ft
	TKF252 Tokio TW 252 LED/m • 77 LED/ft 2200 - 5700 K 20,0 W/m • 6,1 W/ft
CCT K CCT K	WW27 2700 K WW30 3000 K NW35 3500 K NW 4000 K CW 5000 K
Fastening options Opzioni di fissaggio	TA Caps + Plastic clips Tappi + Clip in plastica TAM Caps + Magnets Tappi + Magneti
Screens Schermi	OP30 Opal/Opale 30
Custom size Lunghezza ordinabile	-- Specify the size Specificare la misura


Order example Esempio ordine	TKF144 WW27 TA OP30 • 0,32 Tokio, 144 LED/m • 44 LED/ft, 10,0 W/m • 3,1 W/ft, Warm White 2700, Caps + Plastic clips, Opal 30 screen • 0,32 m Tokio, 144 LED/m, 10,0 W/m, Warm White 2700, Tappi + Clip in plastica, Schermo opale 30 • 0,32 m
--	---

Cable outlet Uscita cavi

Left side Lato sinistro

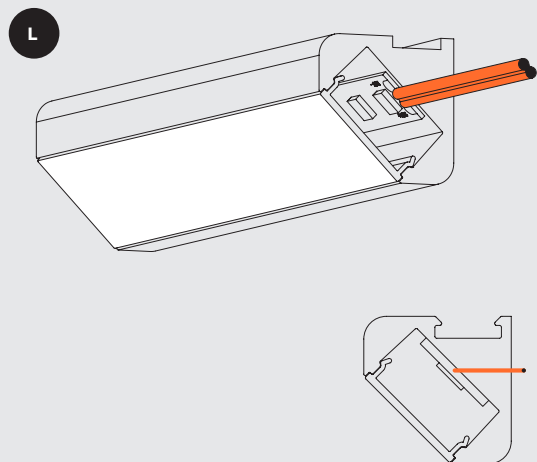

Right side Lato destro

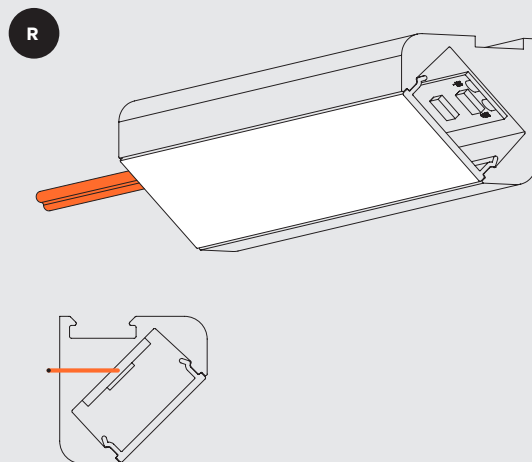

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.