


# Mirage P5/P7

**P5 → 18 LED/m • 5 LED/ft**  
19,8 W/m • 6,0 W/ft  
**P7 → 14 LED/m • 4 LED/ft**  
15,4 W/m • 4,7 W/ft



**22,5 × 10,0 mm**  
**0,89 × 0,39 "**



# Mirage P5/P7



Sharp

## Body Corpo

**Recessed symmetrical linear profile**  
Profilo lineare simmetrico per incasso

|                                            |                                                                                             |                                                                                             |
|--------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>Fastening</b><br>Fissaggio              | Pressure                                                                                    | A pressione                                                                                 |
| <b>Screen</b><br>Schermo                   | Transparent 5<br>(Screening 5%)<br>Opal 20<br>(Screening 20%)<br>Opal 50<br>(Screening 50%) | Trasparente 5<br>(Schermatura 5%)<br>Opale 20<br>(Scherm. 20%)<br>Opale 50<br>(Scherm. 50%) |
| <b>Wiring set</b><br>Cavo alimentazione    | 2000 mm • 78,74 "                                                                           | 2000 mm                                                                                     |
| <b>Custom size</b><br>Lunghezza ordinabile | Up to 2000 mm • 78,74 "                                                                     | Fino a 2000 mm                                                                              |
| <b>Finishing</b><br>Finitura               | ● Grey anodized                                                                             | ● Anodica grigia                                                                            |

**Listings and marks**  
Certificazioni e marchi



**LED**  
LED




## Light Luce

|                                                                                               |                                                          |                                                          |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|
| <b>Pitch</b><br>Passo                                                                         | <b>↓ P5</b><br>55,5 mm • 2,19 "                          | <b>↓ P7</b><br>71,4 mm • 2,81 "                          |
| <b>Light source</b><br>Sorgente luminosa                                                      | 18 LED/m • 5 LED/ft                                      | 14 LED/m • 4 LED/ft                                      |
| <b>Power consumption</b><br>Consumo energia                                                   | 19,8 W/m • 6,0 W/ft                                      | 15,4 W/m • 4,7 W/ft                                      |
| <b>CCT K</b><br><br>Mixing on demand<br>Miscelazione su richiesta                             | ● 2700 K<br>● 3000 K<br>● 3500 K<br>● 4000 K<br>● 5000 K | ● 2700 K<br>● 3000 K<br>● 3500 K<br>● 4000 K<br>● 5000 K |
| <b>CRI</b><br><b>R9</b><br><b>Rf @ 3000 K</b><br><b>Rg @ 3000 K</b><br><b>MacAdam ellipse</b> | Min 90<br>Min 80<br>96<br>103<br>2                       | Min 90<br>Min 80<br>96<br>103<br>2                       |
| <b>Luminous flux</b><br>Flusso luminoso<br>● 3000 K                                           | <b>↓ O2</b> – 62 lm/W<br>1232 lm/m • 376 lm/ft           | <b>↓ O2</b> – 63 lm/W<br>962 lm/m • 293 lm/ft            |
| <b>Input voltage</b><br>Tensione di ingresso                                                  | 24 V DC                                                  | 24 V DC                                                  |

# Mirage P5/P7


Dimensions Dimensioni Scale/Scala 1:1

**P** Pressure  
A pressione

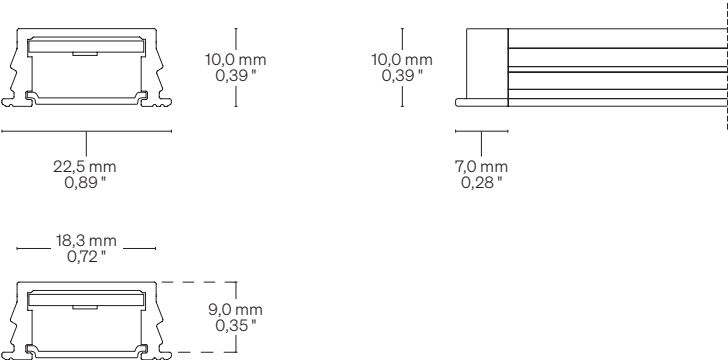

## Fastening options Opzioni di fissaggio



**P** Pressure (Milling size: 20,0 mm • Ø 0,79")  
A pressione (Dimensione fresatura: 20,0 mm)

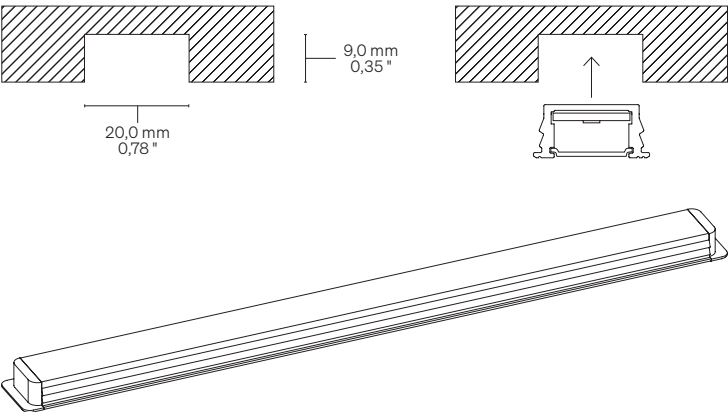

| Order code Codice ordine                                                                                                 |     |                                                         |
|--------------------------------------------------------------------------------------------------------------------------|-----|---------------------------------------------------------|
| Basic code<br>Codice base                                                                                                | MA5 | Mirage P5<br>18 LED/m • 5 LED/ft<br>19,8 W/m • 6,0 W/ft |
|                                                                                                                          | MA7 | Mirage P7<br>14 LED/m • 4 LED/ft<br>15,4 W/m • 4,7 W/ft |
| CCT K<br>CCT K                                                                                                           | 27  | 2700 K                                                  |
|                                                                                                                          | 30  | 3000 K                                                  |
|                                                                                                                          | 35  | 3500 K                                                  |
|                                                                                                                          | 40  | 4000 K                                                  |
|                                                                                                                          | 50  | 5000 K                                                  |
| Screen<br>Schermo                                                                                                        | T5  | Transparent/Trasparente 5                               |
|                                                                                                                          | O2  | Opal/Opale 20                                           |
|                                                                                                                          | O5  | Opal/Opale 50                                           |
| Finishing<br>Finitura                                                                                                    | 01  | Grey anodized<br>Anodica grigia                         |
|                                                                                                                          | --  | Specify the size<br>Specificare la misura               |
| Order example<br>Esempio ordine                                                                                          |     |                                                         |
| MA5 27 T5 01 • 0,32                                                                                                      |     |                                                         |
| Mirage, 18 LED/m • 5 LED/ft,<br>19,8 W/m • 6,0 W/ft, Warm White 2700,<br>Transparent 5 Screen, Grey anodized •<br>0,32 m |     |                                                         |
| Mirage, 18 LED/m, 19,8 W/m,<br>Warm White 2700, Schermo trasparente 5,<br>Anodica grigia • 0,32 m                        |     |                                                         |

# Mirage P5/P7

**Cable outlet** Uscita cavi

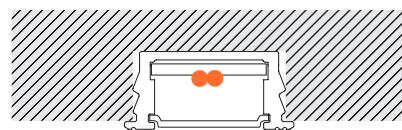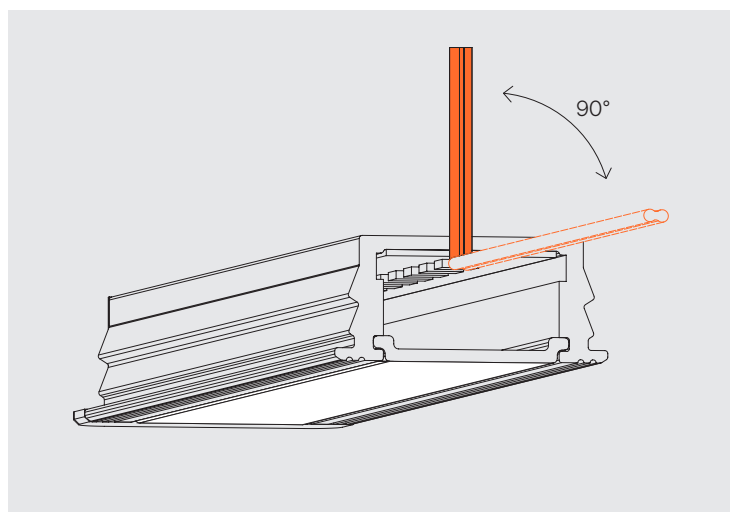

Scale/Scala 1:1

# Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.