


Mirage P5/P7

P5 → 18 LED/m • 5 LED/ft


19,8 W/m • 6,0 W/ft

P7 → 14 LED/m • 4 LED/ft

15,4 W/m • 4,7 W/ft



22,5 × 10,0 mm
0,89 × 0,39 "

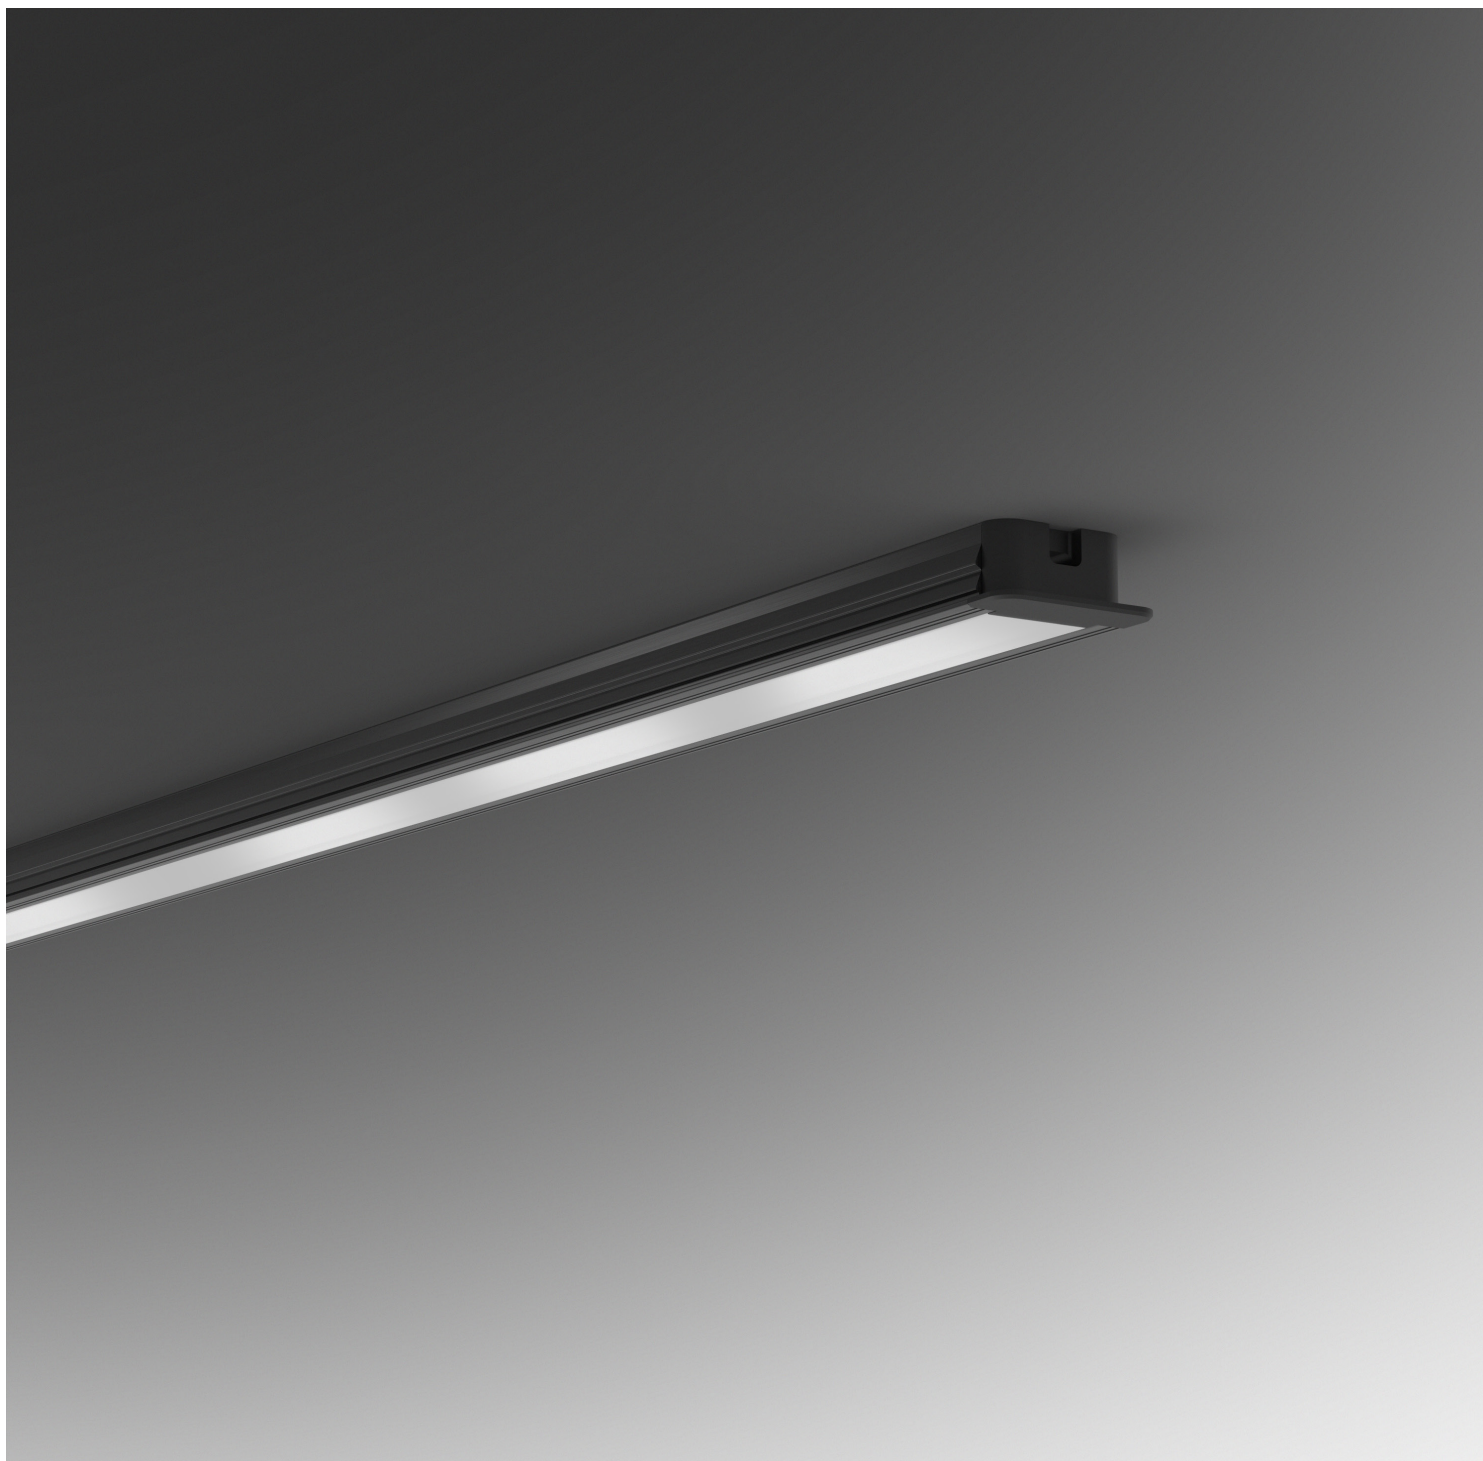

Mirage P5/P7



Sharp


Body Corpo		
Recessed symmetrical linear profile Profilo lineare simmetrico per incasso		
Fastening Fissaggio	Pressure	A pressione
Screen Schermo	Transparent 5 (Screening 5%) Opal 20 (Screening 20%) Opal 50 (Screening 50%)	Trasparente 5 (Schermatura 5%) Opale 20 (Scherm. 20%) Opale 50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 2000 mm • 78,74 "	Fino a 2000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		
LED		
LED		
CE UK CA IP20 F III		
NICHIA		

Light Luce		
Pitch Passo	↓ P5 55,5 mm • 2,19 "	↓ P7 71,4 mm • 2,81 "
Light source Sorgente luminosa	18 LED/m • 5 LED/ft	14 LED/m • 4 LED/ft
Power consumption Consumo energia	19,8 W/m • 6,0 W/ft	15,4 W/m • 4,7 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
Luminous flux Flusso luminoso ● 3000 K	↓ O2 – 62 lm/W 1232 lm/m • 376 lm/ft	↓ O2 – 63 lm/W 962 lm/m • 293 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC

Mirage P5/P7


Dimensions Dimensioni Scale/Scala 1:1

P Pressure
A pressione

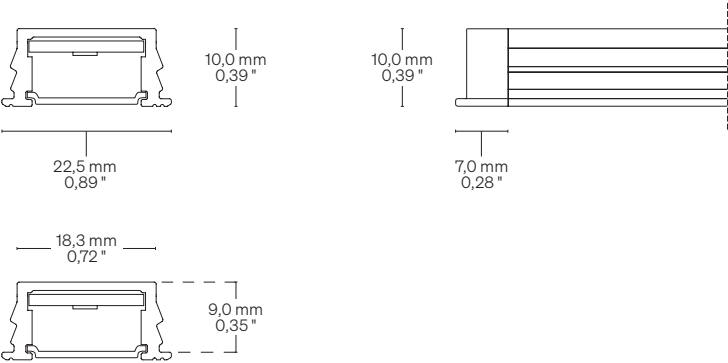

Fastening options Opzioni di fissaggio

P Pressure (Milling size: 20,0 mm • Ø 0,79")
A pressione (Dimensione fresatura: 20,0 mm)

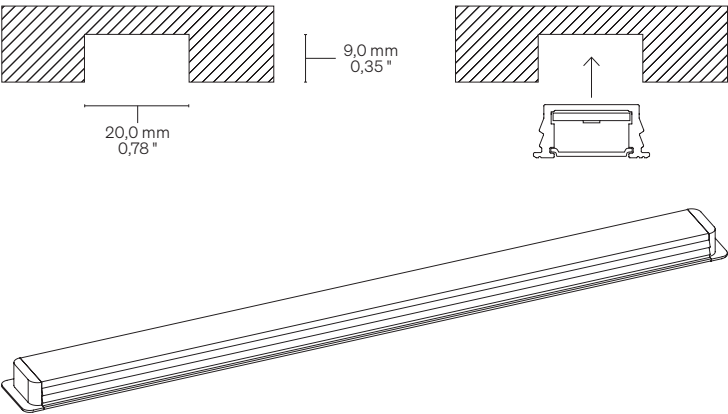



Order code Codice ordine

Basic code Codice base	MA5 MA7	Mirage P5 18 LED/m • 5 LED/ft 19,8 W/m • 6,0 W/ft Mirage P7 14 LED/m • 4 LED/ft 15,4 W/m • 4,7 W/ft
CCT K CCT K	27 30 35 40 50	2700 K 3000 K 3500 K 4000 K 5000 K
Screen Schermo	T5 O2 O5	Transparent/Trasparente 5 Opal/Opale 20 Opal/Opale 50
Finishing Finitura	01	Grey anodized Anodica grigia
Custom size Lunghezza ordinabile	--	Specify the size Specificare la misura

Order example Esempio ordine	MA5 27 T5 01 • 0,32 Mirage, 18 LED/m • 5 LED/ft, 19,8 W/m • 6,0 W/ft, Warm White 2700, Transparent 5 Screen, Grey anodized • 0,32 m Mirage, 18 LED/m, 19,8 W/m, Warm White 2700, Schermo trasparente 5, Anodica grigia • 0,32 m
--	---

Mirage P5/P7

Cable outlet Uscita cavi

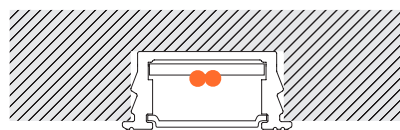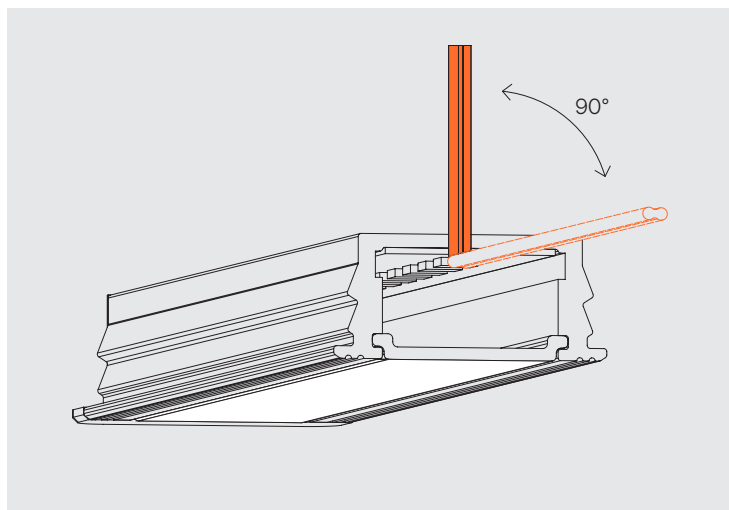

Scale/Scala 1:1

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.