

144 LED/m • 44 LED/ft

10,0 W/m • 3,1 W/ft

168 LED/m • 52 LED/ft


15,0 W/m • 4,6 W/ft

182 LED/m • 55 LED/ft


20,0 W/m • 6,1 W/ft


TW - 252 LED/m • 77 LED/ft Tunable White

20,0 W/m • 6,1 W/ft



20,0 × 16,3 mm
0,79 × 0,64 "

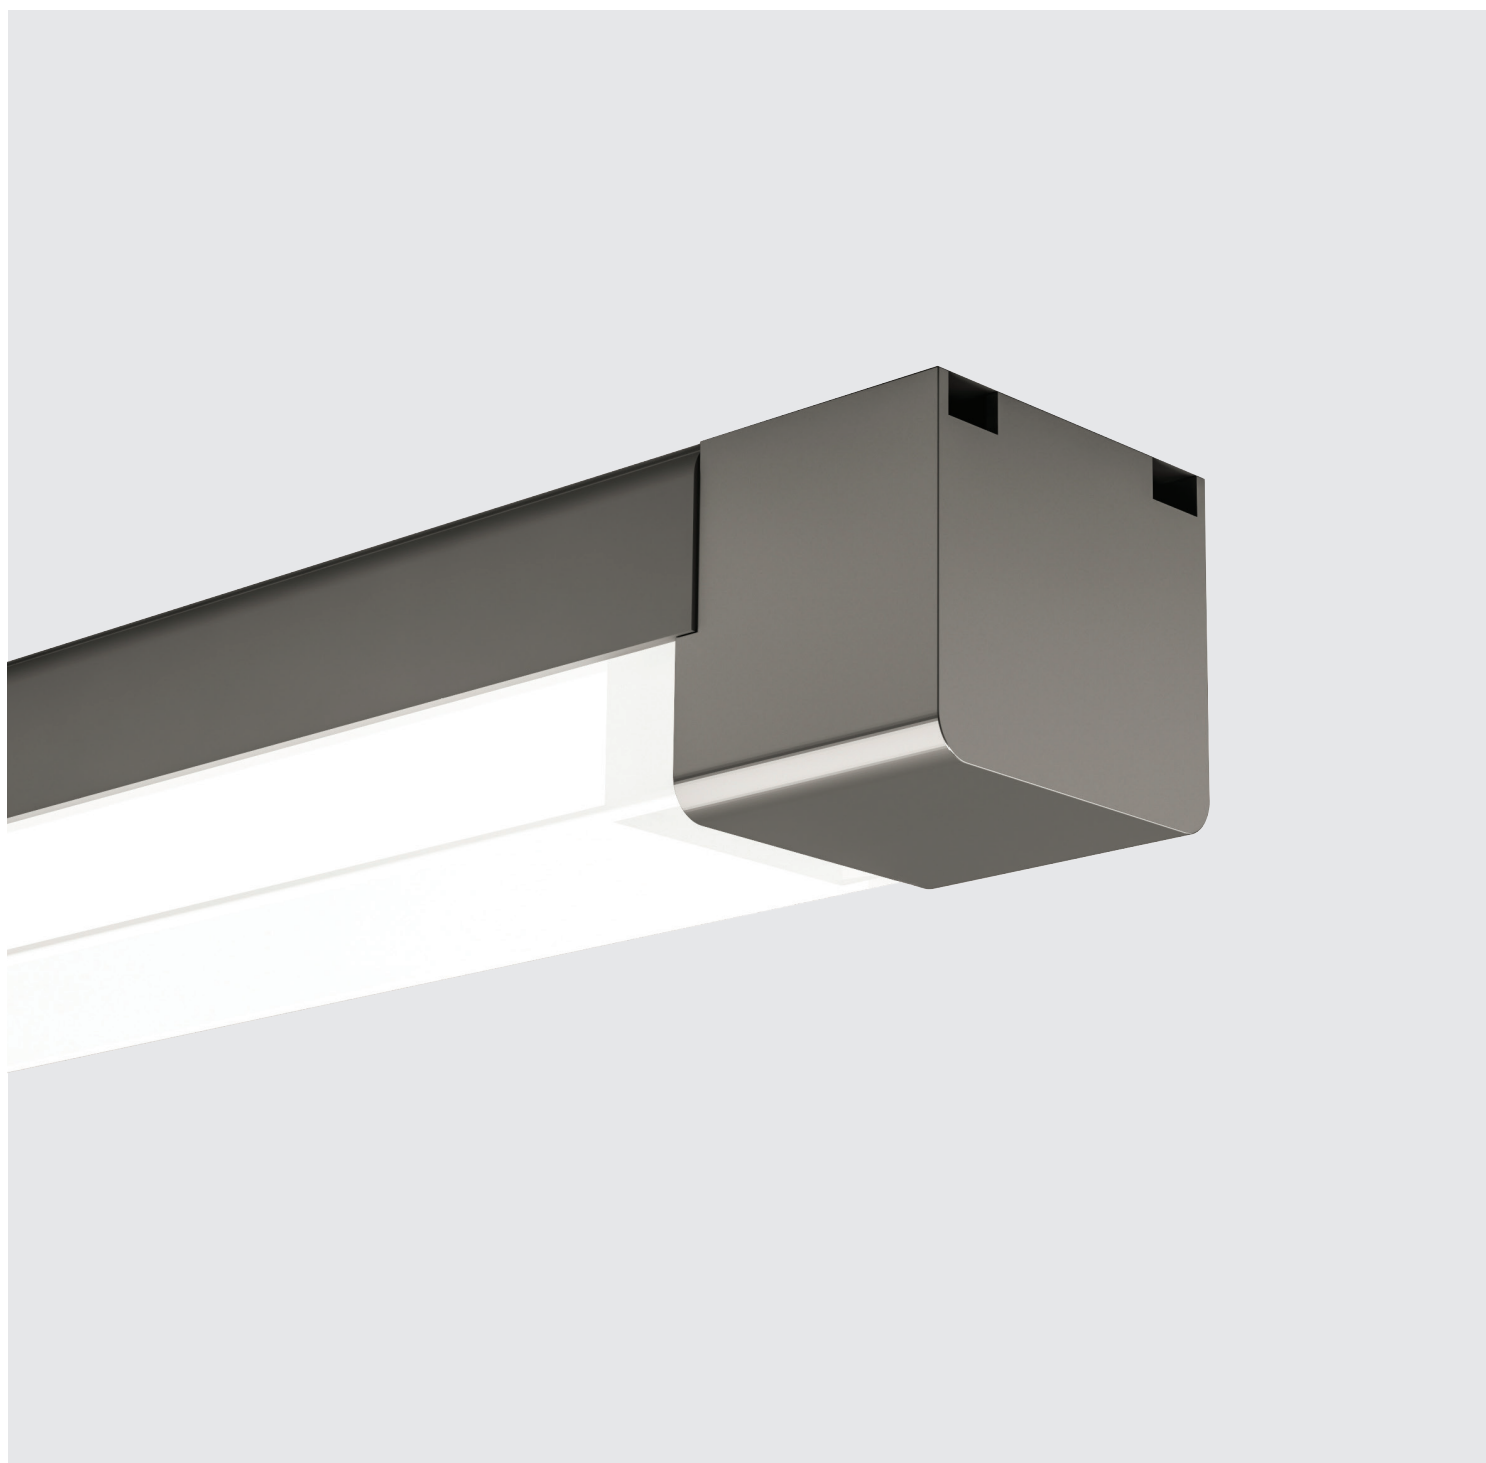

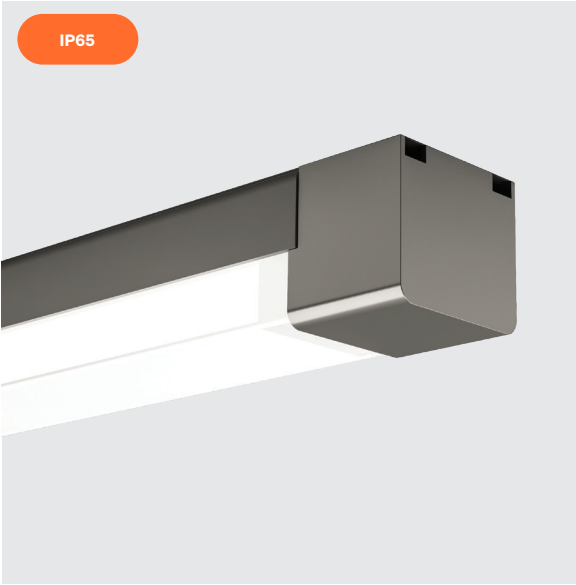

Vanish

Body Corpo		
Symmetrical linear profile Profilo lineare simmetrico		
Fastening Fissaggio	Heads with screws	Testatine con viti
Screen Schermo	Opal OP50 (Screening 50%)	Opale OP50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	2000 mm • 78,74 "	2000 mm
Finishing Finitura	Polish steel and opal white polycarbonate	Acciaio lucido e polycarbonato bianco opale
Listings and marks Certificazioni e marchi		
CE UK CA IP65 F III		
LED LED NICHIA		


Light Luce

Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 55 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
CCT K	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 2200 - 5700 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Luminous flux Flusso luminoso ● 3000 K	↓ OP50 – 52 lm/W 520 lm/m • 159 lm/ft	↓ OP50 – 56 lm/W 846 lm/m • 258 lm/ft	↓ OP50 – 65 lm/W 1312 lm/m • 400 lm/ft	↓ OP50 – 36 lm/W 720 lm/m • 220 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC

Nettuno


Dimensions Dimensioni Scale/Scala 1:1

TE Heads with screws
Testatine con viti

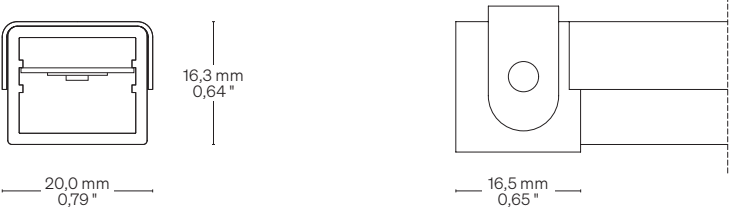

Fastening options Opzioni di fissaggio

TE Heads with screws
Testatine con viti

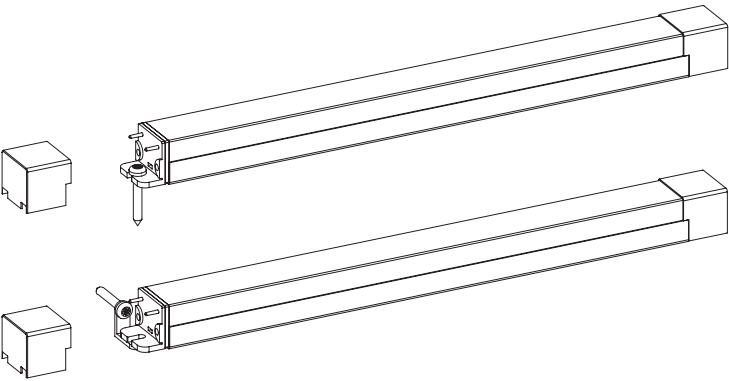




Order code Codice ordine

Basic codes Codici base	NESF144 Nettuno 144 LED/m • 44 LED/ft 10,0 W/m • 3,1 W/ft NESF168 Nettuno 168 LED/m • 52 LED/ft 15,0 W/m • 4,6 W/ft NESF182 Nettuno 182 LED/m • 55 LED/ft 20,0 W/m • 6,1 W/ft NESF252 Nettuno TW 252 LED/m • 77 LED/ft • 2200 - 5700 K 20,0 W/m • 6,1 W/ft
CCT K CCT K	WW18 1800 K WW20 2000 K WW22 2200 K WW25 2500 K WW27 2700 K WW30 3000 K NW35 3500 K NW 4000 K CW 5000 K
Fastening options Opzioni di fissaggio	TE Heads with screws Testatine con viti
Screens Schermi	OP50 Opal/Opale 50
Custom size Lunghezza ordinabile	-- Specify the size Specificare la misura

Order example Esempio ordine	NESF144 WW18 TE OP50 • 0,32 Nettuno, 144 LED/m • 44 LED/ft 10,0 W/m • 3,1 W/ft, Warm White 1800, Heads with screws, Opal 50 screen • 0,32 m Nettuno, 144 LED/m, 10,0 W/m, Warm White 1800, Testatine con viti, Schermo opale 50 • 0,32 m
--	---

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

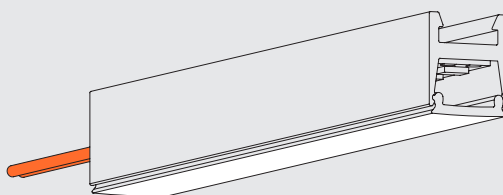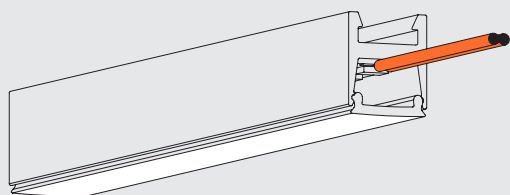

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperatura e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.