


# Rino Round

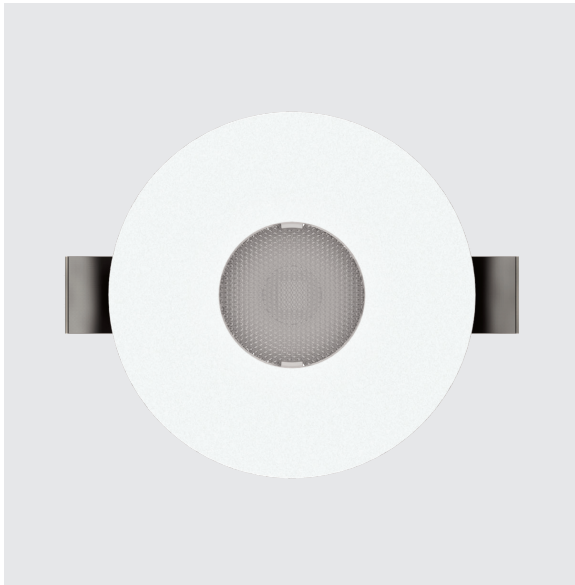

## Body Corpo

### Aluminium spotlight recessed for plasterboard

Faretto in alluminio da incasso per cartongesso

<b>Fastening</b> Fissaggio	Pressure	A pressione
<b>Optics</b> Ottica	16° • 18° • 30° • 47°	16° • 18° • 30° • 47°
<b>Wiring set</b> Cavo alimentazione	140 mm • 5,51"	140 mm
<b>Finishing</b> Finitura	<ul style="list-style-type: none"> <li>● Chrome galvanized</li> <li>● Argent varnish</li> <li>○ White varnish</li> </ul>	<ul style="list-style-type: none"> <li>● Galvanica cromo</li> <li>● Vernice argento</li> <li>○ Vernice bianca</li> </ul>

### Listings and marks

Certificazioni e marchi



### LED

LED




## Light Luce

<b>Light source</b> Sorgente luminosa	LED ↓ <b>Series/In serie</b> V CC: 1,0 W @ 350mA V CC: 1,5 W @ 500mA	LED ↓ <b>Parallel/In parallelo</b> V DC: 1,2 W V DC: 1,7 W
<b>CCT K</b>	<ul style="list-style-type: none"> <li>● 2700 K</li> <li>● 3000 K</li> <li>● 3500 K</li> <li>● 4000 K</li> <li>● 5000 K</li> </ul>	<ul style="list-style-type: none"> <li>● 2700 K</li> <li>● 3000 K</li> <li>● 3500 K</li> <li>● 4000 K</li> <li>● 5000 K</li> </ul>
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
<b>Luminous flux</b> Flusso luminoso ● 3000 K	101 lm @ 350mA 139 lm @ 500mA	101 lm @ 12 V DC 139 lm @ 12 V DC
<b>Input voltage/current</b> Tensione/Corrente di ingresso	3 V CC @ 350mA	12 V DC

**Dimensions** Dimensioni

Scale/Scala 1:1

**P** Pressure  
A pressione

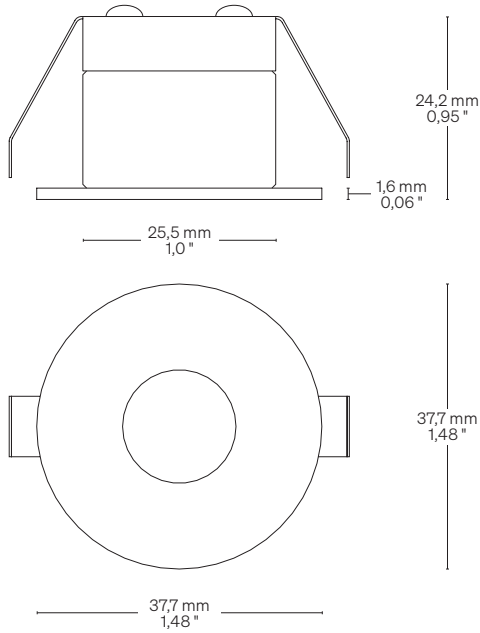

**Fastening options** Opzioni di fissaggio

**P** Pressure A pressione  Hole size: Ø 32,0 mm • Ø 1,26 " Dimensione foro: Ø 32,0 mm

**Order code** Codice ordine

**Basic code**  
Codice base

- **R11** Rino Round White/Bianco
- **R13** Rino Round Chrome/Cromo
- **R16** Rino Round Argent/Argento

**CCT K**  
CCT K

- **WW27** 2700 K
- **WW30** 3000 K
- **NW35** 3500 K
- **NW** 4000 K
- **CW** 5000 K

**Optics**  
Ottica

- **16** 16°
- **18** 18°
- **30** 30°
- **47** 47°

**Accessories**  
Accessori

- **DRPWM** Converter 12 V DC / Convertitore 12 V DC
- **DRDC** Converter 12 V DC - Potential different dimmer / Convertitore 12 V DC - Dimmerabile in tensione

**Order example**  
Esempio ordine

- **R11 WW27 16 DRPWM**  
Rino Round - White varnish, Warm White 2700, 16° Optic, Converter 12 V DC  
Rino Round - Vernice bianca, Warm White 2700, Ottica 16°, Convertitore 12 V DC