

**144 LED/m • 44 LED/ft**

10,0 W/m • 3,1 W/ft

**168 LED/m • 52 LED/ft**


15,0 W/m • 4,6 W/ft

**182 LED/m • 55 LED/ft**


20,0 W/m • 6,1 W/ft


**TW - 252 LED/m • 77 LED/ft Tunable White**

20,0 W/m • 6,1 W/ft



**20,0 × 16,3 mm**  
**0,79 × 0,64 "**

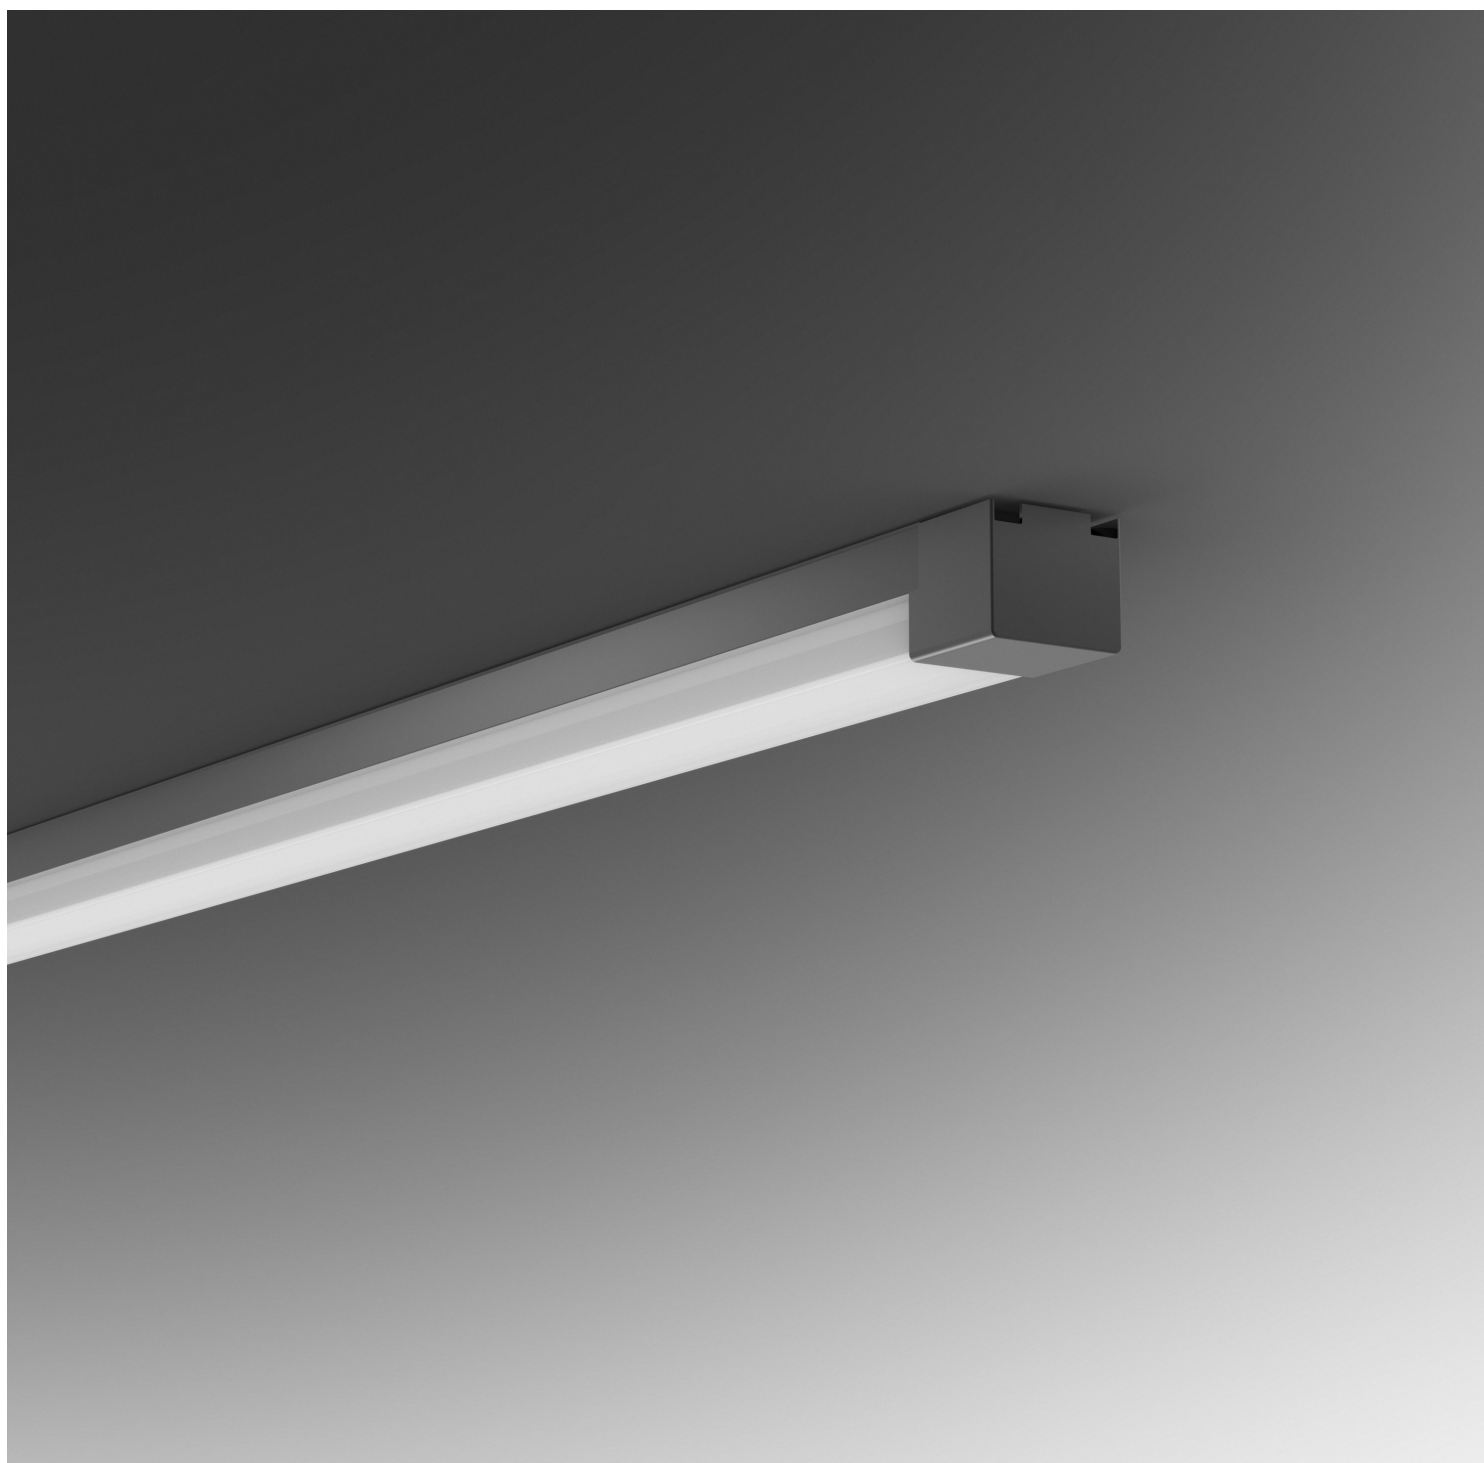

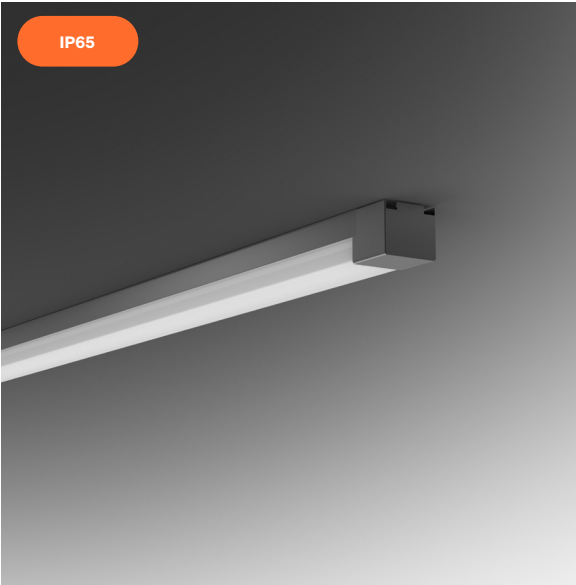

Vanish


|                                                          |                                                 |                                                   |
|----------------------------------------------------------|-------------------------------------------------|---------------------------------------------------|
| Body Corpo                                               |                                                 |                                                   |
| Symmetrical linear profile<br>Profilo lineare simmetrico |                                                 |                                                   |
| Fastening<br>Fissaggio                                   | Heads with screws                               | Testatine con viti                                |
| Screen<br>Schermo                                        | Opal 50<br>(Screening 50%)                      | Opale 50<br>(Scherm. 50%)                         |
| Wiring set<br>Cavo alimentazione                         | 2000 mm • 78,74 "                               | 2000 mm                                           |
| Custom size<br>Lunghezza ordinabile                      | 2000 mm • 78,74 "                               | 2000 mm                                           |
| Finishing<br>Finitura                                    | Polish steel<br>and opal white<br>polycarbonate | Acciaio lucido e<br>polycarbonato<br>bianco opale |
| Listings and marks<br>Certificazioni e marchi            |                                                 |                                                   |
| LED<br>LED                                               |                                                 |                                                   |
| CE UK CA IP65 F III NICHIA                               |                                                 |                                                   |

Light Luce

|                                                            |                                                                      |                                                                      |                                                                      |                                             |
|------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------|
| Light source<br>Sorgente luminosa                          | 144 LED/m • 44 LED/ft                                                | 168 LED/m • 52 LED/ft                                                | 182 LED/m • 55 LED/ft                                                | TW - 252 LED/m • 77 LED/ft<br>Tunable White |
| Power consumption<br>Consumo energia                       | 10,0 W/m • 3,1 W/ft                                                  | 15,0 W/m • 4,6 W/ft                                                  | 20,0 W/m • 6,1 W/ft                                                  | 20,0 W/m • 6,1 W/ft                         |
| CCT K                                                      | ● 1800 ● 2500 ● 3500<br>● 2000 ● 2700 ● 4000<br>● 2200 ● 3000 ● 5000 | ● 1800 ● 2500 ● 3500<br>● 2000 ● 2700 ● 4000<br>● 2200 ● 3000 ● 5000 | ● 1800 ● 2500 ● 3500<br>● 2000 ● 2700 ● 4000<br>● 2200 ● 3000 ● 5000 | ● 2200 - 5700 K                             |
| CRI<br>R9<br>Rf @ 3000 K<br>Rg @ 3000 K<br>MacAdam ellipse | Min 90<br>Min 50<br>92<br>100<br>3                                   | Min 90<br>Min 50<br>92<br>100<br>3                                   | Min 90<br>Min 50<br>92<br>100<br>3                                   | Min 90<br>Min 50<br>92<br>100<br>3          |
| Luminous flux<br>Flusso luminoso<br>● 3000 K               | ↓ O5 – 52 lm/W<br>520 lm/m • 159 lm/ft                               | ↓ O5 – 56 lm/W<br>846 lm/m • 258 lm/ft                               | ↓ O5 – 65 lm/W<br>1312 lm/m • 400 lm/ft                              | ↓ O5 – 36 lm/W<br>720 lm/m • 220 lm/ft      |
| Input voltage<br>Tensione di ingresso                      | 24 V DC                                                              | 24 V DC                                                              | 24 V DC                                                              | 24 V DC                                     |


DimensionsDimensioni
 Scale/Scala 1:1

TE
 Heads with screws  
 Testatine con viti

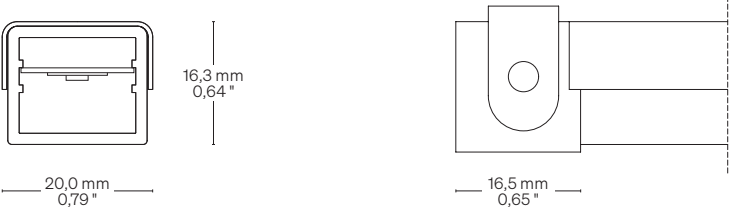

Fastening optionsOpzioni di fissaggio

TE
 Heads with screws  
 Testatine con viti


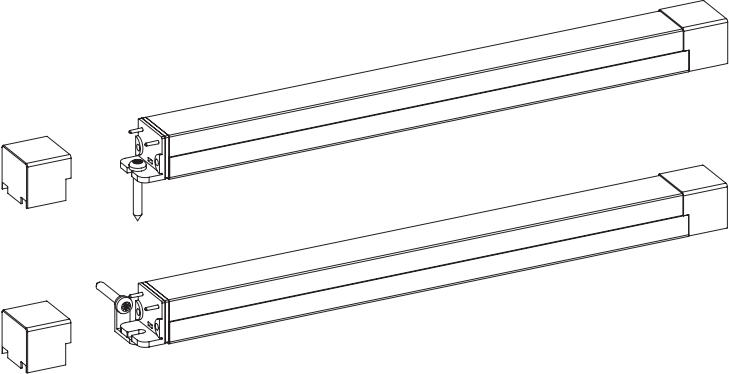


Order codeCodice ordine

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Basic codes</b><br>Codici base                | <ul style="list-style-type: none"> <li> <b>NE144</b>                     Nettuno<br/>                     144 LED/m • 44 LED/ft<br/>                     10,0 W/m • 3,1 W/ft                 </li> <li> <b>NE168</b>                     Nettuno<br/>                     168 LED/m • 52 LED/ft<br/>                     15,0 W/m • 4,6 W/ft                 </li> <li> <b>NE182</b>                     Nettuno<br/>                     182 LED/m • 55 LED/ft<br/>                     20,0 W/m • 6,1 W/ft                 </li> <li> <b>NE252</b>                     Nettuno<br/>                     TW 252 LED/m • 77 LED/ft<br/>                     2200 - 5700 K<br/>                     20,0 W/m • 6,1 W/ft                 </li> </ul> |
| <b>CCT K</b><br>CCT K                            | <ul style="list-style-type: none"> <li> <b>18</b>                     1800 K                 </li> <li> <b>20</b>                     2000 K                 </li> <li> <b>22</b>                     2200 K                 </li> <li> <b>25</b>                     2500 K                 </li> <li> <b>27</b>                     2700 K                 </li> <li> <b>30</b>                     3000 K                 </li> <li> <b>35</b>                     3500 K                 </li> <li> <b>40</b>                     4000 K                 </li> <li> <b>50</b>                     5000 K                 </li> </ul>                                                                                                           |
| <b>Fastening options</b><br>Opzioni di fissaggio | <ul style="list-style-type: none"> <li> <b>TE</b>                     Heads with screws<br/>                     Testatine con viti                 </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Screens</b><br>Schermi                        | <ul style="list-style-type: none"> <li> <b>O5</b>                     Opal/Opale 50                 </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Custom size</b><br>Lunghezza ordinabile       | <ul style="list-style-type: none"> <li> <b>--</b>                     Specify the size<br/>                     Specificare la misura                 </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Order example</b><br>Esempio ordine | <ul style="list-style-type: none"> <li> <b>NE144 18 TE O5 • 0,32</b><br/><br/>                     Nettuno, 144 LED/m • 44 LED/ft<br/>                     10,0 W/m • 3,1 W/ft, Warm White 1800,<br/>                     Heads with screws, Opal 50 screen • 0,32 m<br/><br/>                     Nettuno, 144 LED/m, 10,0 W/m,<br/>                     Warm White 1800, Testatine con viti,<br/>                     Schermo opale 50 • 0,32 m                 </li> </ul> |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Cable outlet Uscita cavi

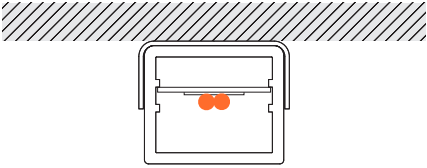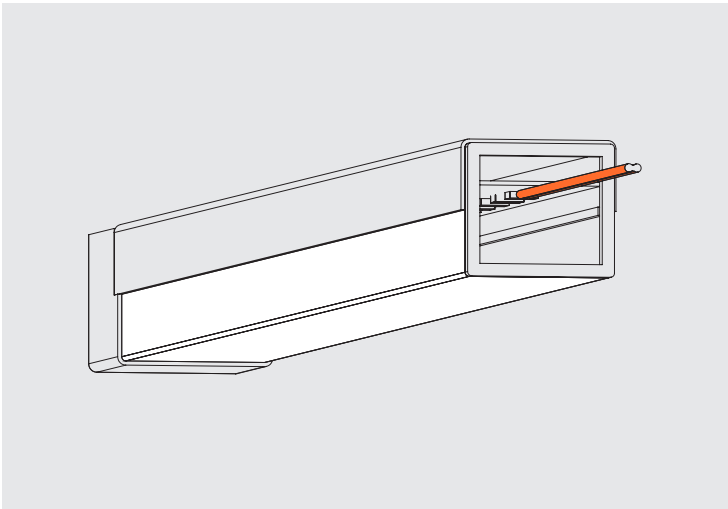

Scale/Scala 1:1

# Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.