

Oslo

144 LED/m • 44 LED/ft

10,0 W/m • 3,1 W/ft

168 LED/m • 52 LED/ft


15,0 W/m • 4,6 W/ft

182 LED/m • 56 LED/ft

20,0 W/m • 6,1 W/ft


TW - 252 LED/m • 77 LED/ft Tunable White

20,0 W/m • 6,1 W/ft



13,5 × 11,7 mm

0,53 × 0,46 "

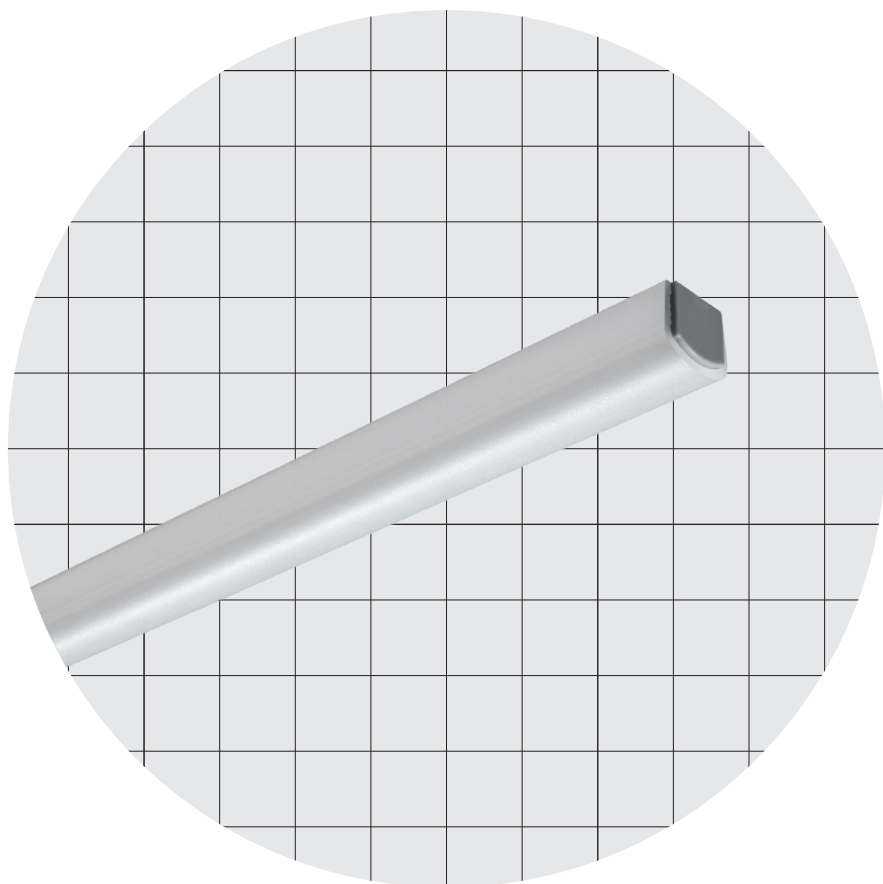




Vanish

Body Corpo		
Symmetrical linear profile Profilo lineare simmetrico		
Fastening Fissaggio	Caps + Plastic clips Caps + Magnets Heads with screws Caps + Adjustable system	Tappi + Clip in plastica Tappi + Magneti Testatine con viti Tappi + Sistema orientabile
Screen Schermo	Opal OP50 (Screening 50%)	Opale OP50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
Finishing Finitura	Satin polycarbonate	Policarbonato satinato
Listings and marks Certificazioni e marchi		
CEUKCAcULUS LISTEDEACIP20FIII		
LED LED		
NICHIA		

Light Luce				
Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2200 - 5700 K
Mixing on demand Miscelazione su richiesta				
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Luminous flux Flusso luminoso ● 3000 K	↓ OP50 – 71 lm/W 715 lm/m • 218 lm/ft	↓ OP50 – 77 lm/W 1165 lm/m • 355 lm/ft	↓ OP50 – 90 lm/W 1804 lm/m • 550 lm/ft	↓ OP50 – 49 lm/W 990 lm/m • 302 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC

Dimensions Dimensioni Scale/Scala 1:1

TA Caps + Plastic clips
Tappi + Clip in plastica

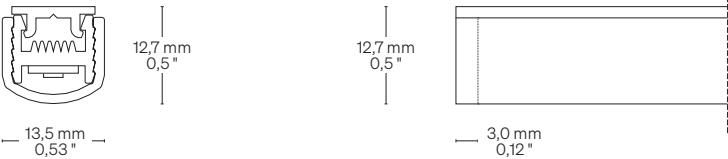

TAM Caps + Magnets
Tappi + Magneti




TE Heads with screws
Testatine con viti




Fastening options Opzioni di fissaggio


TA Caps + Plastic clips
Tappi + Clip in plastica

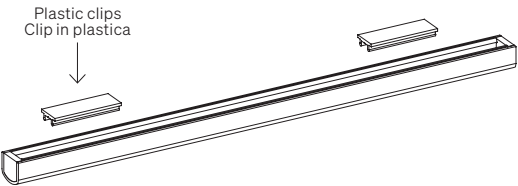

TAM Caps + Magnets
Tappi + Magneti

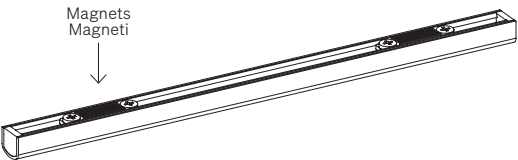

TE Heads with screws
Testatine con viti

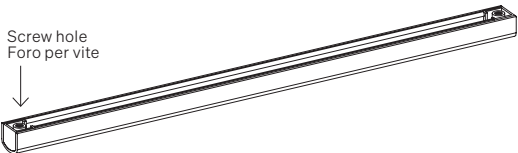

Order code Codice ordine

Basic codes Codici base	OSF144	Oslo 144 LED/m • 44 LED/ft 10,0 W/m • 3,1 W/ft
	OSF168	Oslo 168 LED/m • 52 LED/ft 15,0 W/m • 4,6 W/ft
	OSF182	Oslo 182 LED/m • 56 LED/ft 20,0 W/m • 6,1 W/ft
	OSF252	Oslo TW 252 LED/m • 77 LED/ft 2200 - 5700 K 20,0 W/m • 6,1 W/ft
CCT K CCT K	WW27	2700 K
	WW30	3000 K
	NW35	3500 K
	NW	4000 K
	CW	5000 K
Fastening options Opzioni di fissaggio	TA	Caps + Plastic clips Tappi + Clip in plastica
	TAM	Caps + Magnets Tappi + Magneti
	TE	Heads with screws Testatine con viti
	TCA	Caps + Adjustable system Tappi + Sist. orientabile
Screens Schermi	OP50	Opal/Opale 50
	--	Specify the size Specificare la misura
Custom size Lunghezza ordinabile	--	Specify the size Specificare la misura

Order example
Esempio ordine

OSF144 WW27 TA OP50 • 0,32



Oslo, 144 LED/m • 44 LED/ft
10,0 W/m • 3,1 W/ft, Warm White 2700,
Caps + Plastic clips, Opal 50 screen • 0,32 m

Oslo, 144 LED/m, 10,0 W/m,
Warm White 2700, Tappi + Clip in plastica,
Schermo opale 50 • 0,32 m

New fastening option Nuova opzione di fissaggio




TCA Caps + Adjustable system
Tappi + Sistema orientabile

Write to us for details: info@formulaluci.com
Scrivici per i dettagli: info@formulaluci.com

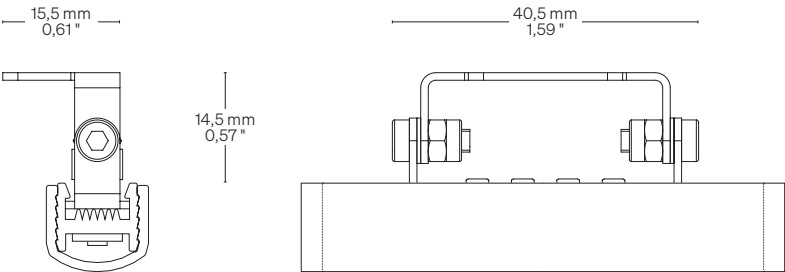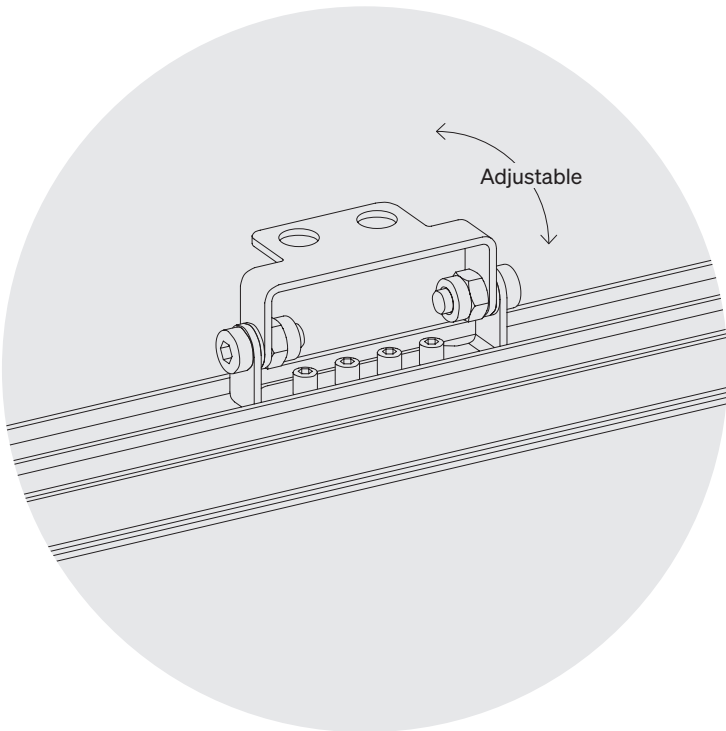

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

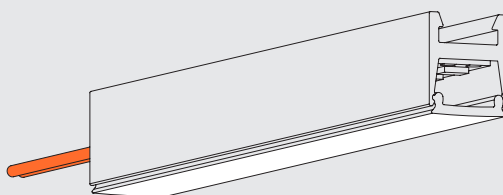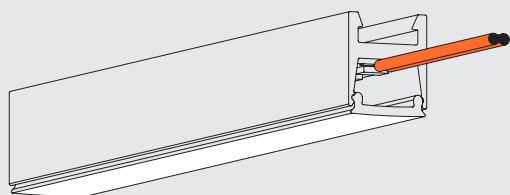

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperatura e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.