



Plank Optics P4

P4 → 26 LED/m • 8 LED/ft
Up to 26,0 W/m • 7,92 W/ft @ 350mA
Fino a 26,0 W/m @ 350mA

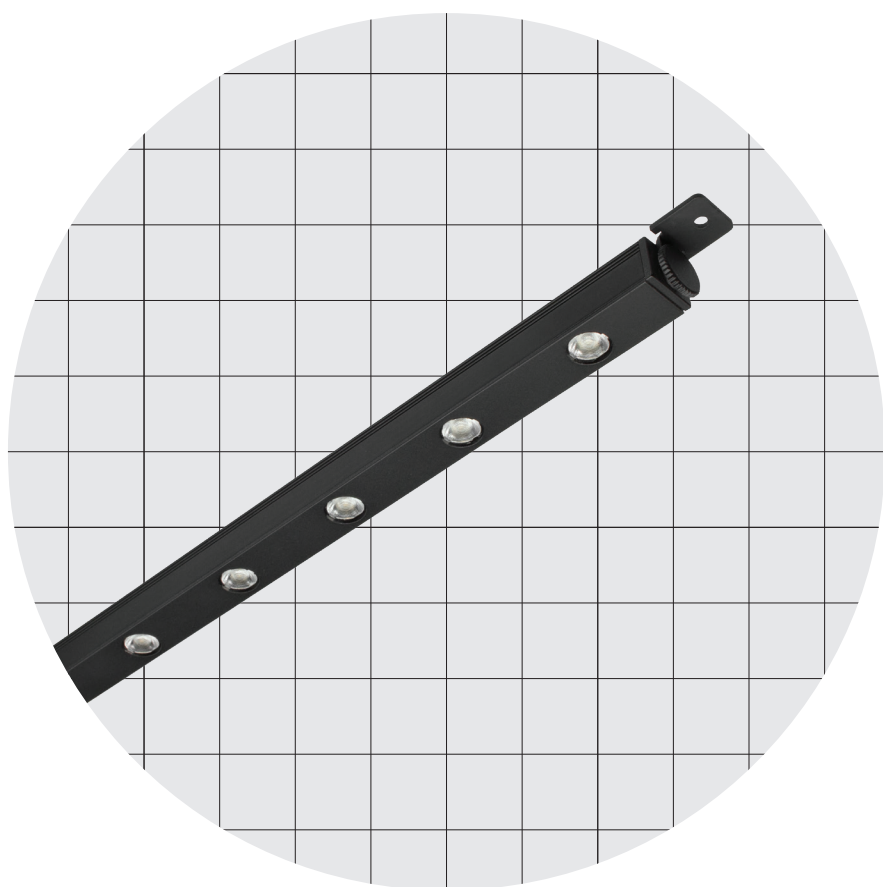

14,0 × 12,6 mm
0,55 × 0,50 "

Plank Optics P4



Spotted

Body Corpo

Spot fixed on adjustable symmetrical linear profile

Spot fissi su profilo lineare simmetrico orientabile

Fastening Fissaggio	Caps + Plastic clips Caps + Magnets Adjustable heads with screws Caps + Adjustable system	Tappi + Clip in plastica Tappi + Magnet Testatine orientabili con viti Tappi + Sistema orientabile
Optics Ottica	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 850 mm • 33,46 " (Caps or heads included) (Max 20 LED)	Fino a 850 mm (Tappi o testatine compresi) (Massimo 20 LED)
Finishing Finitura	● Black matt	● Nero opaco

Listings and marks

Certificazioni e marchi

LED

LED



Light Luce


Pitch Passo	↓ P4 38,5 mm • 1,52 "
Light source Sorgente luminosa	26 LED/m • 8 LED/ft
Power consumption Consumo energia	Up to 26,0 W/m • 7,92 W/ft @ 350mA Fino a 26,0 W/m @ 350mA
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta	
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 95 102 2
Luminous flux Flusso luminoso ● 3000 K	2626 @ 350mA 101 lm/W
Input current Corrente di ingresso	CC - Up to 400mA CC - Fino a 400mA

Plank Optics P4


Dimensions Dimensioni

Scale/Scala 1:1


TA Caps + Plastic clips
Tappi + Clip in plastica

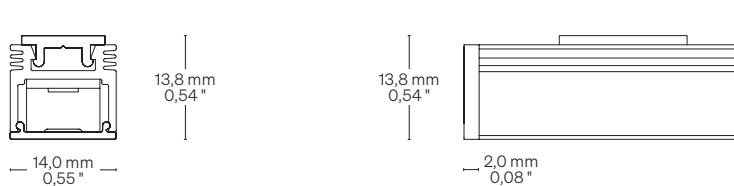

TAM Caps + Magnets
Tappi + Magneti

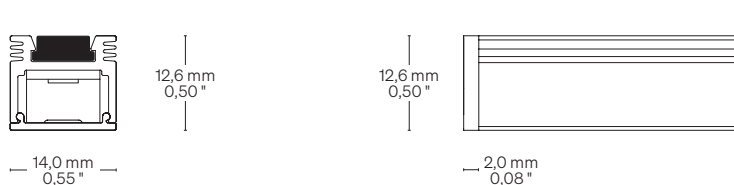


TO Adjustable heads with screws
Testatine orientabili con viti

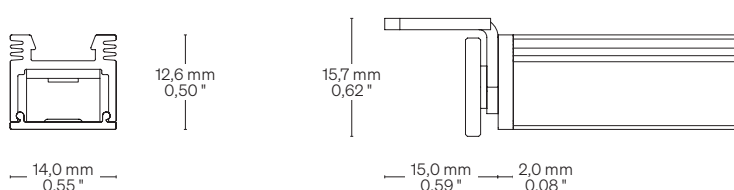


Fastening options Opzioni di fissaggio


TA Caps + Plastic clips
Tappi + Clip in plastica

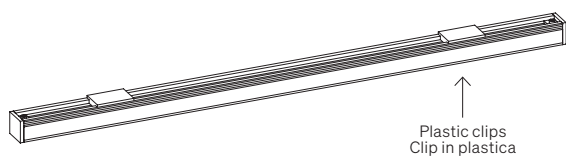


TAM Caps + Magnets
Tappi + Magneti

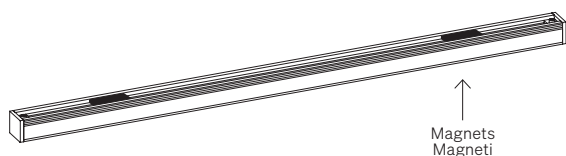

TO Adjustable heads with screws
Testatine orientabili con viti

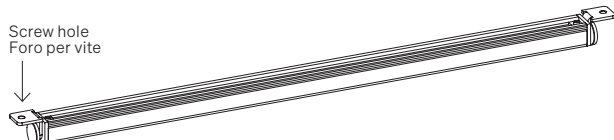

Accessory Louvers Accessorio Louvers

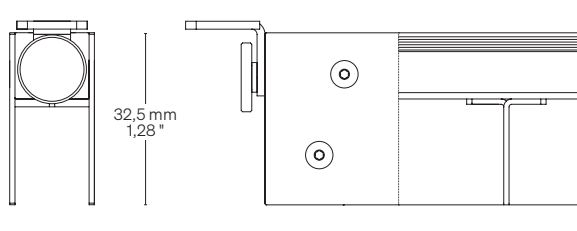



On request. Please contact us: sales@formulaluci.com
Su richiesta. Puoi contattarci: sales@formulaluci.com

Plank Optics P4

New fastening option Nuova opzione di fissaggio

TCA Caps + Adjustable system
Tappi + Sistema orientabile

Write to us for details: info@formulaluci.com
Scrivici per i dettagli: info@formulaluci.com


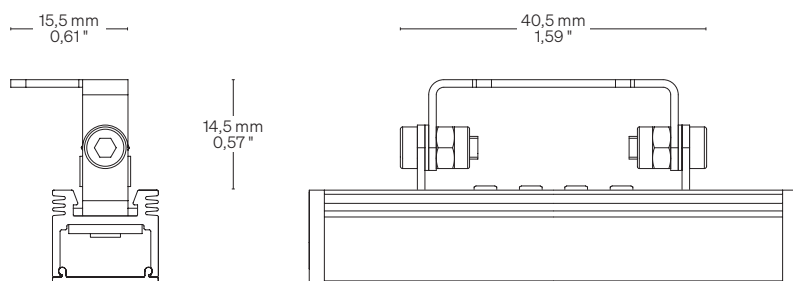
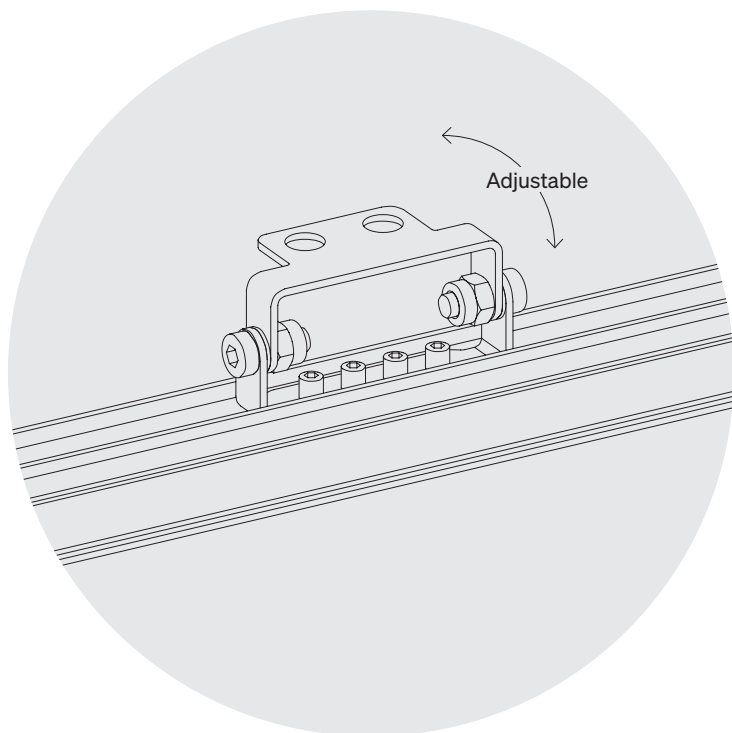


Plank Optics P4

Order code Codice ordine	
Basic code Codice base	<ul style="list-style-type: none"> • PK04 Plank Optics P4 26 LED/m • 8 LED/ft
CCT K CCT K	<ul style="list-style-type: none"> • WW27 ● 2700 K • WW30 ● 3000 K • NW35 ● 3500 K • NW ● 4000 K • CW ● 5000 K
Fastening options Opzioni di fissaggio	<ul style="list-style-type: none"> • TA Caps + Plastic clips Tappi + Clip in plastica • TAM Caps + Magnets Tappi + Magneti • TO Adjustable heads with screws Testatine orientabili con viti • TCA Caps + Adjustable system Tappi + Sist. orientabile
Optics Ottica	<ul style="list-style-type: none"> • 20 20° • 25 25° • 38 38° • 44 44° • 62 62° • OVAL Oval (45°+25°)
Accessories Accessori	<ul style="list-style-type: none"> • LV Louvers/Louvers
Custom size Lunghezza ordinabile	<ul style="list-style-type: none"> • -- Specify the size Specificare la misura
Order example Esempio ordine	<ul style="list-style-type: none"> • PK04 WW27 TA 20 LV • 0,32 Plank Optics P4, 26 LED/m • 8 LED/ft Warm White 2700, Caps + Plastic clips, 20° Optic, Louvers • 0,32 m Plank Optics P4, 26 LED/m, Warm White 2700, Tappi + Clip in plastica, Ottica 20°, Louvers • 0,32 m

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

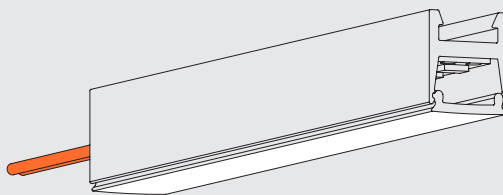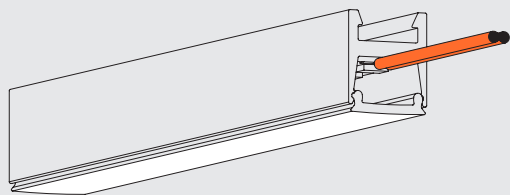

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.