

Plank Plus

↓ **Spotlight**



5 LED

4,0 W/Spot

↓ **Linear Light**

168 LED/m • 52 LED/ft

15,0 W/m • 4,6 W/ft

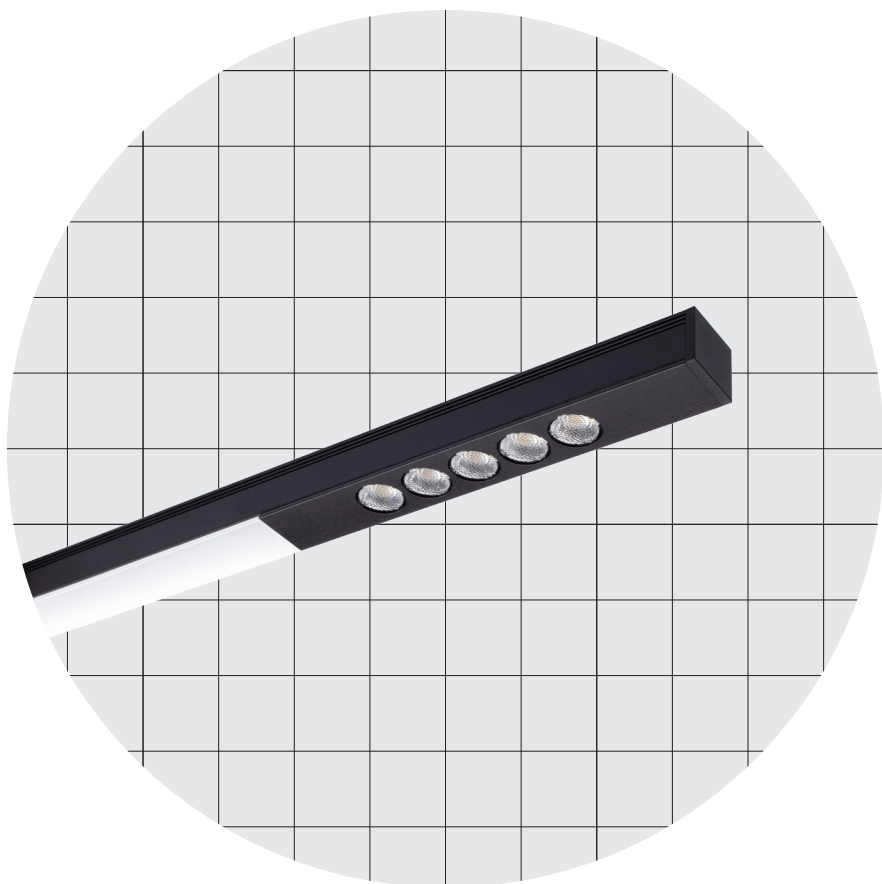

14,0 × 12,6 mm
0,55 × 0,50 "

Plank Plus



Body Corpo

Mixed light on symmetrical linear profile

Luce mista su profilo lineare simmetrico

Fastening Fissaggio	Caps + Plastic clips Caps + Magnets Adjustable heads with screws	Tappi + Clip in plastica Tappi + Magneti Testatine orientabili con viti
Optics Ottica	20° • 25° • 38° • 44° • 62° • OVAL (45°+25°)	20° • 25° • 38° • 44° • 62° • OVAL (45°+25°)
Accessories Accessori	Eyelid	Palpebra
Screen Schermo	Transparent TR5 (Screening 5%) Opal OP20 (Screening 20%) Opal OP40 (Screening 40%)	Trasparente TR5 (Schermatura 5%) Opale OP20 (Scherm. 20%) Opale OP40 (Scherm. 40%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
Finishing Finitura	● Black anodized ● Grey anodized	● Anodica nera ● Anodica grigia

Listings and marks

Certificazioni e marchi

LED

LED



Light Luce


Type Tipologia	↓ Spotlight	↓ Linear Light
Light source Sorgente luminosa	5 LED	168 LED/m • 52 LED/ft
Power consumption Consumo energia	4,0 W / Spot	15,0 W/m • 4,6 W/ft
CCT K Mixing on demand (Linear light only) Miscelazione su richiesta (Solo linear light)	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 95 102 2	Min 90 Min 50 95 102 3
Luminous flux Flusso luminoso ● 3000 K	270 lm / Spot	95 lm/W 1420 lm/m • 433 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC

Plank Plus


Dimensions Dimensioni

Scale/Scala 1:1


TA Caps + Plastic clips
Tappi + Clip in plastica

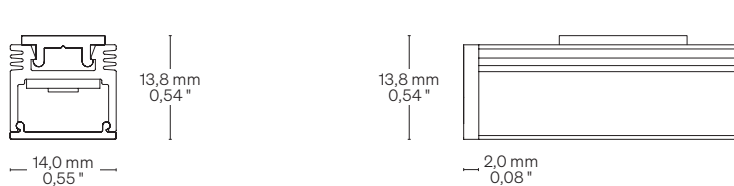

TAM Caps + Magnets
Tappi + Magneti

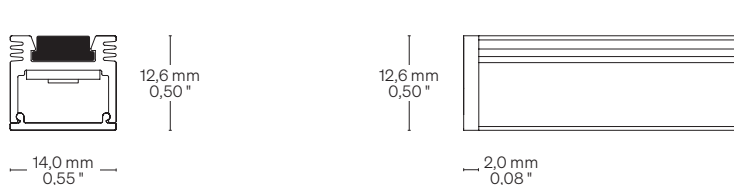


TO Adjustable heads with screws
Testatine orientabili con viti

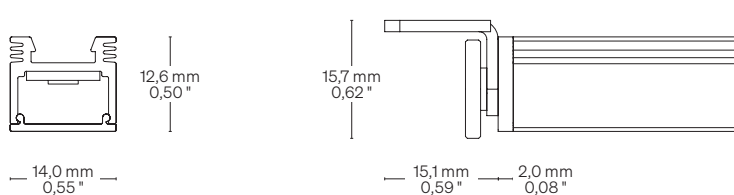


Fastening options Opzioni di fissaggio


TA Caps + Plastic clips
Tappi + Clip in plastica

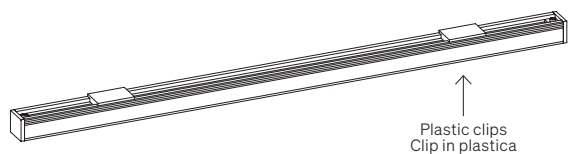

TAM Caps + Magnets
Tappi + Magneti

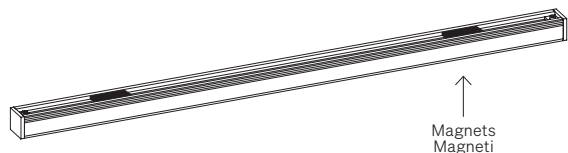

TO Adjustable heads with screws
Testatine orientabili con viti

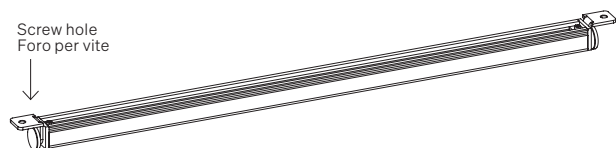



Order code Codice ordine

On request. Please contact us: sales@formulaluci.com
Su richiesta. Puoi contattarci: sales@formulaluci.com

Plank Plus



Accessory Eyelid
Accessorio Palpebra

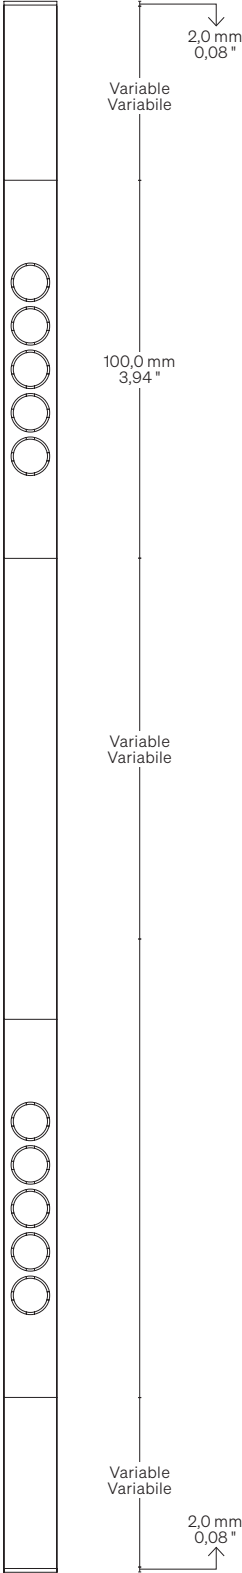
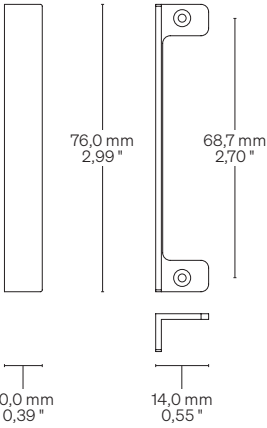


Plank Plus

Accessories Accessori




TCA Caps + Adjustable system
Tappi + Sistema orientabile

Write to us for details: info@formulaluci.com
Scrivici per i dettagli: info@formulaluci.com

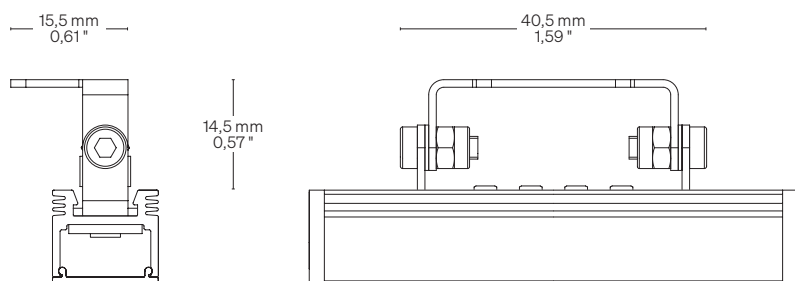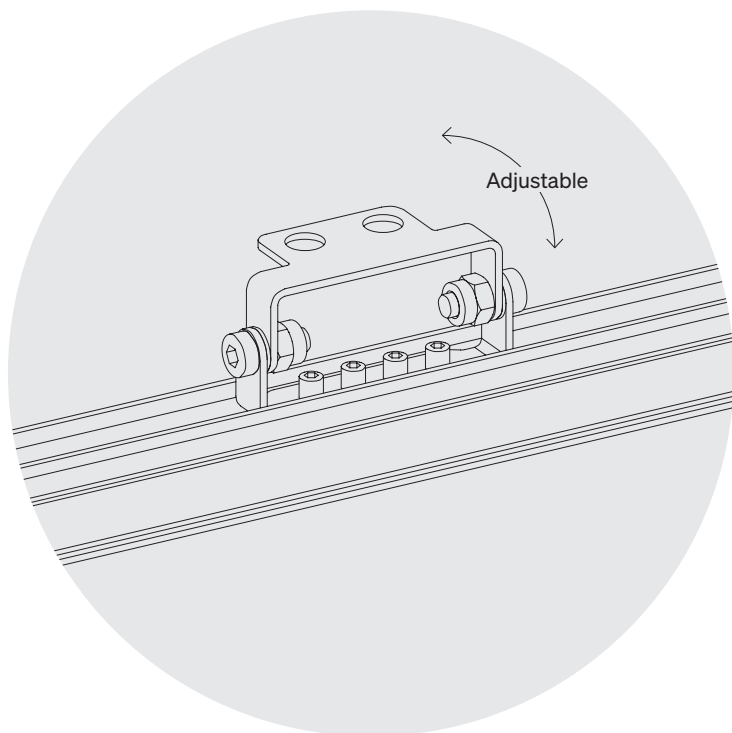

Cable outlet Uscita cavi

Right side same to left side Lato destro e sinistro uguali

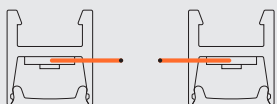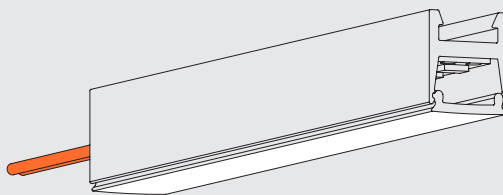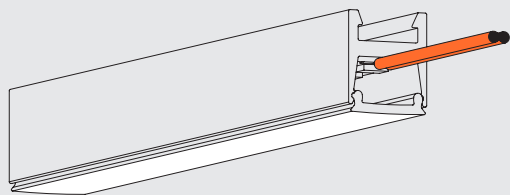

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.