

Play Magnets

Play Magnets

Play Small ⁰³ Play Medium ⁰⁴ Play Large ⁰⁵



Play Magnets

Prod. name Nome prod.	Product Prodotto	Size Dimensioni (mm • in)	Optics Ottica	Light source Sorg. lum.
Play Small		15,0 × 38,5 mm 0,59 × 1,52 " Ø 15,0 mm • 0,59 "	20° • 25° • 38° • 44° • 62°	1,1 W
Play Medium		29,0 × 59,0 mm 1,14 × 2,32 " Ø 29,0 mm • 1,14 "	16° • 18° • 30° • 47°	1,6 W
Play Large		36,0 × 74,0 mm 1,42 × 2,91 " Ø 36,0 mm • 1,42 "	14° • 20° • 32° • 52°	6,0 W

A black, minimalist desk lamp. It features a cylindrical shade mounted on a rectangular base. The base has a small, dark, curved detail on its side. The lamp is set against a plain, light gray background.

Spot orientabile con base magnetica per mini track

Fastening Fissaggio	With magnets on mini track	Con magneti su mini track
Optics Ottica	20° • 25° • 38° • 44° • 62°	20° • 25° • 38° • 44° • 62°
Finishing Finitura	● Black anodized	● Anodica nera

Certificazioni e marchi




LED



24 V DC

Scale/Scala 1:1

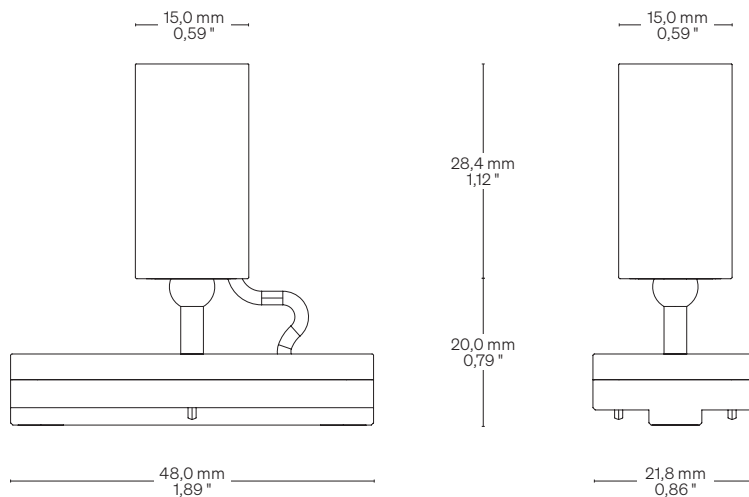

Play Medium



Body Corpo

Adjustable spot with magnetic base for mini track
Spot orientabile con base magnetica per mini track

Fastening Fissaggio	With magnets on mini track	Con magneti su mini track
Optics Ottica	16° • 18° • 30° • 47°	16° • 18° • 30° • 47°
Finishing Finitura	● Black anodized	● Anodica nera

Listings and marks
Certificazioni e marchi



LED
LED




Light Luce

Light source Sorgente luminosa	LED 1,6 W
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2
Luminous flux Flusso luminoso ● 3000 K	187 lm @ 500mA
Input voltage Tensione di ingresso	24 V DC

Dimensions Dimensioni

Scale/Scala 1:1

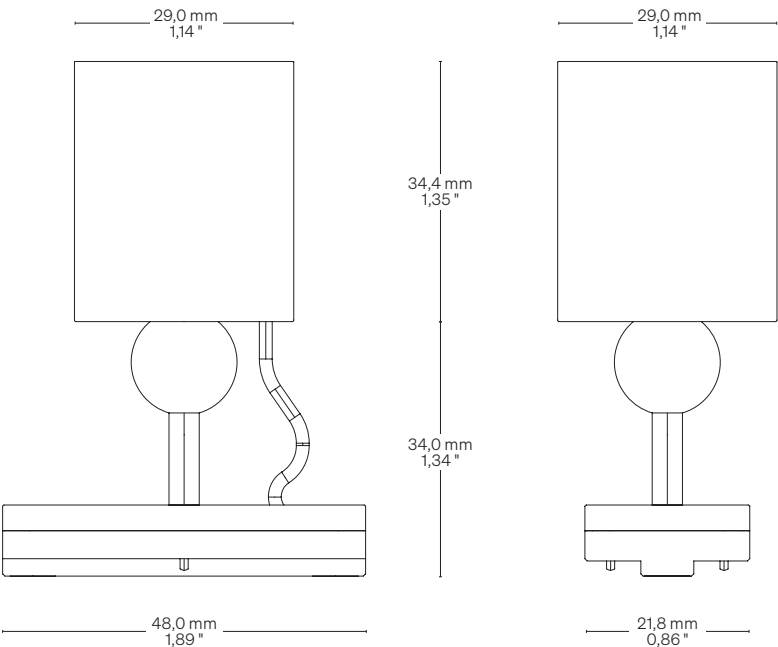

Play Large



Diffusing filter/
Filtro diffondente



Honeycomb

Body Corpo

Adjustable spot with magnetic base for mini track

Spot orientabile con base magnetica per mini track

Fastening Fissaggio	With magnets on mini track	Con magneti su mini track
Optics Ottica	14° • 20° • 32° • 52°	14° • 20° • 32° • 52°
Finishing Finitura	● Black anodized	● Anodica nera
Accessories Accessori	Diffusing filter Honeycomb	Filtro diffondente Honeycomb

Listings and marks

Certificazioni e marchi



LED
LED



Light Luce

Light source
Sorgente luminosa

LED 6,0 W

CCT K

● 2700 K
● 3000 K
● 3500 K
● 4000 K
● 5000 K

CRI
R9
Rf @ 3000 K
Rg @ 3000 K
MacAdam ellipse

Min 90
Min 80
92
100
2

Luminous flux
Flusso luminoso
● 3000 K


620 lm
@ 350mA

Input voltage
Tensione di ingresso

24 V DC


Dimensions Dimensioni

Scale/Scala 1:1

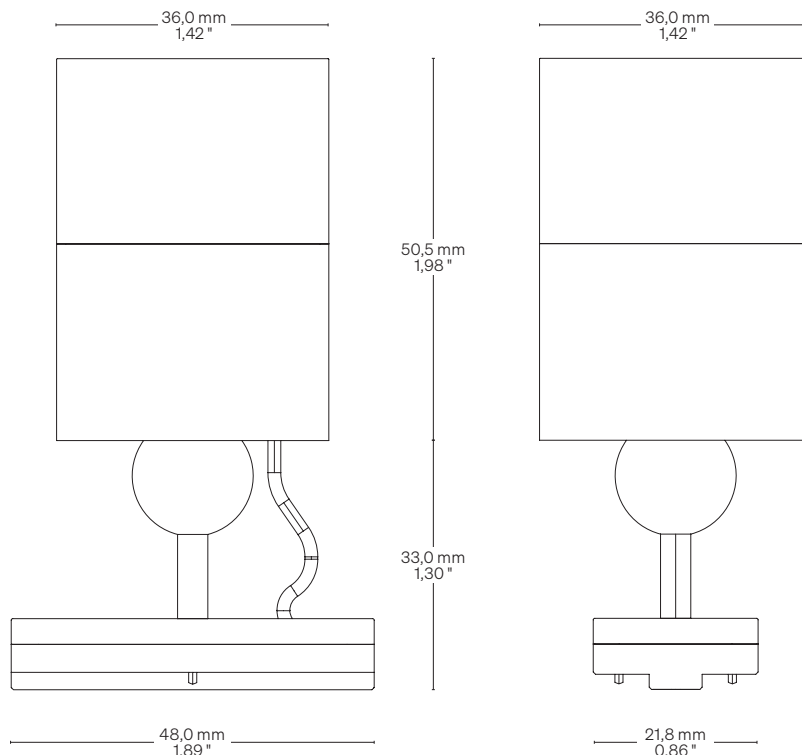


Play Magnets

Fastening options Opzioni di fissaggio

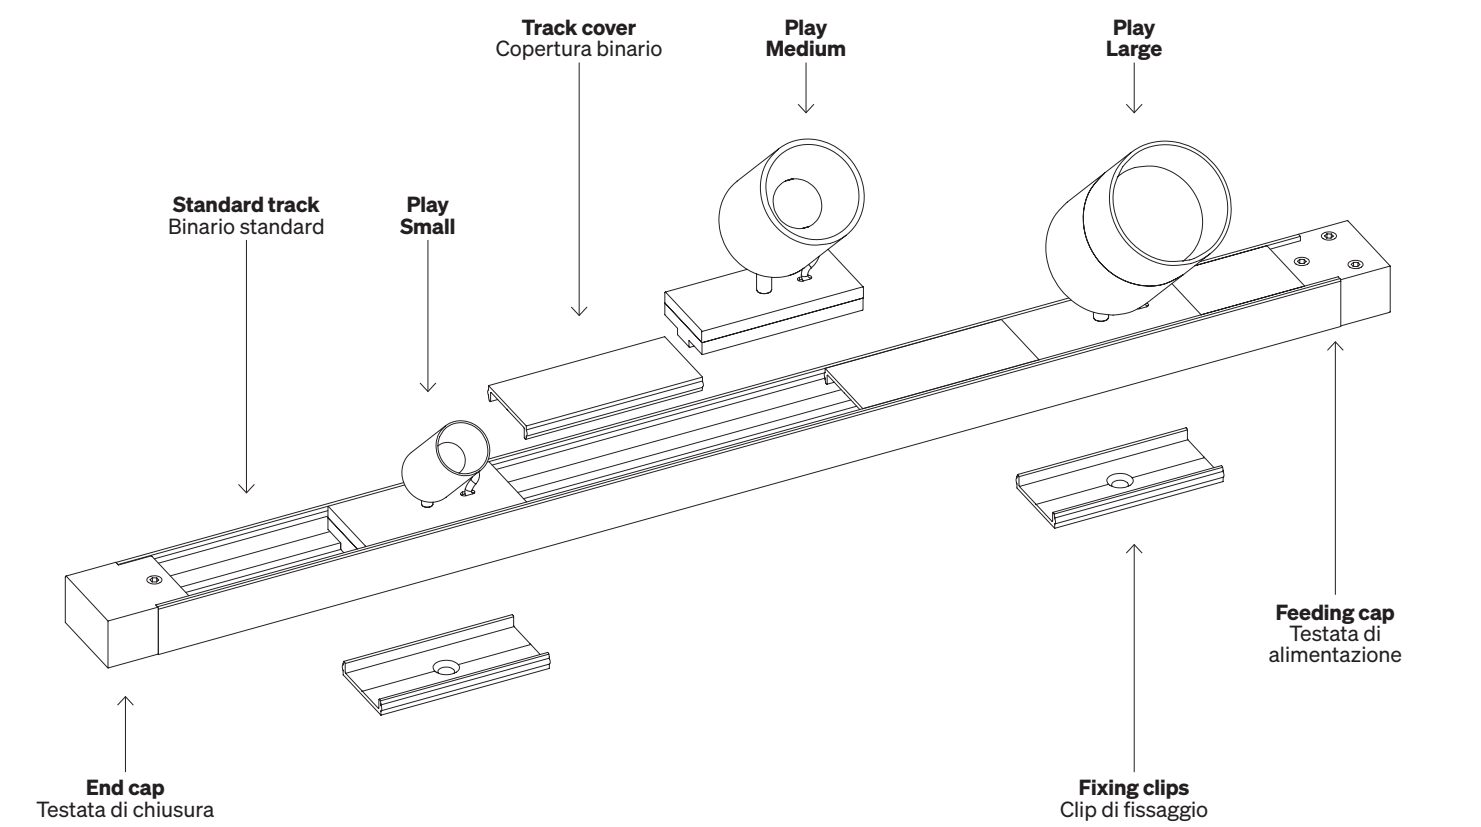

Standard track Binario standard


Scale/Scala 1:1

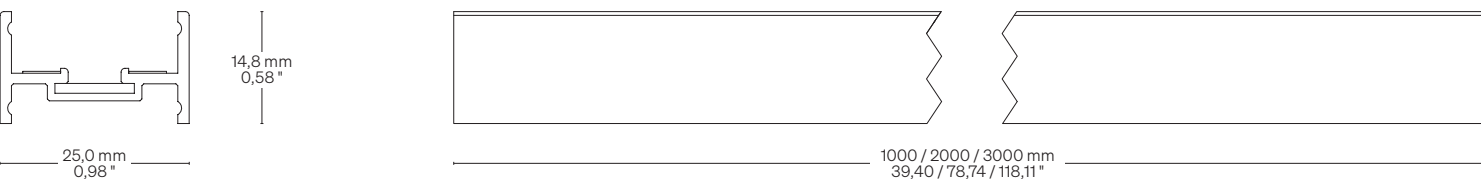

F Standard finishing: Black anodized
Finitura standard: Anodica nera

Component dimensions Dimensioni componenti

Scale/Scala 1:2

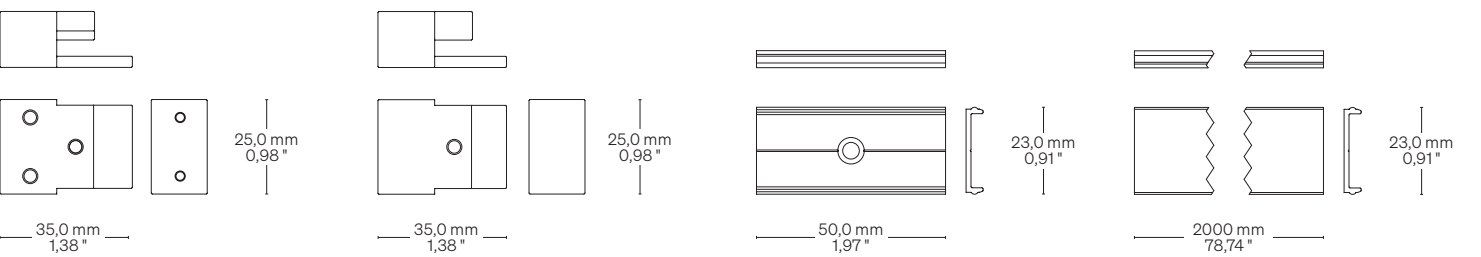

Feeding cap
Testata di alimentazione

End cap
Testata di chiusura

Fixing clips
Clip di fissaggio

Track cover
Copertura binario

F Standard finishing: Black anodized
Finitura standard: Anodica nera

Play Magnets

Order code Codice ordine		
Basic code Codice base	PTS	Play Small LED 1,1 W
CCT K CCT K	WW27 WW30 NW35 NW CW	2700 K 3000 K 3500 K 4000 K 5000 K
Optics Ottica	20 25 38 44 62	20° 25° 38° 44° 62°
Order example Esempio ordine	PTS WW27 20 Play Small, LED 1,1 W, Warm White 2700, 20° optic Play Small, LED 1,1 W, Warm White 2700, Ottica 20°	

Order code Codice ordine		
Basic code Codice base	PTM	Play Medium LED 1,6 W
CCT K CCT K	WW27 WW30 NW35 NW CW	2700 K 3000 K 3500 K 4000 K 5000 K
Optics Ottica	16 18 30 47	16° 18° 30° 47°
Order example Esempio ordine	PTM WW27 16 Play Medium, LED 1,6 W, Warm White 2700, 16° optic Play Medium, LED 1,6 W, Warm White 2700, Ottica 16°	

Order code Codice ordine		
Basic code Codice base	PTL	Play Large LED 6,0 W
CCT K CCT K	WW27 WW30 NW35 NW CW	2700 K 3000 K 3500 K 4000 K 5000 K
Optics Ottica	14 20 32 52	14° 20° 32° 52°
Accessories Accessori	DF HO	Diffusing filter/ Filtro diffondente Honeycomb
Order example Esempio ordine	PTL WW27 14 DF Play Large, LED 6,0 W, Warm White 2700, 14° optic, Diffusing filter Play Large, LED 6,0 W, Warm White 2700, Ottica 14°, Filtro diffondente	

Order code Codice ordine		
Components Componenti	TRKN01	Standard track 1000 mm • 39,40 " Binario standard 1000 mm
	TRKN02	Standard track 2000 mm • 78,74 " Binario standard 2000 mm
	TRKN03	Standard track 3000 mm • 118,11 " Binario standard 3000 mm
	TRKNFC	Feeding cap Testata di alimentazione
	TRKNEC	End cap Testata di chiusura
	TRKNCL	Fixing clips Clip di fissaggio
	TRKNCO	Track cover 2000 mm • 78,74 " Copertura binario 2000 mm

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.