

Play Recessed




Play Recessed



Diffusing filter



Honeycomb

Body Corpo		
Adjustable aluminum spot Spot in alluminio orientabile		
Optics Ottica	14° • 20° • 32° • 52°	14° • 20° • 32° • 52°
Wiring set Cavo alimentazione	1500 mm • 59,06 "	1500 mm
Finishing Finitura	● Black varnish → On request other finishes ● Vernice nera → Su richiesta altre finiture	
Listings and marks Certificazioni e marchi	     	
Where we produce Dove produciamo		
LED (See page CRI) LED (Vedi pagina CRI)	 	

Fastening options Opzioni di fissaggio

PRLT



Play Recessed Trim
Play Recessed Trim

PRLTRIMLESS-P



Play Recessed Plaster Trimless
Play Recessed con ghiera per cartongesso

PRLTRIMLESS-W



Play Recessed Wooden Trimless
Play Recessed con ghiera per legno

Play Recessed

Light Luce



Light source Sorgente luminosa	LED ↓ Series/In serie V CC: 6,0 W @ 500mA	LED ↓ Parallel/In parallelo V DC: 6,4 W @ 500mA	6,0 W - TW - Tunable White
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 - 5700 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 92 100 2	Min 90 Min 80 92 100 2	Min 90 Min 80 92 100 2
Delivered lumen output Flusso luminoso emesso ● 3000 K	510 lm @ 500mA	510 lm @ 500mA	250 lm @ 500mA - 2700 K 320 lm @ 500mA - 5000 K
Input voltage/current Tensione/Corrente di ingresso	12 V CC @ 500mA	24 V DC	12 V CC @ 500mA

Light Luce



Light source Sorgente luminosa	LED ↓ Series/In serie V CC: 4,0 W @ 350mA	LED ↓ Parallel/In parallelo V DC: 4,0 W @ 350mA
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 92 100 2	Min 90 Min 80 92 100 2
Delivered lumen output Flusso luminoso emesso ● 3000 K	TBD	TBD
Input voltage/current Tensione/Corrente di ingresso	12 V CC @ 350mA	24 V DC




Play Recessed

Dimensions Dimensioni

Scale/Scala 1:2

PRLT

Play Recessed Trim
Play Recessed Trim

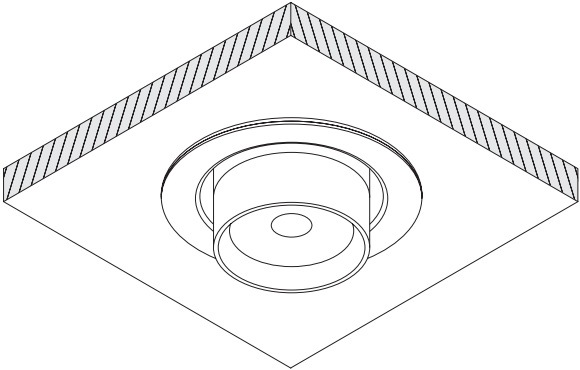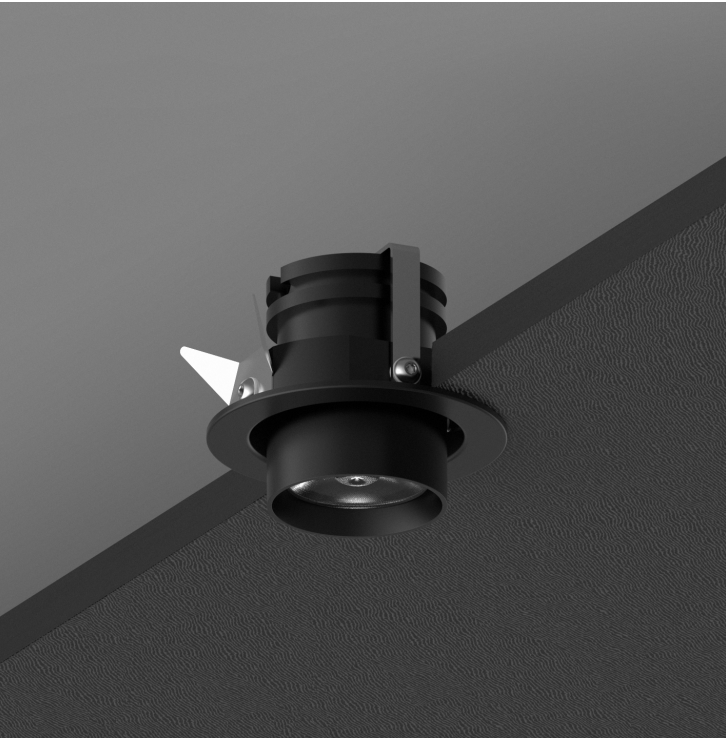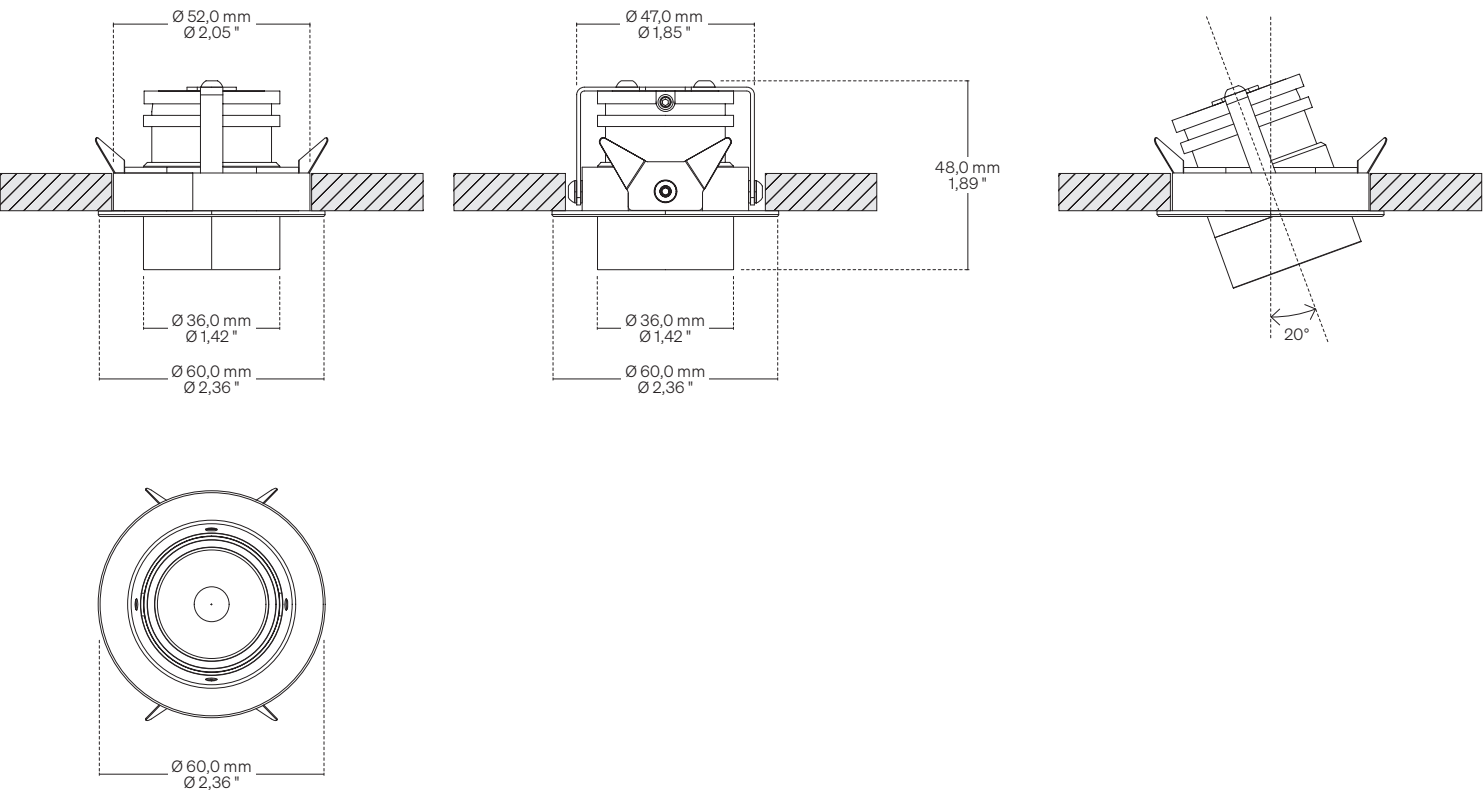

Hole size: $\varnothing 52,0 \text{ mm} \cdot \varnothing 2,05 \text{ ''}$
Dimensione foro: $\varnothing 52,0 \text{ mm}$





Play Recessed

Dimensions Dimensioni

Scale/Scala 1:2

PRLTRIMLESS-P

Play Recessed Plaster Trimless
Play Recessed con ghiera per cartongesso

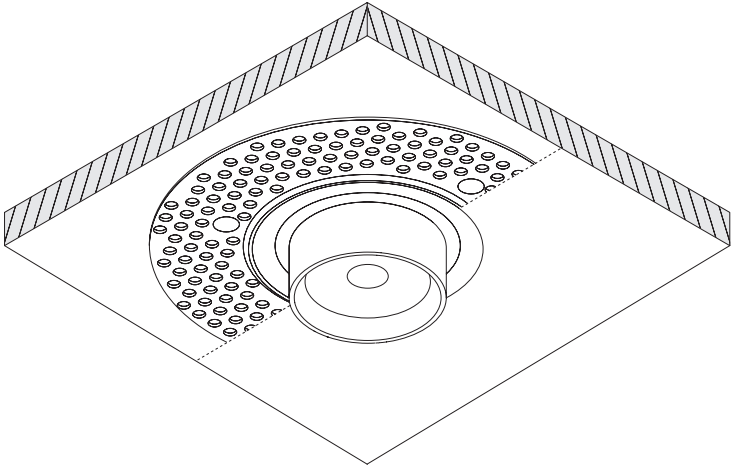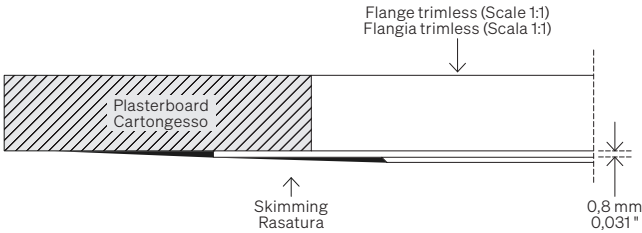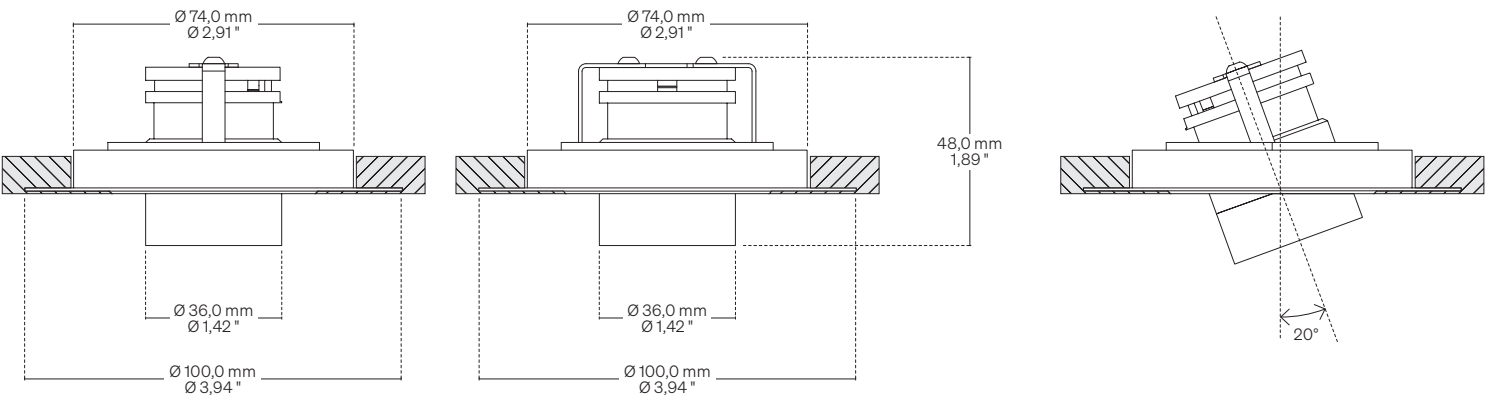

Hole size: $\varnothing 74,0 \text{ mm} \cdot \varnothing 2,91''$
Dimensione foro: $\varnothing 74,0 \text{ mm}$



Play Recessed

Dimensions Dimensioni

Scale/Scala 1:2

PRLTRIMLESS-W

Play Recessed Wooden Trimless
Play Recessed con ghiera per legno

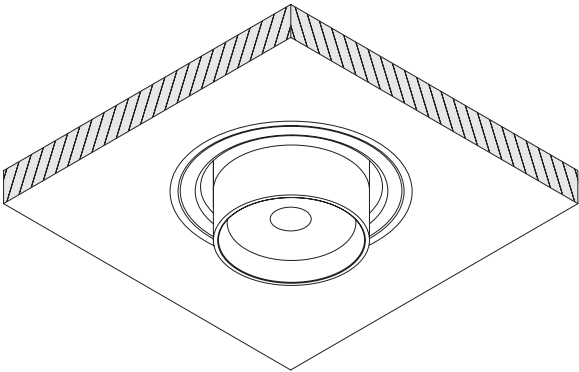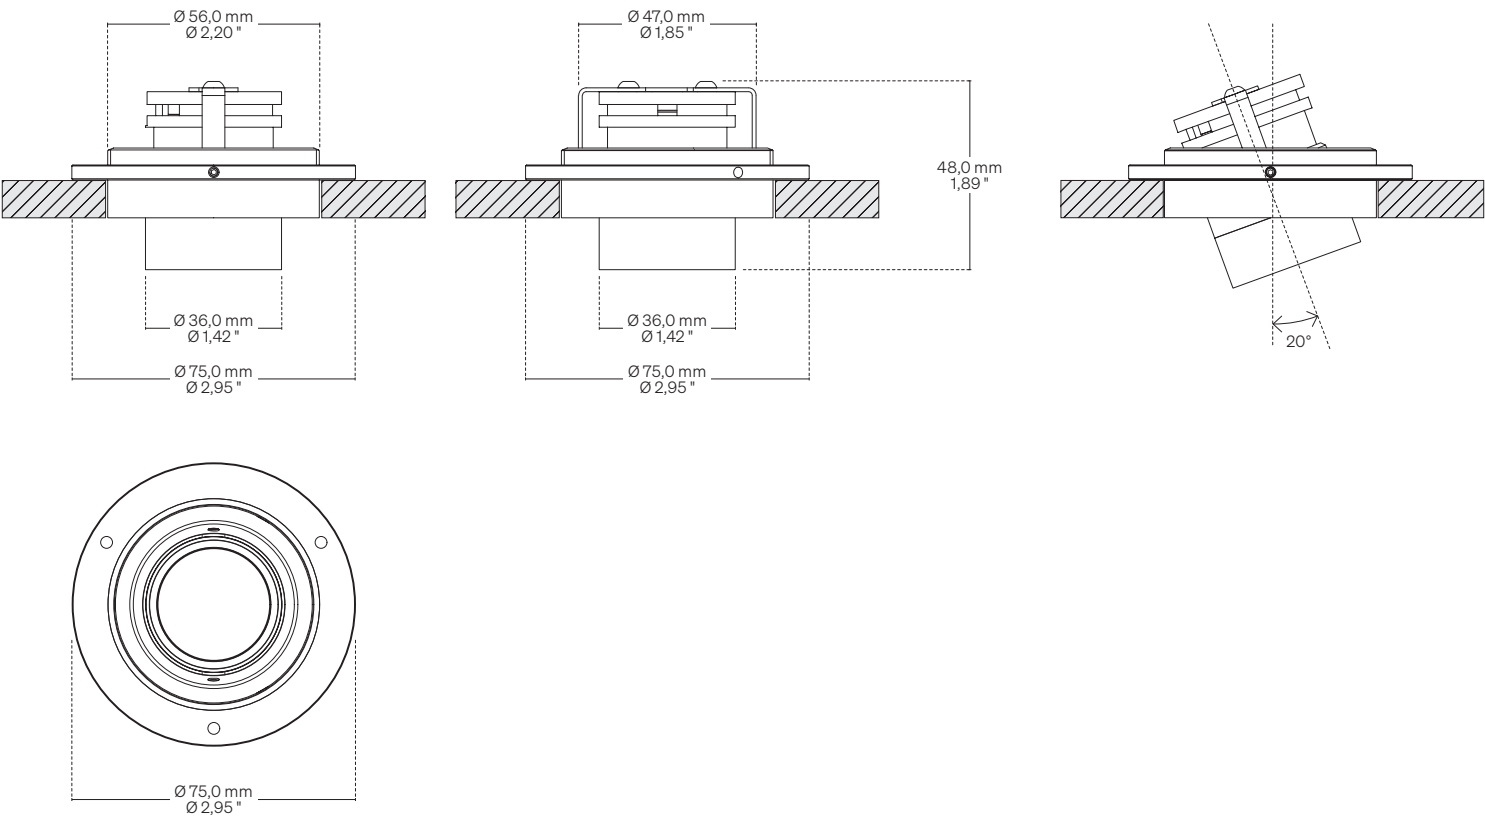

Hole size: $\varnothing 56,0 \text{ mm} \cdot \varnothing 2,20 \text{ ''}$
Dimensione foro: $\varnothing 56,0 \text{ mm}$

Play Recessed

Order code (CE Version) Codice ordine (Versione CE)

Basic code Codice base	PRLT PRLTRIMLESS	Play Recessed Trim Play Recessed Trimless
Light source Sorgente luminosa	C50 DC6	V CC: 6,0 W @ 500mA V DC: 6,4 W @ 500mA
CCT K CCT K	27 30 35 40 50 2757	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K ● 2700 - 5700 K
Optics Ottica	14 20 32 52	14° 20° 32° 52°
Finishing Finitura	10	● Black RAL9005 matt finish ● Vernice nera opaca RAL9005
Order example Esempio ordine	PRLT C50 27 14 10 Play Recessed Trim, V CC: 6,0 W @ 500mA, Warm White 2700, 14° Optics, Black RAL9005 Play Recessed Trim, V CC: 6,0 W @ 500mA, Warm White 2700, Ottica 14°, Black RAL9005	
Fastening options Opzioni di fissaggio	PRLTRIMLESS -P PRLTRIMLESS-W	Plaster Ring Nut Ghiera per cartongesso Wooden Ring Nut Ghiera per legno
Accessories (optionals) Accessori (opzionali)	DF HO	Diffusing filter/ Filtro diffondente Honeycomb
Accessories Accessori	DRPWM DRDC	Converter 24 V DC Convertitore 24 V DC Converter 24 V DC Potential different dimmer Convertitore 24 V DC Dimmerabile in tensione

Play Recessed

Order code (UL Version) Codice ordine (Versione UL)

Basic code Codice base	PRLT PRLTRIMLESS	Play Recessed Trim Play Recessed Trimless
Light source Sorgente luminosa	C35 DC4	V CC: 4,0 W @ 350mA V DC: 4,0 W @ 350mA
CCT K CCT K	27 30 35 40 50 2757	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K ● 2700 - 5700 K
Optics Ottica	14 20 32 52	14° 20° 32° 52°
Finishing Finitura	10	● Black RAL9005 matt finish ● Vernice nera opaca RAL9005
Order example Esempio ordine	PRLTC35 27 14 10 Play Recessed Trim, V CC: 4,0 W @ 350mA, Warm White 2700, 14° Optics, Black RAL9005 Play Recessed Trim, V CC: 4,0 W @ 350mA, Warm White 2700, Ottica 14°, Black RAL9005	
Fastening options Opzioni di fissaggio	PRLTRIMLESS-P PRLTRIMLESS-W	Plaster Ring Nut Ghiera per cartongesso Wooden Ring Nut Ghiera per legno
Accessories (optionals) Accessori (opzionali)	DF HO	Diffusing filter/ Filtro diffondente Honeycomb
Accessories Accessori	DRPWM DRDC	Converter 24 V DC Convertitore 24 V DC Converter 24 V DC Potential different dimmer Convertitore 24 V DC Dimmerabile in tensione

CRI Typical* CRI Tipici*




R9080 • 2 SDCM

Power LED

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

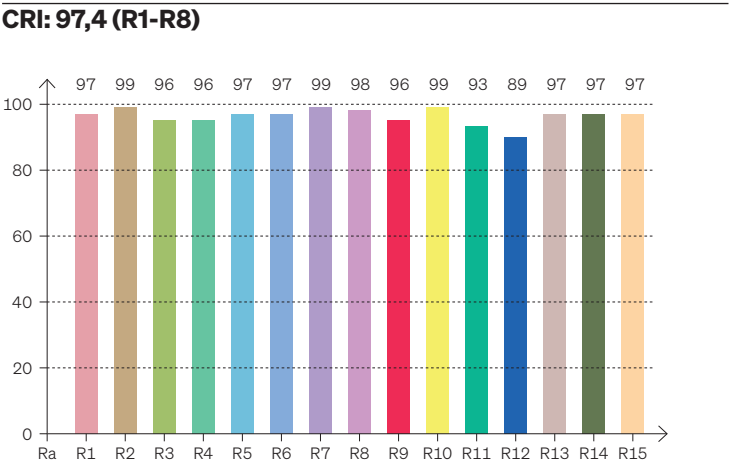

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,4	97	99	96	96	97	97	99	98	96	99	93	89	97	97	97

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Division from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3067 K	97,4	96,3	95,8	102,3	96,3	0,431	0,399	0,249	0,346	-0,0010

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.