
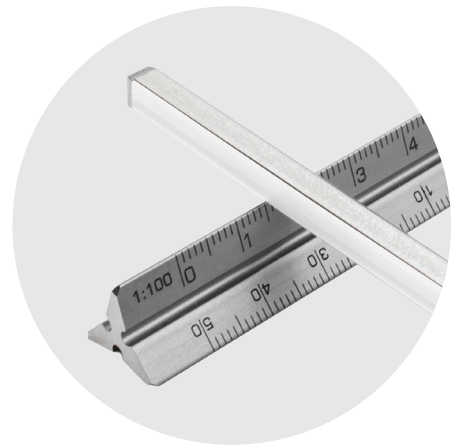


Tokio Nano

192 LED/m • 58 LED/ft
9,0 W/m • 2,7 W/ft
192 LED/m • 58 LED/ft
15,0 W/m • 4,6 W/ft

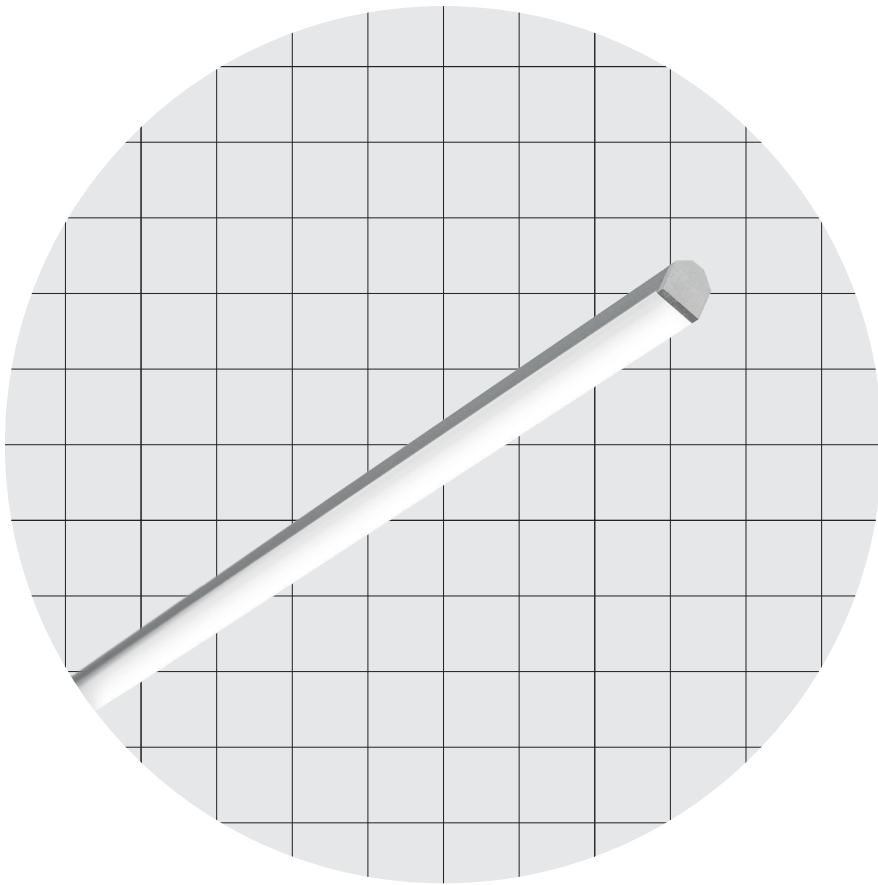

6,5 × 6,5 mm
0,25 × 0,25 "

Tokio Nano



Sharp Angled


Body Corpo		
Symmetrical linear profile Profilo lineare simmetrico		
Fastening Fissaggio	Caps + Magnetic tape	Tappi + Nastro magnetico
Screen Schermo	Opal OP20 (Screening 20%)	Opale OP20 (Scherm. 20%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 1000 mm • 39,37 "	Fino a 1000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia
Listings and marks Certificazioni e marchi		
  US LISTED   		

Light Luce		
Light source Sorgente luminosa	192 LED/m • 58 LED/ft	192 LED/m • 58 LED/ft
Power consumption Consumo energia	9,0 W/m • 2,7 W/ft	15,0 W/m • 4,6 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
CRI	Min 90	Min 90
R9	Min 50	Min 50
Rf @ 3000 K	92	92
Rg @ 3000 K	100	100
MacAdam ellipse	3	3
Luminous flux Flusso luminoso ● 3000 K	↓ OP20 – 54 lm/W 485 lm/m • 148 lm/ft	↓ OP20 – 53 lm/W 800 lm/m • 244 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC

Tokio Nano


Dimensions Dimensioni Scale/Scala 2:1

TAN Caps + Magnetic tape
Tappi + Nastro magnetico

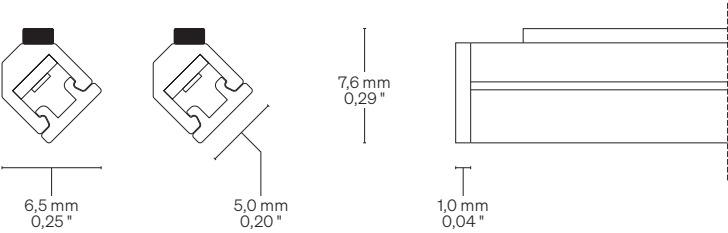

Fastening options Opzioni di fissaggio

TAN Caps + Magnetic tape (Thickness: 1,5 mm • 0,06")
Tappi + Nastro magnetico (Spessore: 1,5 mm)

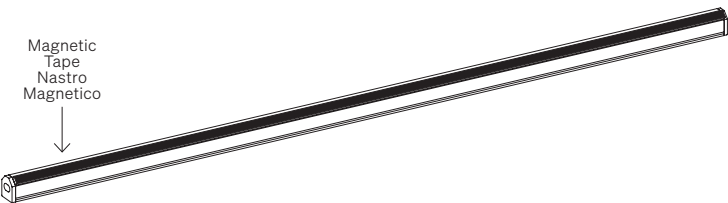


Order code Codice ordine

Basic codes Codici base	TKNF1929 Tokio Nano 192 LED/m • 58 LED/ft 9,0 W/m • 2,9 W/ft
	TKNF19215 Tokio Nano 192 LED/m • 58 LED/ft 15,0 W/m • 4,6 W/ft
CCT K CCT K	WW27 2700 K WW30 3000 K NW35 3500 K NW 4000 K CW 5000 K
Fastening options Opzioni di fissaggio	TAN Caps + Magnetic tape Tappi + Nastro magnetico
Screens Schermi	OP20 Opal 20/Opale 20
Custom size Lunghezza ordinabile	-- Specify the size Specificare la misura


Order example Esempio ordine	TKNF1929 WW27 TAN OP20 • 0,32 Tokio Nano, 192 LED/m • 58 LED/ft, 9,0 W/m • 2,9 W/ft, Warm White 2700, Caps + Magnetic tape, Opal 20 screen • 0,32 m Tokio Nano, 192 LED/m, 9,0 W/m, Warm White 2700, Tappi + Nastro magnetico, Scherma opale 20 • 0,32 m
--	---

Cable outlet Uscita cavi

Left side Lato sinistro

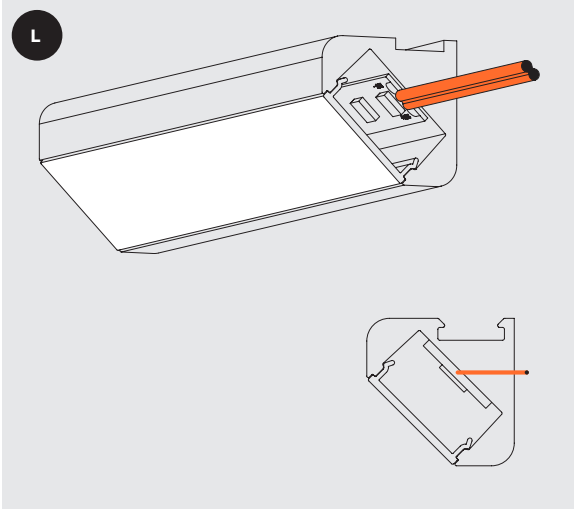

Right side Lato destro

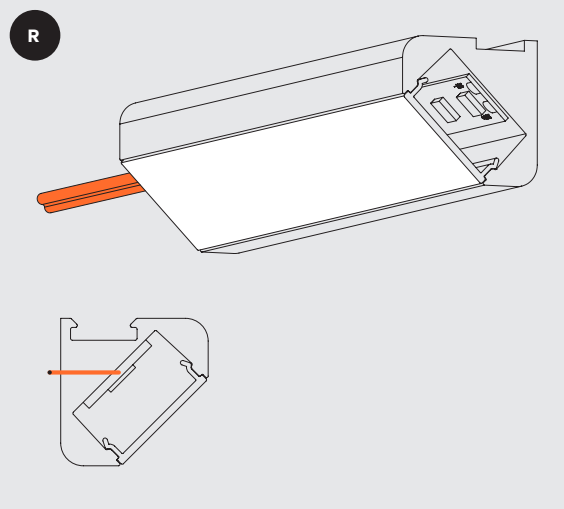

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.