

FRS99

PATENTED
PRODUCT



Sharp

Body Corpo

Symmetrical linear profile

Profilo lineare simmetrico

| | | |
|--|--------------------------------------|--|
| Fastening Fissaggio | Caps + Magnets Caps + 45° Magnets | Tappi + Magneti Tappi + Magneti 45° |
| Screen Schermo | FRS (Flux Recovery System) | FRS (Flux Recovery System) |
| Wiring set Cavo alimentazione | 2000 mm • 78,74 " | 2000 mm |
| Custom size Lunghezza ordinabile | Up to 2000 mm • 78,74 " | Fino a 2000 mm |
| Finishing Finitura | Satin polycarbonate | Policarbonato satinato |

Listings and marks

Certificazioni e marchi



LED
LED




Light Luce

| | | | |
|---|--|--|--|
| Light source Sorgente luminosa | 182 LED/m • 55 LED/ft | 182 LED/m • 55 LED/ft | 182 LED/m • 55 LED/ft |
| Power consumption Consumo energia | 5,0 W/m • 1,5 W/ft | 9,5 W/m • 2,9 W/ft | 15,7 W/m • 4,8 W/ft |
| CCT K Mixing on demand Miscelazione su richiesta | <ul style="list-style-type: none"> ● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K | <ul style="list-style-type: none"> ● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K | <ul style="list-style-type: none"> ● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K |
| CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse | Min 90 Min 50 92 100 3 | Min 90 Min 50 92 100 3 | Min 90 Min 50 92 100 3 |
| Luminous flux Flusso luminoso ● 3000 K | ↓ FRS – 136 lm/W 680 lm/m • 207 lm/ft | ↓ FRS – 136 lm/W 1290 lm/m • 393 lm/ft | ↓ FRS – 136 lm/W 2135 lm/m • 651 lm/ft |
| Input voltage Tensione di ingresso | 24 V DC | 24 V DC | 24 V DC |



Dimensions Dimensioni

Scale/Scala 1:1

TAM Caps + Magnets
Tappi + Magneti

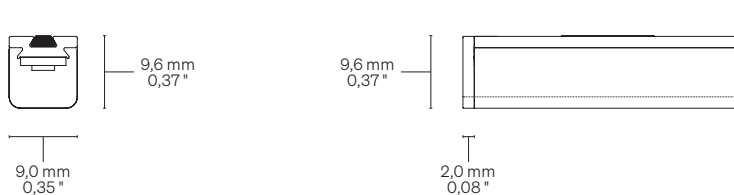


TAM45 Caps + 45° Magnets
Tappi + Magneti 45°


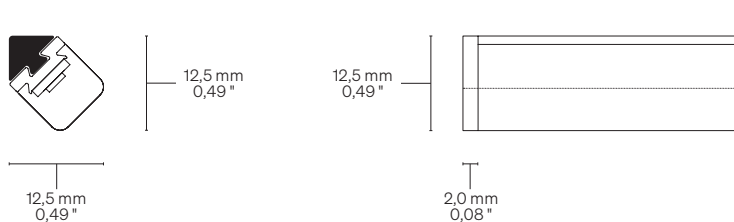


Fastening options Opzioni di fissaggio

TAM Caps + Magnets
Tappi + Magneti

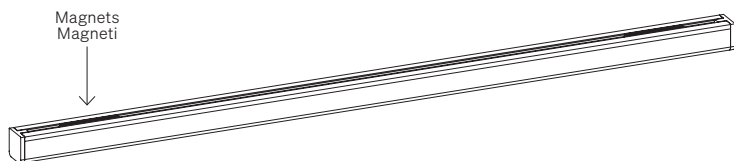

TAM45 Caps + 45° Magnets
Tappi + Magneti 45°

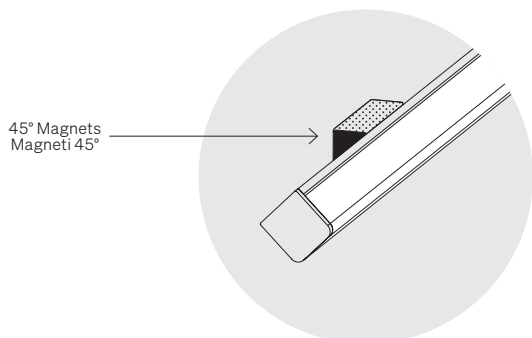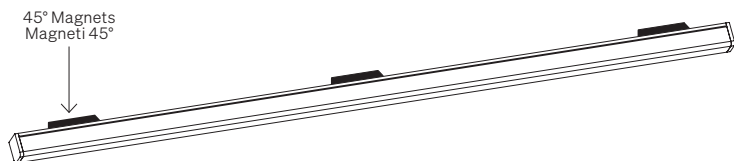

Order code Codice ordine

| | |
|--|--|
| Basic code Codice base | <ul style="list-style-type: none"> FRSF1825 FRS99 182 LED/m • 55 LED/ft 5,0 W/m • 1,5 W/ft FRSF1829 FRS99 182 LED/m • 55 LED/ft 9,5 W/m • 2,9 W/ft FRSF18215 FRS99 182 LED/m • 55 LED/ft 15,7 W/m • 4,8 W/ft |
| CCT K CCT K | <ul style="list-style-type: none"> WW27 2700 K WW30 3000 K NW35 3500 K NW 4000 K CW 5000 K |
| Fastening options Opzioni di fissaggio | <ul style="list-style-type: none"> TAM Caps + Magnets Tappi + Magneti TAM45 Caps + 45° Magnets Tappi + Magneti 45° |
| Screen Schermo | <ul style="list-style-type: none"> FR FRS 120° |
| Custom size Lunghezza ordinabile | <ul style="list-style-type: none"> -- Specify the size Specificare la misura |

| | |
|--|--|
| Order example Esempio ordine | <ul style="list-style-type: none"> FRSF1825 WW27 TAM FR • 0,32 FRS99, 182 LED/m • 55 LED/ft, 5,0 W/m • 1,5 W/ft, Warm White 2700, Caps + Magnets, FRS (Flux Recovery System) • 0,32 m FRS 99, 182 LED/m, 5,0 W/m, Warm White 2700, Tappi + Magneti, FRS (Flux Recovery System) • 0,32 m |
|--|--|