

# Glider



Sharp Asym.

## Body Corpo

### Linear asymmetric profile Profilo lineare asimmetrico

<b>Fastening</b> Fissaggio	Caps + Plastic clips Caps + Magnets	Tappi + Clip in plastica Tappi + Magneti
<b>Screen</b> Schermo	Transparent TR7 (Screening 7%) Opal OP30 (Screening 30%) Opal OP50 (Screening 50%)	Trasparente TR7 (Schermatura 7%) Opale OP30 (Scherm. 30%) Opale OP50 (Scherm. 50%)
<b>Wiring set</b> Cavo alimentazione	2000 mm • 78,74 "	2000 mm
<b>Custom size</b> Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
<b>Finishing</b> Finitura	● Grey anodized	● Anodica grigia

### Listings and marks Certificazioni e marchi



### LED LED




## Light Luce

<b>Light source</b> Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
<b>Power consumption</b> Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
<b>CCT K</b>	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2200 - 5700 K
Mixing on demand Miscelazione su richiesta				
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
<b>Luminous flux</b> Flusso luminoso ● 3000 K	↓ <b>A - TR5</b> - 104 lm/W 1040 lm/m • 317 lm/ft ↓ <b>A - OP20</b> - 72 lm/W 715 lm/m • 218 lm/ft ↓ <b>A - OP50</b> - 59 lm/W 585 lm/m • 178 lm/ft	↓ <b>A - TR5</b> - 112 lm/W 1692 lm/m • 516 lm/ft ↓ <b>A - OP20</b> - 77 lm/W 1163 lm/m • 355 lm/ft ↓ <b>A - OP50</b> - 63 lm/W 951 lm/m • 290 lm/ft	↓ <b>A - TR5</b> - 131 lm/W 2624 lm/m • 800 lm/ft ↓ <b>A - OP20</b> - 90 lm/W 1804 lm/m • 550 lm/ft ↓ <b>A - OP50</b> - 73 lm/W 1476 lm/m • 450 lm/ft	↓ <b>A - TR5</b> - 72 lm/W 1440 lm/m • 439 lm/ft ↓ <b>A - OP20</b> - 50 lm/W 990 lm/m • 302 lm/ft ↓ <b>A - OP50</b> - 41 lm/W 810 lm/m • 247 lm/ft
<b>Luminous flux</b> Flusso luminoso ● 3000 K	↓ <b>B - TR5</b> - 104 lm/W 1040 lm/m • 317 lm/ft ↓ <b>B - OP20</b> - 69 lm/W 689 lm/m • 210 lm/ft ↓ <b>B - OP50</b> - 52 lm/W 520 lm/m • 159 lm/ft	↓ <b>B - TR5</b> - 112 lm/W 1692 lm/m • 516 lm/ft ↓ <b>B - OP20</b> - 74 lm/W 1120 lm/m • 341 lm/ft ↓ <b>B - OP50</b> - 56 lm/W 846 lm/m • 258 lm/ft	↓ <b>B - TR5</b> - 131 lm/W 2624 lm/m • 800 lm/ft ↓ <b>B - OP20</b> - 87 lm/W 1738 lm/m • 530 lm/ft ↓ <b>B - OP50</b> - 65 lm/W 1312 lm/m • 400 lm/ft	↓ <b>B - TR5</b> - 72 lm/W 1440 lm/m • 439 lm/ft ↓ <b>B - OP20</b> - 48 lm/W 954 lm/m • 291 lm/ft ↓ <b>B - OP50</b> - 36 lm/W 720 lm/m • 220 lm/ft
<b>Input voltage</b> Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC


## Dimensions Dimensioni

Scale/Scala 1:1


### TA Caps + Plastic clips Tappi + Clip in plastica

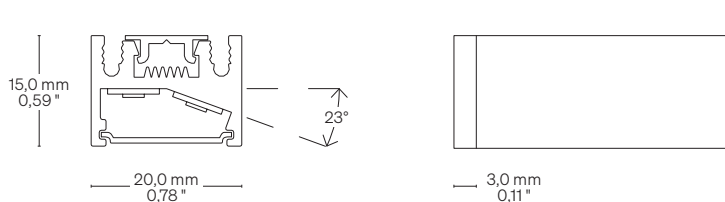

### TAM Caps + Magnets Tappi + Magneti

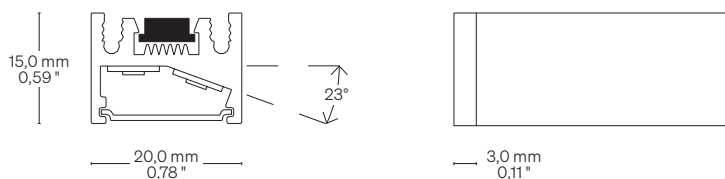

## Strip LED position Posizione strip LED

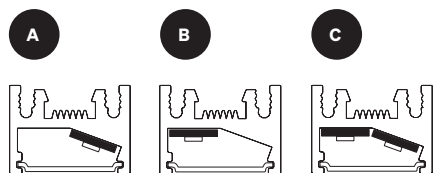


C. With this configuration of the stripes, there are limitations on the maximum power usable.

C. Per questa configurazione ci sono delle limitazioni riguardo alla potenza massima utilizzabile.

## Fastening options Opzioni di fissaggio

### TA Caps + Plastic clips Tappi + Clip in plastica

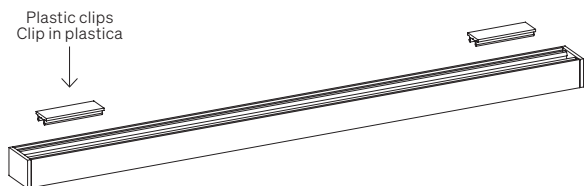

### TAM Caps + Magnets Tappi + Magneti



## Order code Codice ordine

### Basic code Codice base

- **GLF144** Glider  
144 LED/m • 44 LED/ft  
10,0 W/m • 3,1 W/ft
- **GLF168** Glider  
168 LED/m • 52 LED/ft  
15,0 W/m • 4,6 W/ft
- **GLF182** Glider  
182 LED/m • 56 LED/ft  
20,0 W/m • 6,1 W/ft
- **GLF252** Glider  
TW 252 LED/m • 77 LED/ft  
2200 - 5700 K  
20,0 W/m • 6,1 W/ft

### CCT K CCT K

- **WW27** 2700 K
- **WW30** 3000 K
- **NW35** 3500 K
- **NW** 4000 K
- **CW** 5000 K

### Strip LED position Posizione strip LED

- **A** Side  
Laterale
- **B** Zenith. On the plane  
Zenitale. Sul piano
- **C** Double strip LED  
Doppia strip LED

### Fastening options Opzioni di fissaggio

- **TA** Caps + Plastic clips  
Tappi + Clip in plastica
- **TAM** Caps + Magnets  
Tappi + Magneti

### Screen Schermo

- **TR7** Transparent/Trasparente 7
- **OP30** Opal/Opale 30
- **OP50** Opal/Opale 50

### Custom size Lunghezza ordinabile

- -- Specify the size  
Specificare la misura

### Order example Esempio ordine

- **GLF144 WW27 A TA TR7 • 0,32**  
Glider, 144 LED/m • 44 LED/ft,  
10,0 W/m • 3,1 W/ft, Warm White 2700,  
Side, Caps + Plastic clips,  
Transparent 7 • 0,32 m
- Glider, 144 LED/m, 10,0 W/m,  
Warm White 2700,  
Laterale, Tappi + Clip in plastica,  
Trasparente 7 • 0,32 m