



Body Corpo

Aadjustable aluminium spotlight with support

Spot in alluminio orientabile con sostegno

Fastening Fissaggio	Laying on plane + Nut	In appoggio + Dado
Optics Ottica	120°	120°
Wiring set Cavo alimentazione	1500 mm • 59,06 "	1500 mm
Finishing Finitura	● Chrome galvanized	● Galvanica cromo

Listings and marks

Certificazioni e marchi



LED

LED




Light Luce


Light source Sorgente luminosa	↓ Series/In serie V CC: 2,0 W @ 350mA	↓ Parallel/In parallelo 2,1 W @ 24 V DC
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 96 103 2	Min 90 Min 50 92 100 3
Luminous flux Flusso luminoso ● 3000 K	202 lm @ 350mA	202 lm
Input voltage/current Tensione/Corrente di ingresso	@350 mA	24 V DC
Only external driver Driver solo esterno	-	DC/CC

Dimensions Dimensioni

Scale/Scala 1:2

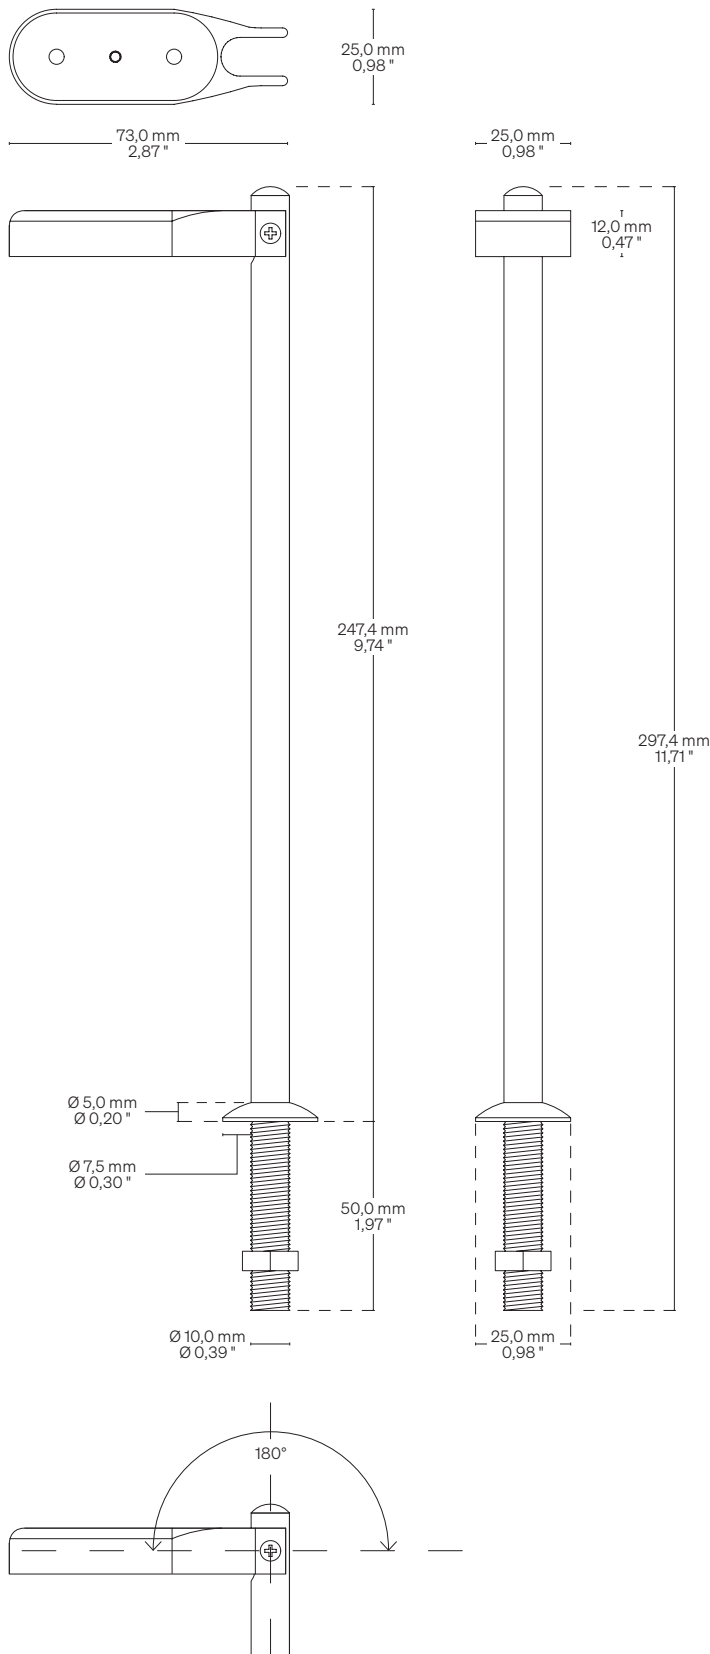

Fastening options Opzioni di fissaggio

 Hole size: $\varnothing 10,5 \text{ mm} \bullet \varnothing 0,41 \text{ ''}$
Dimensione foro: $\varnothing 10,5 \text{ mm}$

Order code Codice ordine

Basic code Codice base	IS	Iris
CCT K CCT K	WW27 WW30 NW35 NW CW	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Accessories Accessori	DRPWM DRDC	Converter 24 V DC/ Convertitore 24 V DC Converter 24 V DC Potential different dimmer/ Convertitore 24 V DC Dimmerabile in tensione
Order example Esempio ordine	IS WW27 DRPVM	Iris, Warm White 2700, Converter 12 V DC - PWM Dimmer Iris, Warm White 2700, Convertitore 12 V DC - Dimmerabile PWM