

Light efficiency:

69 Lumen/Watt


Light quality:

CRI: 96,1

Color temperature:

3028 K

Output: 865 Lumen

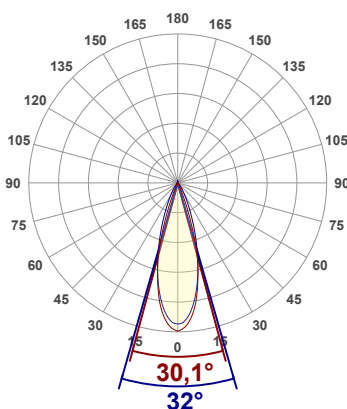

Product name:

PLANK OPTICS P4 LOUVERS-3000K-25-500mm

Date and time:

25/02/2025 11:03:06


Power consumption:

Power	Power factor
12,5 W	1,0
Voltage ( Vcc )	Current
24,0 V	0,519 A


## TM-30 details

Rf 95,3  
Fidelity index Rf


Rg 102,8  
Gamut index Rg

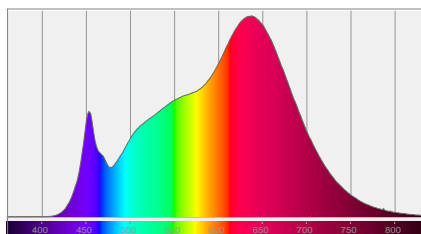

Spectral distribution

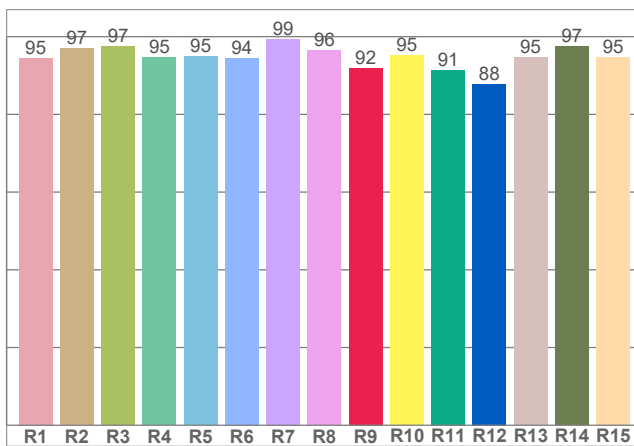


CRI R values



White color point

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3028 K	96,1	92,0	95,3	102,8	96,2	0,431	0,394	0,251	0,344	-0,0031

## Beam details

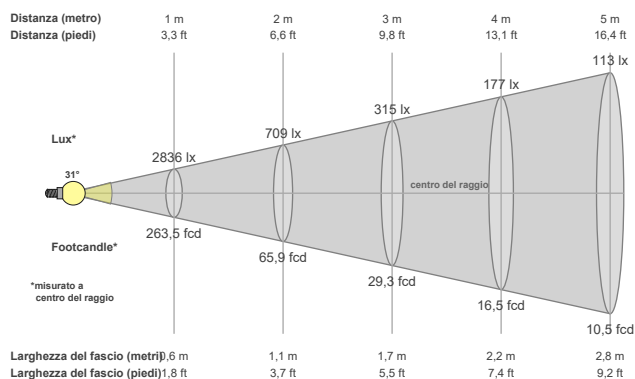

## Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
31,3°	52,2°	64,1°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
2928 cd	98,5%	97,9%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2836lx	709lx	315lx	177lx	113lx	79lx	58lx	44lx	35lx	28lx	23lx	20lx	17lx	14lx	13lx	11lx	10lx	9lx	8lx	7lx
263,5fcd	65,9fcd	29,3fcd	16,5fcd	10,5fcd	7,3fcd	5,4fcd	4,1fcd	3,3fcd	2,6fcd	2,2fcd	1,8fcd	1,6fcd	1,3fcd	1,2fcd	1fcd	0,9fcd	0,8fcd	0,7fcd	0,7fcd