


# Plank Optics P4



Spotted

## Accessory Louvers Accessorio Louvers

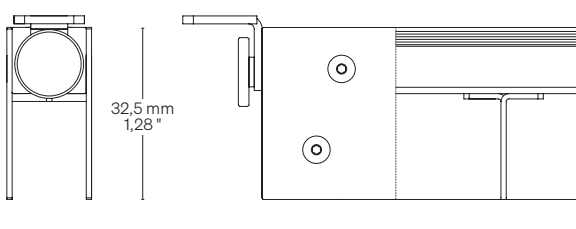

On request. Please contact us: [sales@formulaluci.com](mailto:sales@formulaluci.com)  
 Su richiesta. Puoi contattarci: [sales@formulaluci.com](mailto:sales@formulaluci.com)

## Body Corpo

### Spot fixed on adjustable symmetrical linear profile

Spot fissi su profilo lineare simmetrico orientabile

<b>Fastening</b> Fissaggio	Caps + Plastic clips Caps + Magnets Adjustable heads with screws	Tappi + Clipin plastica Tappi + Magneti Testatine orientabili con viti
<b>Optics</b> Ottica	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)	20° • 25° • 38° • 44° • 62° • Oval (45°+25°)
<b>Wiring set</b> Cavo alimentazione	2000 mm • 78,74 "	2000 mm
<b>Custom size</b> Lunghezza ordinabile	Up to 850 mm • 33,50 " (Caps or heads included) (Max 20 LED)	Fino a 850 mm (Tappi o testatine compresi) (Massimo 20 LED)
<b>Finishing</b> Finitura	● Black matt	● Nero opaco

### Listings and marks

Certificazioni e marchi



### LED

LED




## Light Luce

<b>Pitch</b> Passo	↓ <b>P4</b> 38,5 mm • 1,52 "
<b>Light source</b> Sorgente luminosa	26 LED/m • 8 LED/ft
<b>Power consumption</b> Consumo energia	Up to 26,0 W/m • 7,92 W/ft @ 350mA Fino a 26,0 W/m @ 350mA
<b>CCT K</b>	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta	
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 80 95 102 2
<b>Luminous flux</b> Flusso luminoso ● 3000 K	2626 @ 350mA 101 lm/W
<b>Input current</b> Corrente di ingresso	CC - Up to 400mA CC - Fino a 400mA


## Dimensions Dimensioni

Scale/Scala 1:1


### TA Caps + Plastic clips Tappi + Clipin plastica

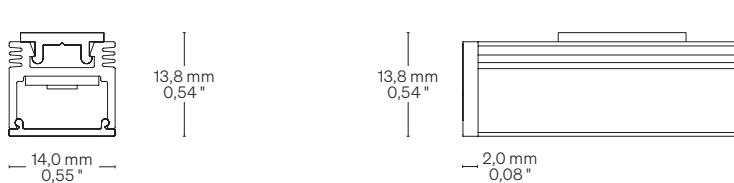

### TAM Caps + Magnets Tappi + Magneti

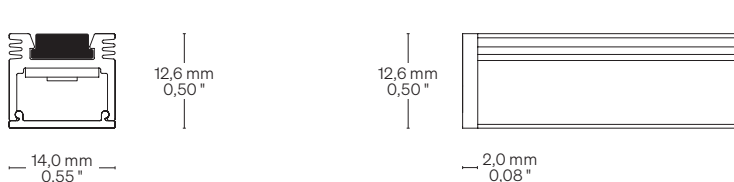


### TO Adjustable heads with screws Testatine orientabili con viti

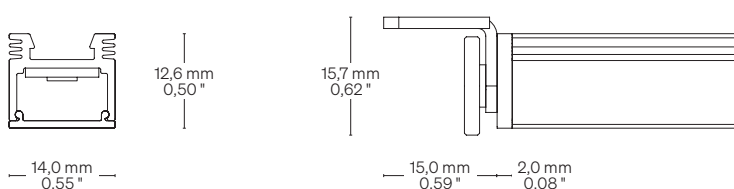


## Fastening options Opzioni di fissaggio


### TA Caps + Plastic clips Tappi + Clip in plastica

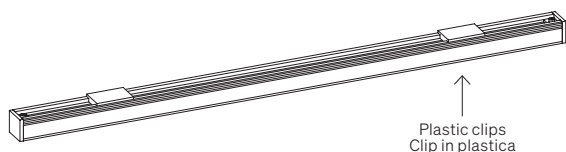

### TAM Caps + Magnets Tappi + Magneti

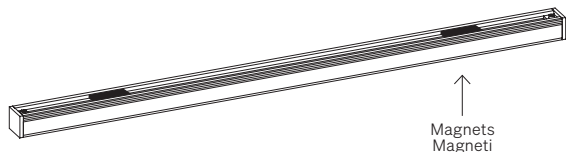

### TO Adjustable heads with screws Testatine orientabili con viti

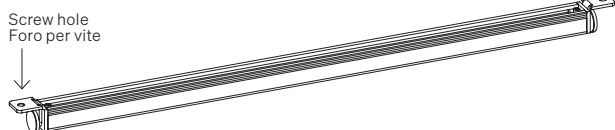

## Order code Codice ordine

<b>Basic code</b> Codice base	• <b>PKO4</b>	Plank Optics P4 26 LED/m • 8 LED/ft
<b>CCT K</b> CCT K	• <b>WW27</b> • <b>WW30</b> • <b>NW35</b> • <b>NW</b> • <b>CW</b>	• 2700 K • 3000 K • 3500 K • 4000 K • 5000 K
<b>Fastening options</b> Opzioni di fissaggio	• <b>TA</b>  • <b>TAM</b>  • <b>TO</b>	Caps + Plastic clips Tappi + Clip in plastica Caps + Magnets Tappi + Magneti Adjustable heads with screws Testatine orientabili con viti
<b>Optics</b> Ottica	• <b>20</b> • <b>25</b> • <b>38</b> • <b>44</b> • <b>62</b> • <b>OVAL</b>	20° 25° 38° 44° 62° Oval (45°+25°)
<b>Accessories</b> Accessori	• <b>LV</b>	Louvers/Louvers
<b>Custom size</b> Lunghezza ordinabile	• --	Specify the size Specificare la misura

### Order example Esempio ordine

- **PKO4 WW27 TA 20 LV • 0,32**  
Plank Optics P4, 26 LED/m • 8 LED/ft  
Warm White 2700, Caps + Plastic clips,  
20° Optic, Louvers • 0,32 m
- Plank Optics P4, 26 LED/m,  
Warm White 2700, Tappi + Clip in plastica,  
Ottica 20°, Louvers • 0,32 m