

# Tokio Bridge



## Body Corpo

### Tokio profile fixed on vertical bars

Profilo Tokio fissato su montanti

<b>Screen</b> Schermo	Transparent TR5 (Screening 5%) Opal OP20 (Screening 20%) Opal OP50 (Screening 50%)	Trasparente TR5 (Schermatura 5%) Opale OP20 (Scherm. 20%) Opale OP50 (Scherm. 50%)
<b>Wiring set</b> Cavo alimentazione	1500 mm • 59,06 "	1500 mm
<b>Custom size</b> Lunghezza ordinabile	650 mm • 25,6 "	650 mm

### Listings and marks

Certificazioni e marchi



**LED**  
LED




## Light Luce


<b>Pitch</b> Passo	↓ <b>P5</b> 55,5 mm • 16,9 "	-
<b>Light source</b> Sorgente luminosa	18 LED/m • 5 LED/ft	168 LED/m • 52 LED/ft
<b>Power consumption</b> Consumo energia	19,8 W/m • 6,0 W/ft	15,0 W/m • 4,6 W/ft
<b>CCT K</b>  Mixing on demand Miscelazione su richiesta	<ul style="list-style-type: none"> <li>● 2700 K</li> <li>● 3000 K</li> <li>● 3500 K</li> <li>● 4000 K</li> <li>● 5000 K</li> </ul>	<ul style="list-style-type: none"> <li>● 2700 K</li> <li>● 3000 K</li> <li>● 3500 K</li> <li>● 4000 K</li> <li>● 5000 K</li> </ul>
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 80 96 103 2	Min 90 Min 50 92 100 3
<b>Luminous flux</b> Flusso luminoso ● 3000 K	↓ <b>OP30</b> – 55 lm/W 1090 lm/m • 332 lm/ft	↓ <b>OP30</b> – 88 lm/W 1332 lm/m • 406 lm/ft
<b>Input voltage</b> Tensione di ingresso	24 V DC	24 V DC

**Dimensions** Dimensioni

Scale/Scala 1:2

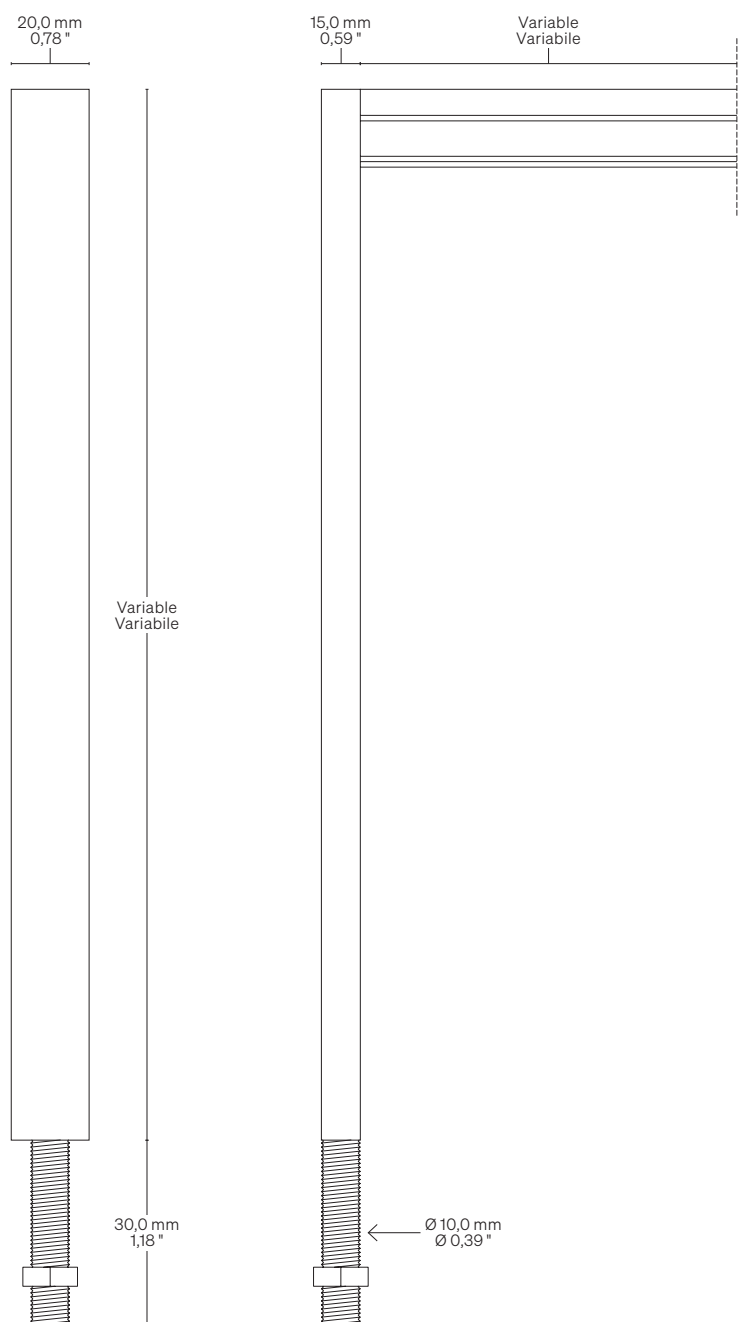

**Fastening options** Opzioni di fissaggio

 Hole size:  $\varnothing 10,5$  mm •  $\varnothing 0,41$  "  
Dimensione foro:  $\varnothing 10,5$  mm

**Order code** Codice ordine

**On request. Please contact us: [sales@formulaluci.com](mailto:sales@formulaluci.com)**  
Su richiesta. Puoi contattarci: [sales@formulaluci.com](mailto:sales@formulaluci.com)