

# Tondo Lens



## Body Corpo

### Aluminium spotlight recessed for furniture interior

Faretto in alluminio da incasso per mobili interni

<b>Fastening</b> Fissaggio	Pressure	A pressione
<b>Optics</b> Ottica	16° • 18° • 30° • 47°	16° • 18° • 30° • 47°
<b>Wiring set</b> Cavo alimentazione	140,0 mm • 5,51"	140,0 mm
<b>Finishing</b> Finitura	<input type="radio"/> Chrome galvanized <input type="radio"/> Argent varnish <input type="radio"/> White varnish	<input type="radio"/> Galvanica cromo <input type="radio"/> Vernice argento <input type="radio"/> Vernice bianca

### Listings and marks

Certificazioni e marchi



### LED

LED





## Light Luce

<b>Light source</b> Sorgente luminosa	LED ↓ <b>Series/In serie</b> V CC: 1,0 W	LED ↓ <b>Parallel/In parallelo</b> V DC: 1,1 W
<b>CCT K</b>	<input type="radio"/> 2700 K <input type="radio"/> 3000 K <input type="radio"/> 3500 K <input type="radio"/> 4000 K <input type="radio"/> 5000 K	<input type="radio"/> 2700 K <input type="radio"/> 3000 K <input type="radio"/> 3500 K <input type="radio"/> 4000 K <input type="radio"/> 5000 K
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 80 96 103 2	Min 90 Min 80 96 103 2
<b>Luminous flux</b> Flusso luminoso ● 3000 K	101 lm @ 350mA	101 lm @ 12 V DC
<b>Input voltage/current</b> Tensione/Corrente di ingresso	3 V CC @ 350mA	12 V DC

## Dimensions Dimensioni


Scale/Scala 1:1

**P** Pressure  
A pressione

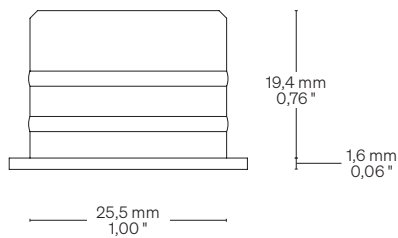

## Fastening options Opzioni di fissaggio

**P** Pressure  
A pressione

 Hole size: Ø 26,0 mm • Ø 1,02 "  
Dimensione foro: Ø 26,0 mm

## Order code Codice ordine

<b>Basic code</b> Codice base	<ul style="list-style-type: none"> <li><b>T11TL</b> Tondo Lens White/Bianco</li> <li><b>T13TL</b> Tondo Lens Chrome/Cromo</li> <li><b>T16TL</b> Tondo Lens Silver/Argento</li> </ul>
<b>CCT K</b> CCT K	<ul style="list-style-type: none"> <li><b>WW27</b> 2700 K</li> <li><b>WW30</b> 3000 K</li> <li><b>NW35</b> 3500 K</li> <li><b>NW</b> 4000 K</li> <li><b>CW</b> 5000 K</li> </ul>
<b>Optics</b> Ottica	<ul style="list-style-type: none"> <li><b>16</b> 16°</li> <li><b>18</b> 18°</li> <li><b>30</b> 30°</li> <li><b>47</b> 47°</li> </ul>
<b>Accessories</b> Accessori	<ul style="list-style-type: none"> <li><b>DRPWM</b> Converter 12 V DC/ Convertitore 12 V DC</li> <li><b>DRDC</b> Converter 12 V DC - Potential different dimmer Convertitore 12 V DC - Dimmerabile in tensione</li> </ul>
<b>Order example</b> Esempio ordine	<ul style="list-style-type: none"> <li><b>T11TL WW27 16 DRPWM</b> Tondo Lens - White varnish, Warm White 2700, 16° Optic, Converter 12 V DC Tondo Lens - Vernice bianca, Warm White 2700, Ottica 16°, Convertitore 12 V DC</li> </ul>