

Zaira



Sharp Asym.

Body Corpo

Linear asymmetric profile Profilo lineare asimmetrico

Fastening Fissaggio	Caps + Plastic clips Caps + Magnets	Tappi + Clip in plastica Tappi + Magneti
Screen Schermo	Transparent TR5 (Screening 5%) Opal OP20 (Screening 20%) Opal OP50 (Screening 50%)	Trasparente TR5 (Schermatura 5%) Opale OP20 (Scherm. 20%) Opale OP50 (Scherm. 50%)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Up to 3000 mm • 118,10 "	Fino a 3000 mm
Finishing Finitura	● Grey anodized	● Anodica grigia

Listings and marks Certificazioni e marchi



LED LED




Light Luce

Light source Sorgente luminosa	144 LED/m • 44 LED/ft	168 LED/m • 52 LED/ft	182 LED/m • 56 LED/ft	TW - 252 LED/m • 77 LED/ft Tunable White
Power consumption Consumo energia	10,0 W/m • 3,1 W/ft	15,0 W/m • 4,6 W/ft	20,0 W/m • 6,1 W/ft	20,0 W/m • 6,1 W/ft
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2200 - 5700 K
Mixing on demand Miscelazione su richiesta				
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Luminous flux Flusso luminoso ● 3000 K	↓ A - TR5 - 104 lm/W 1040 lm/m • 317 lm/ft ↓ A - OP20 - 72 lm/W 715 lm/m • 218 lm/ft ↓ A - OP50 - 59 lm/W 585 lm/m • 178 lm/ft	↓ A - TR5 - 112 lm/W 1692 lm/m • 516 lm/ft ↓ A - OP20 - 77 lm/W 1163 lm/m • 355 lm/ft ↓ A - OP50 - 63 lm/W 951 lm/m • 290 lm/ft	↓ A - TR5 - 131 lm/W 2624 lm/m • 800 lm/ft ↓ A - OP20 - 90 lm/W 1804 lm/m • 550 lm/ft ↓ A - OP50 - 73 lm/W 1476 lm/m • 450 lm/ft	↓ A - TR5 - 72 lm/W 1440 lm/m • 439 lm/ft ↓ A - OP20 - 50 lm/W 990 lm/m • 302 lm/ft ↓ A - OP50 - 41 lm/W 810 lm/m • 247 lm/ft
Luminous flux Flusso luminoso ● 3000 K	↓ B - TR5 - 104 lm/W 1040 lm/m • 317 lm/ft ↓ B - OP20 - 69 lm/W 689 lm/m • 210 lm/ft ↓ B - OP50 - 52 lm/W 520 lm/m • 159 lm/ft	↓ B - TR5 - 112 lm/W 1692 lm/m • 516 lm/ft ↓ B - OP20 - 74 lm/W 1120 lm/m • 341 lm/ft ↓ B - OP50 - 56 lm/W 846 lm/m • 258 lm/ft	↓ B - TR5 - 131 lm/W 2624 lm/m • 800 lm/ft ↓ B - OP20 - 87 lm/W 1738 lm/m • 530 lm/ft ↓ B - OP50 - 65 lm/W 1312 lm/m • 400 lm/ft	↓ B - TR5 - 72 lm/W 1440 lm/m • 439 lm/ft ↓ B - OP20 - 48 lm/W 954 lm/m • 291 lm/ft ↓ B - OP50 - 36 lm/W 720 lm/m • 220 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC	24 V DC	24 V DC


Dimensions Dimensioni

Scale/Scala 1:1


TA Caps + Plastic clips Tappi + Clip in plastica

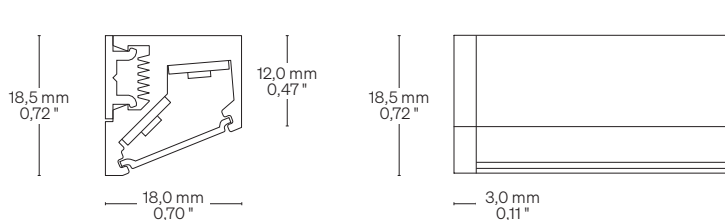

TAM Caps + Magnets Tappi + Magneti

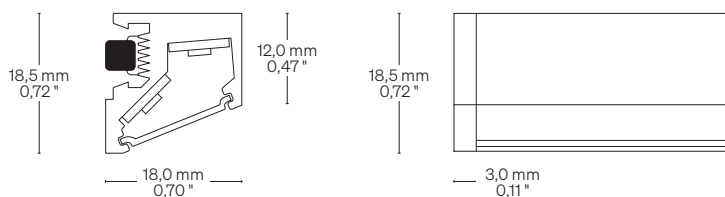

Strip LED position Posizione strip LED

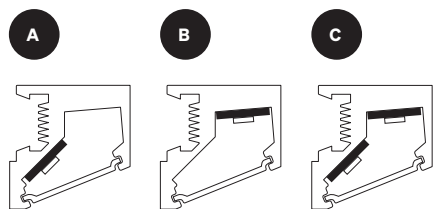


C. With this configuration of the stripes, there are limitations on the maximum power usable.


C. Per questa configurazione ci sono delle limitazioni riguardo alla potenza massima utilizzabile.

Fastening options Opzioni di fissaggio

TA Caps + Plastic clips Tappi + Clip in plastica

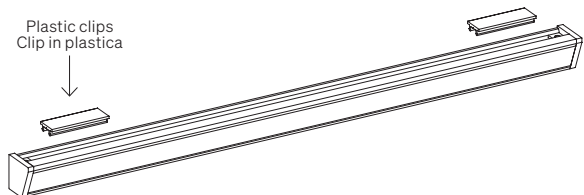

TAM Caps + Magnets Tappi + Magneti

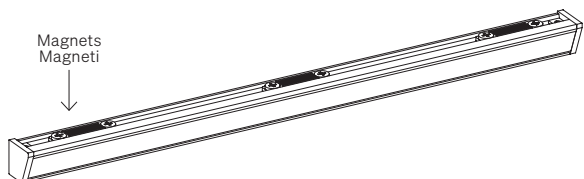

Order code Codice ordine

Basic code Codice base

- **ZAF144** Zaira
144 LED/m • 44 LED/ft
10,0 W/m • 3,1 W/ft
- **ZAF168** Zaira
168 LED/m • 52 LED/ft
15,0 W/m • 4,6 W/ft
- **ZAF182** Zaira
182 LED/m • 56 LED/ft
20,0 W/m • 6,1 W/ft
- **ZAF252** Zaira
TW 252 LED/m • 77 LED/ft
2200 - 5700 K
20,0 W/m • 6,1 W/ft

CCT K CCT K

- **WW27** 2700 K
- **WW30** 3000 K
- **NW35** 3500 K
- **NW** 4000 K
- **CW** 5000 K

Strip LED position Posizione strip LED

- **A** Side
Laterale
- **B** Zenith. On the plane
Zenitale. Sul piano
- **C** Double strip LED
Doppia strip LED

Fastening options Opzioni di fissaggio

- **TA** Caps + Plastic clips
Tappi + Clip in plastica
- **TAM** Caps + Magnets
Tappi + Magneti

Screen Schermo

- **TR5** Transparent/Trasparente 5
- **OP20** Opal/Opale 20
- **OP50** Opal/Opale 50

Custom size Lunghezza ordinabile

- -- Specify the size
Specificare la misura

Order example Esempio ordine

- **ZAF144 WW27 A TR5 • 0,32**
Zaira, 144 LED/m • 44 LED/ft,
10,0 W/m • 3,1 W/ft, Warm White 2700,
Side, Caps + Plastic clips,
Transparent 5 • 0,32 m
- Zaira, 144 LED/m, 10,0 W/m,
Warm White 2700,
Laterale, Tappi + Clip in plastica,
Trasparente 5 • 0,32 m