


4807 Bridge

182 LED/m • 55 LED/ft

9,5 W/m • 2,9 W/ft

182 LED/m • 55 LED/ft


15,7 W/m • 4,8 W/ft

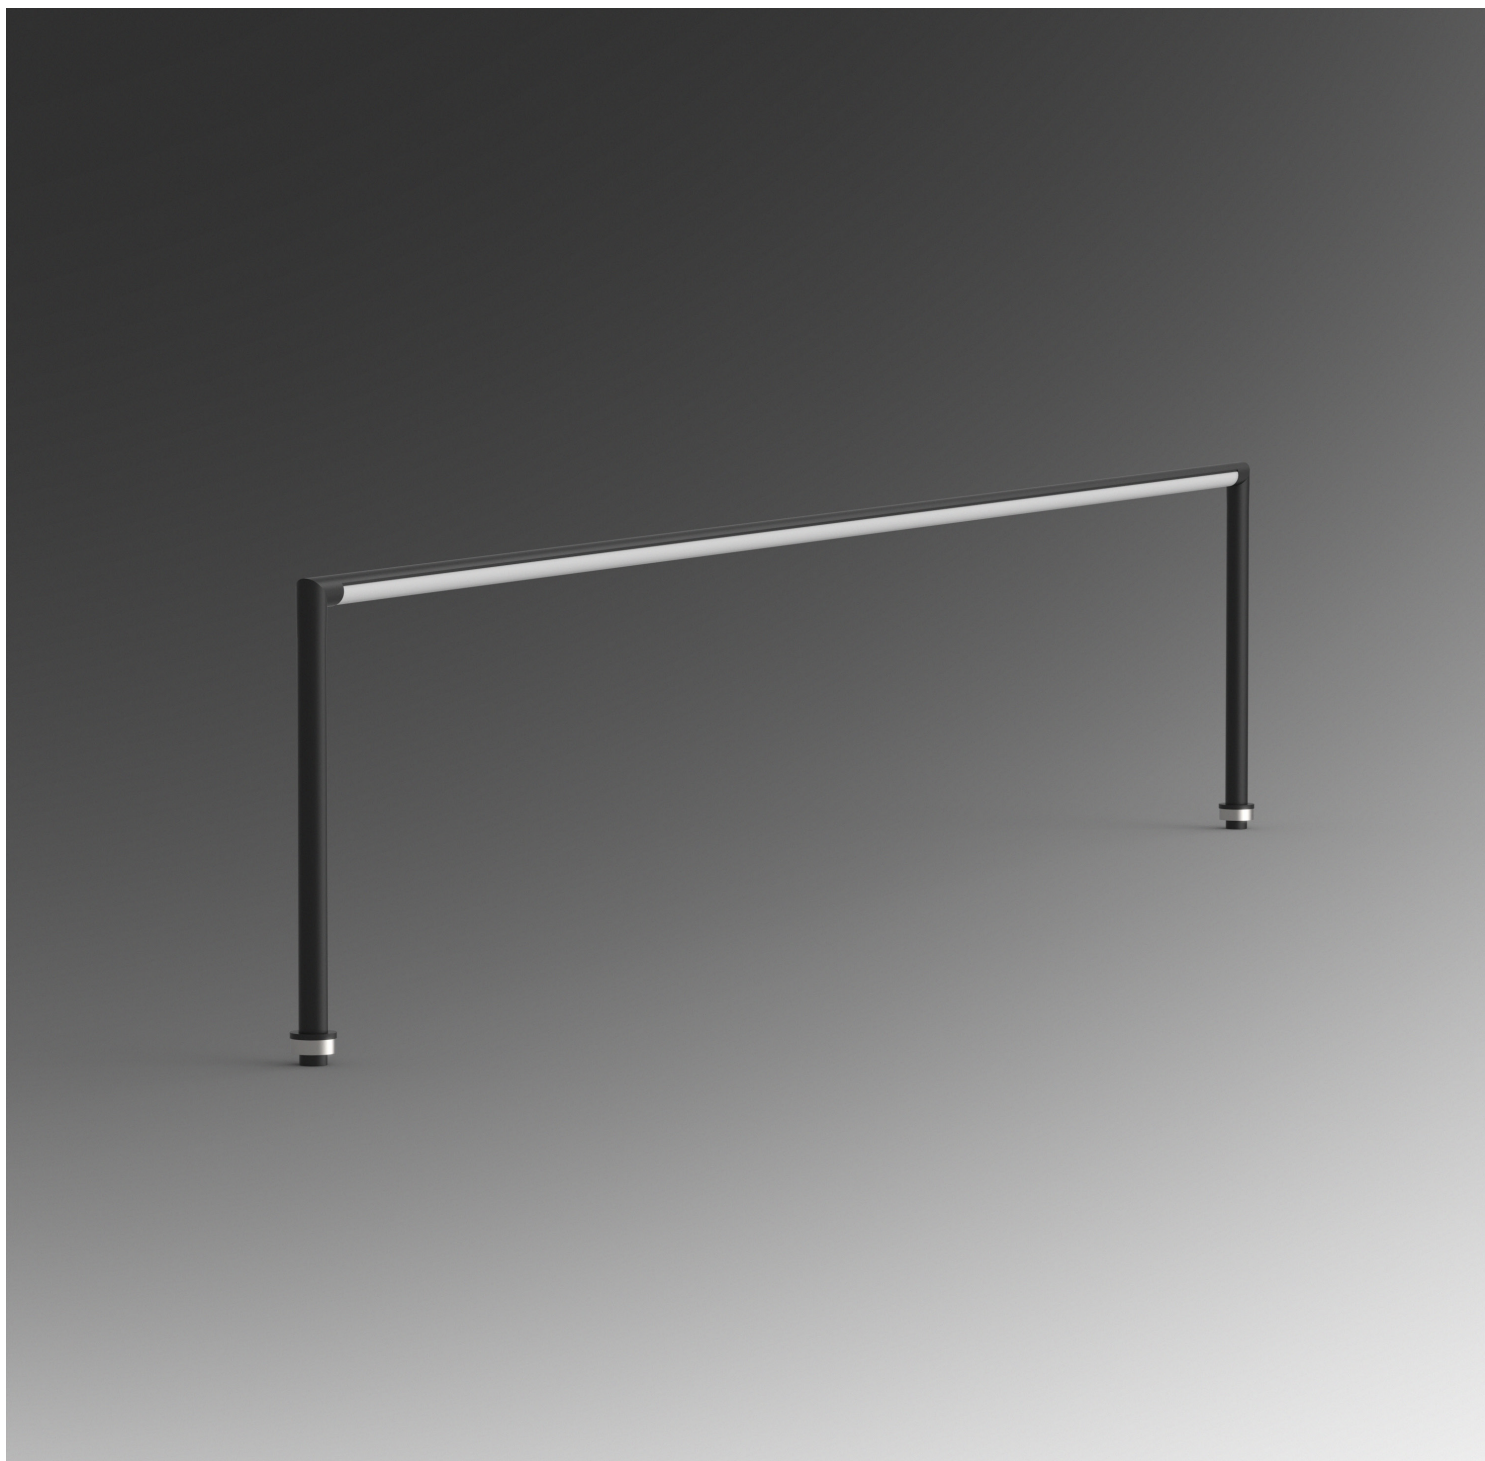

4807 Bridge



Sharp Angled

Body Corpo		
Linear light fixed on vertical bars Profilo lineare fissato su montanti		
Fastening Fissaggio	With magnets With threaded base	Con magneti Con base filettata
Screen Schermo	Transparent TR5 (Screening 5%) Opal OP50 (Screening 50%) OP50E (Opal 50 with eyelid)	Trasparente TR5 (Scher. 5%) Opale OP50 (Scher. 50%) OP50E (Opale 50 con palpebra)
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	Max 1200 mm • 47,24 " Height → On request Max 1200 mm Altezza → Su richiesta	
Finishing Finitura	● Black varnish → On request other finishes ● Vernice nera → Su richiesta altre finiture	
Listings and marks Certificazioni e marchi	     	
LED (See page CRI) LED (Vedi pagina CRI)	  Standard  On request	

Light Luce		
Light source Sorgente luminosa	182 LED/m • 55 LED/ft	182 LED/m • 55 LED/ft
Power consumption Consumo energia	9,5 W/m • 2,9 W/ft	15,7 W/m • 4,8 W/ft
CCT K On request/Su richiesta: ● Mixing/Miscelazione ● 2200 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
Delivered lumen output Flusso luminoso emesso ● 3000 K	↓ OP50 – 88 lm/W 836 lm/m • 255 lm/ft	↓ OP50 – 88 lm/W 1382 lm/m • 421 lm/ft
Input voltage Tensione di ingresso	24 V DC	24 V DC


4807 Bridge




4807 Bridge

Dimensions Dimensioni


Scale/Scala 1:2

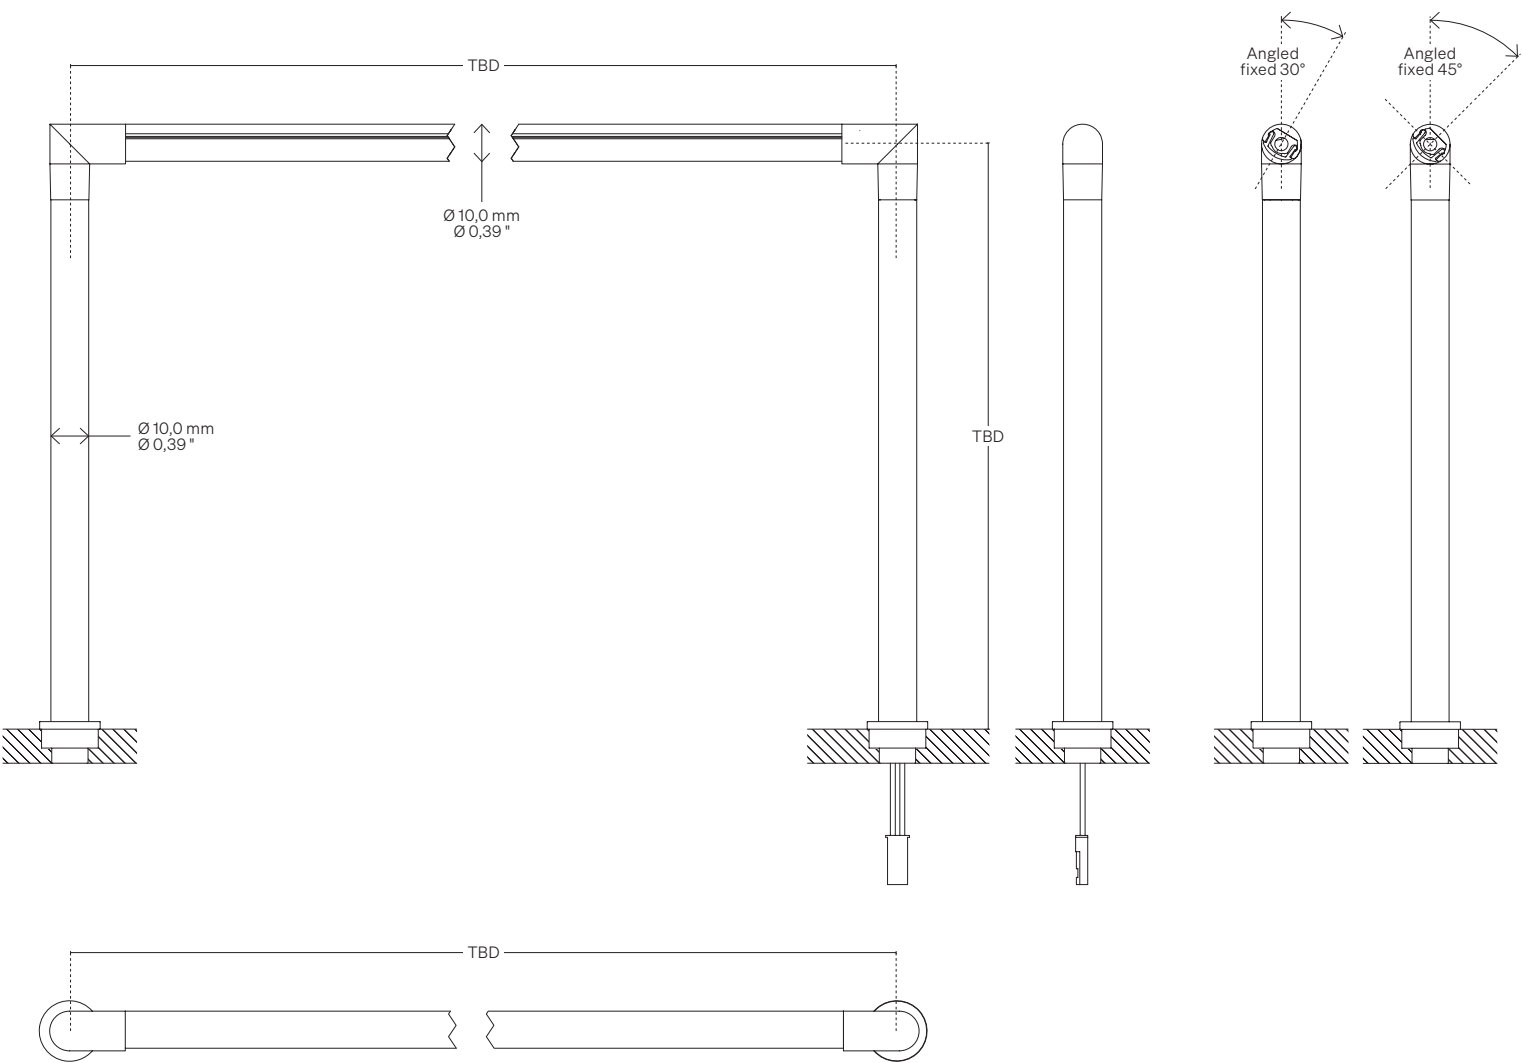

Angled fixed 30° Angolo fisso 30°

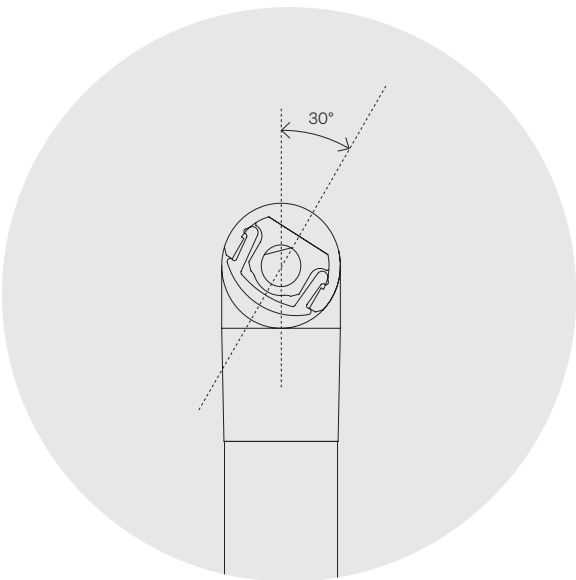



Angled fixed 45° Angolo fisso 45°

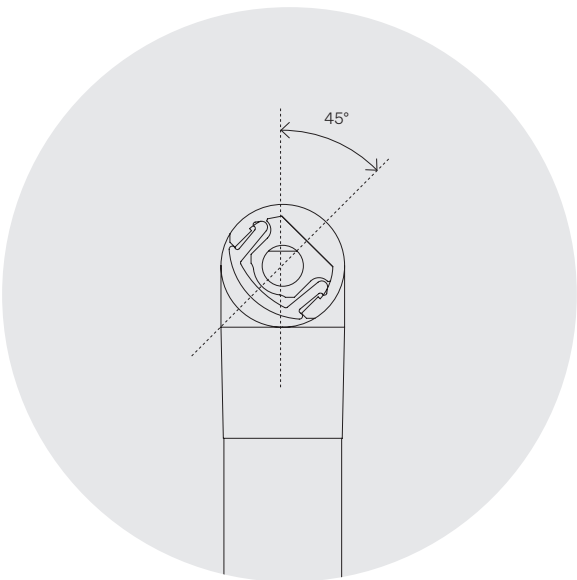

4807 Bridge

Central tige Stelo centrale

Scale/Scala 1:2

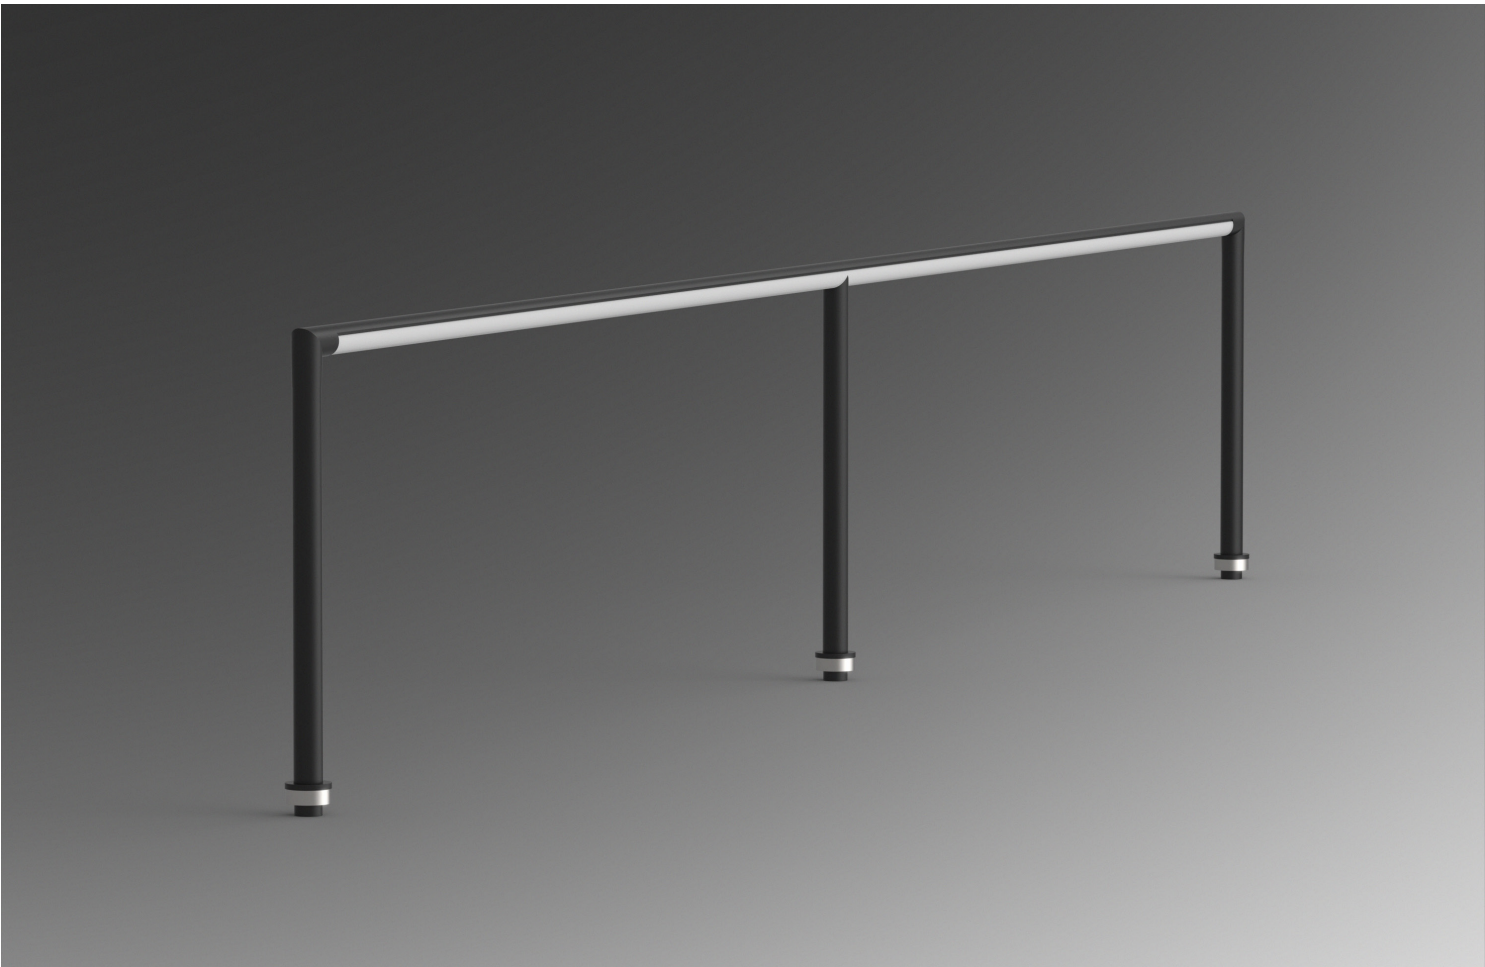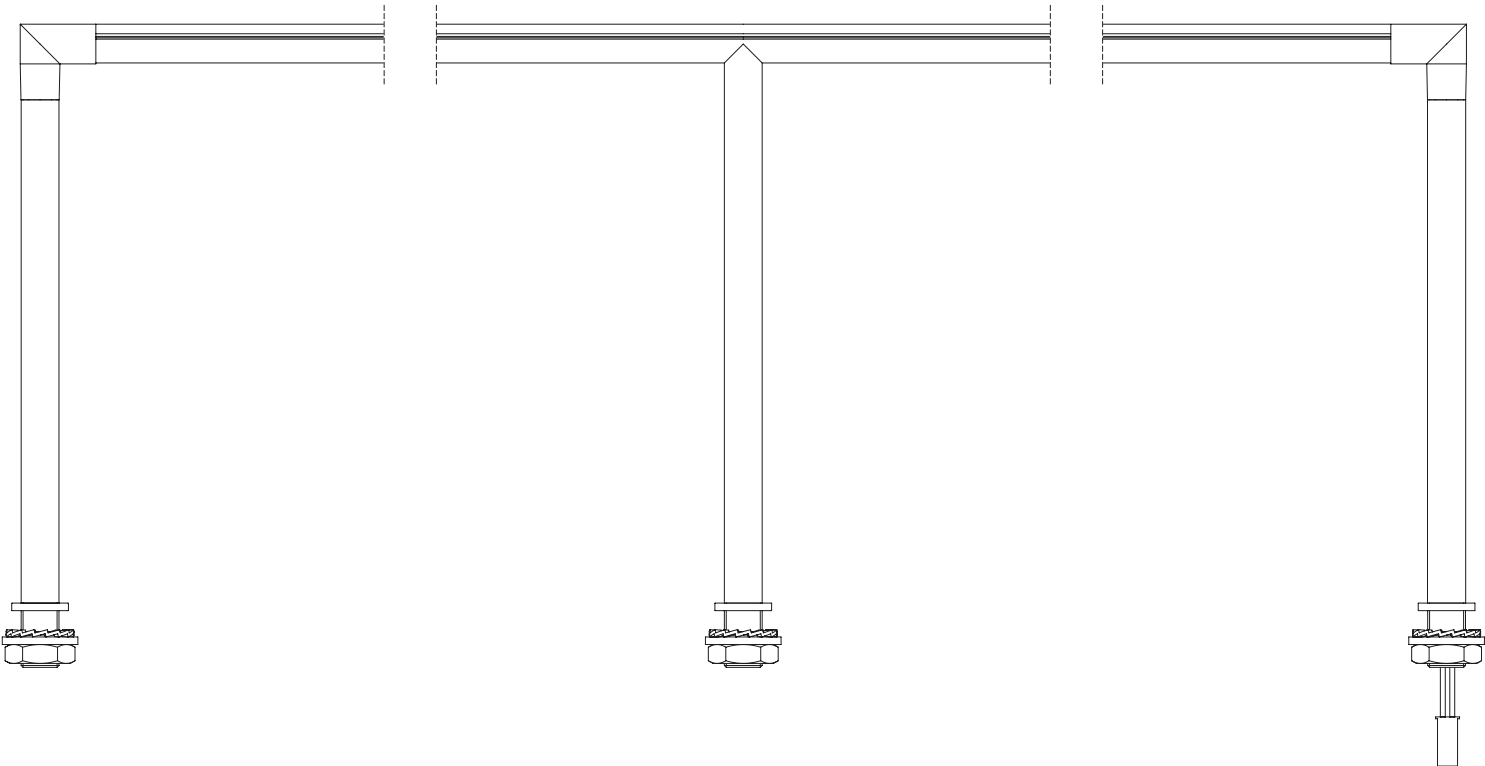

4807 Bridge


Fastening options Opzioni di fissaggio

M

With magnets inside the base
Con magneti all'interno della base



Hole size: $\varnothing 10,0 \sim 15,0 \text{ mm} \bullet \varnothing 0,39 \sim 0,59 \text{ "}$
Dimensione foro: $\varnothing 10,0 \sim 15,0 \text{ mm}$

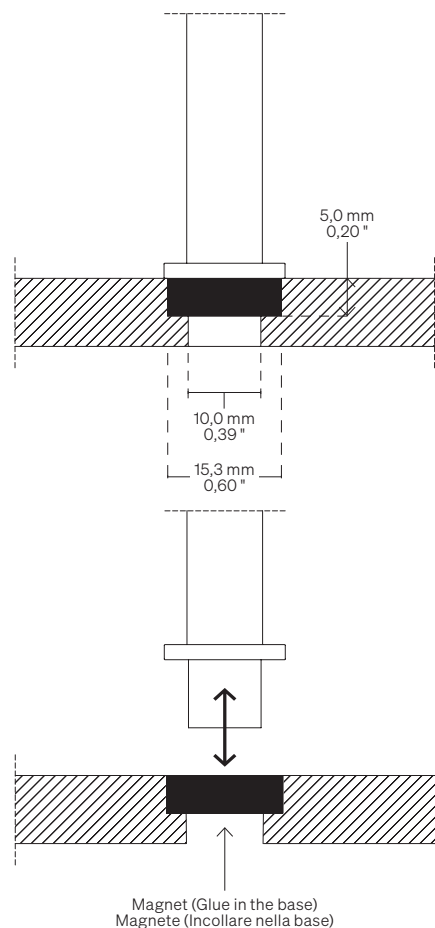


T



With threaded base
Con base filettata



Hole size: $\varnothing 10,0 \sim 15,0 \text{ mm} \bullet \varnothing 0,39 \sim 0,59 \text{ "}$
Dimensione foro: $\varnothing 10,0 \sim 15,0 \text{ mm}$

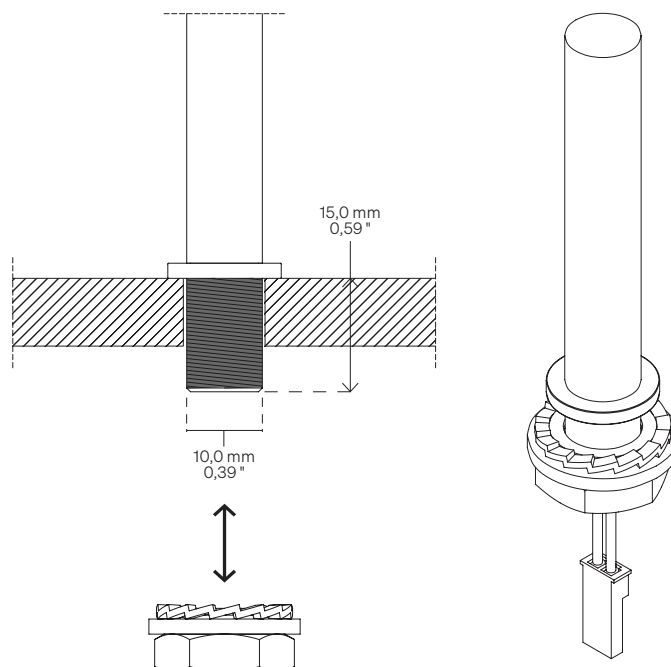


EASY FASTENING WITH MAGNETS
SGANCIO SEMPLICE CON MAGNETI

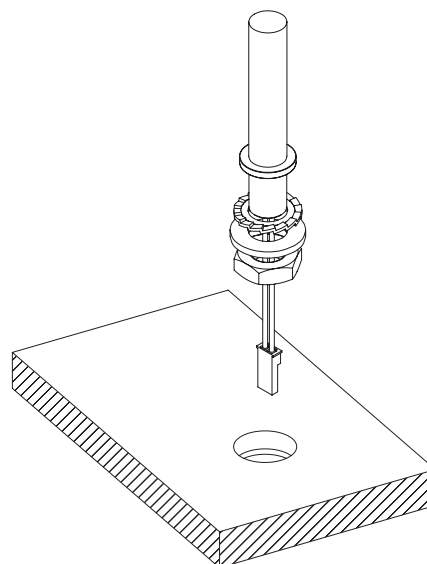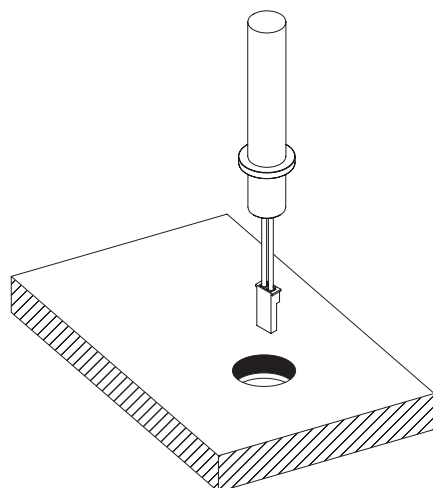

4807 Bridge

Eyelid accessory Accessorio palpebra

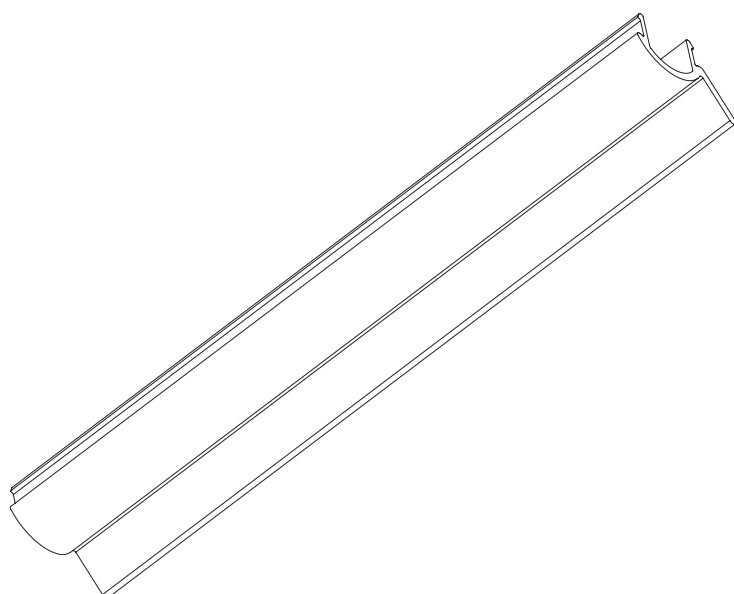


4807 Bridge


Eyelid dimensions Dimensioni palpebra

Scale/Scala 2:1

Angled fixed 30°
Angolo fisso 30°

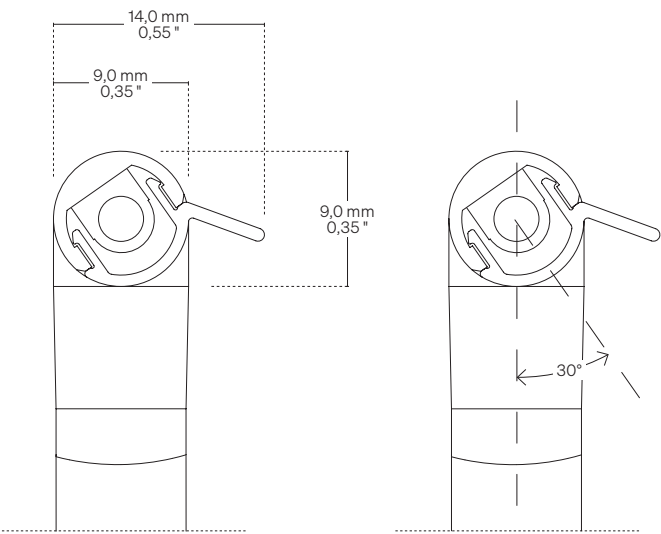

Angled fixed 45°
Angolo fisso 45°

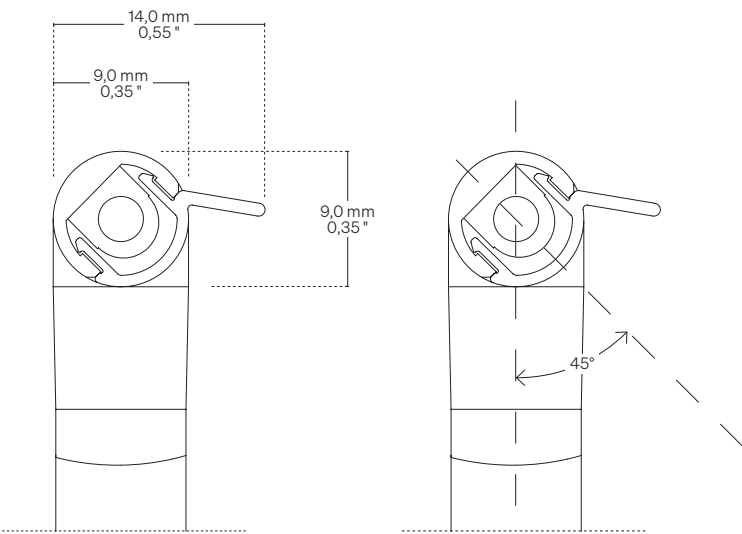

Eyelid detail (Scale 1:1)
Dettaglio palpebra (Scala 1:1)



4807 Bridge

Warnings Avvertenze

Order code Codice ordine

Basic code Codice base

- **4807F1829** 4807 Bridge
182 LED/m • 55 LED/ft
9,5 W/m • 2,9 W/ft
- **4807F18215** 4807 Bridge
182 LED/m • 55 LED/ft
15,7 W/m • 4,8 W/ft

CCT K CCT K

- **WW27** 2700 K
- **WW30** 3000 K
- **NW35** 3500 K
- **NW** 4000 K
- **CW** 5000 K

Fastening options Opzioni di fissaggio

- **M** With magnets
Con magneti
- **T** With threaded base
Con base filettata

Screen Schermo

- **TR5** Transparent/Trasparente 5
- **OP50** Opal/Opale 50
- **OP50E** Opal 50 with eyelid
Opal 50 con palpebra

Angled fixed Angolo fisso

- **30** Angled fixed 30°
Angolo fisso 30°
- **45** Angled fixed 45°
Angolo fisso 45°

Order example Esempio ordine

- **4807F1829 WW27 M TR5 30**

4807 Bridge, 182 LED/m • 55 LED/ft,
9,5 W/m • 2,9 W/ft, Warm White 2700,
Magnets, Transparent 5, Angled fixed 30°

4807 Bridge, 182 LED/m, 9,5 W/m,
Warm White 2700, Magneti,
Trasparente 5, Angolo fisso 30°

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.

CRI Typical* CRI Tipici*




R9050 – H6 • 3SDCM

High Efficacy

● 3000 K

Values taken from sample measurements
Valori presi da misurazioni a campione

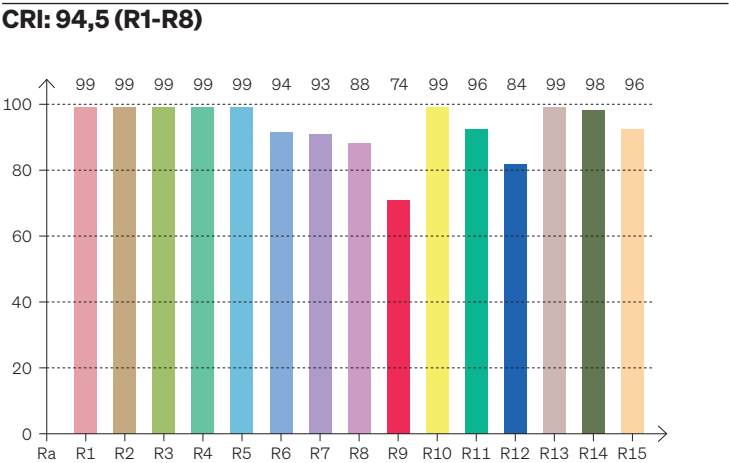

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,4	99	99	99	99	99	94	93	88	74	99	96	84	99	98	96

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3042 K	96,2	74,4	92,2	100,5	92,9	0,441	0,399	0,255	0,347	-0,0009




FULL SPECTRUM • 3SDCM

OPTISOLIS™

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

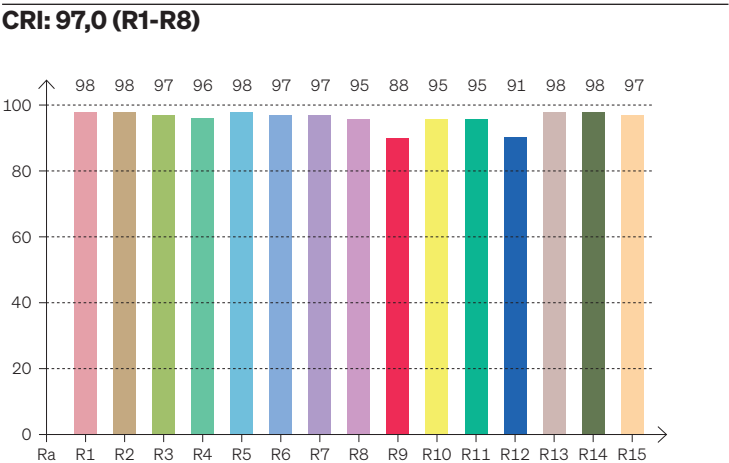

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,0	98	98	97	96	98	97	97	95	88	95	95	91	98	98	97

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3059 K	97,0	88,0	94,8	102,8	94,5	0,432	0,400	0,249	0,346	-0,0008