

TOOL-N Top Bend

280 LED/m • 85 LED/ft
6,0 W/m • 1,8 W/ft
280 LED/m • 85 LED/ft
12,0 W/m • 3,7 W/ft



6,0 W/m
1,8 W/ft
5,5 × 4,5 mm
0,22 × 0,18 "



12,0 W/m
3,7 W/ft
7,5 × 4,7 mm
0,29 × 0,19 "



TOOL-N Top Bend



Body Corpo		
Flexible Strip LED Top Bend		
Strip LED flessibile Top Bend		
Fastening	Double-sided tape	Nastro biadesivo
Fissaggio		
Max length (10% voltage drop): 10000 mm • 394,0 "		
Lunghezza massima (Perdita di tensione del 10%): 10000 mm		
Listings and marks		
Certificazioni e marchi	CE UK CA CULUS LISTED IP65 F ✓ RoHS	

Light Luce		
Light source	280 LED/m • 85 LED/ft	280 LED/m • 85 LED/ft
Sorgente luminosa		
Power consumption	6,0 W/m • 1,8 W/ft	12,0 W/m • 3,7 W/ft
Consumo energia		
CCT K	● 3000 K ● 4000 K	● 3000 K ● 4000 K
CRI	Min 90	Min 90
Delivered lumen output	90 lm/W 540 lm/m • 165 lm/ft	85 lm/W 1020 lm/m • 311 lm/ft
Flusso luminoso emesso		
● 3000 K		
Input voltage	24 V DC	24 V DC
Tensione di ingresso		


TOOL-N Top Bend

Dimensions Dimensioni



Scale/Scala 1:1

Curvature radius Raggio di curvatura

6,0 W/m • 1,8 W/ft

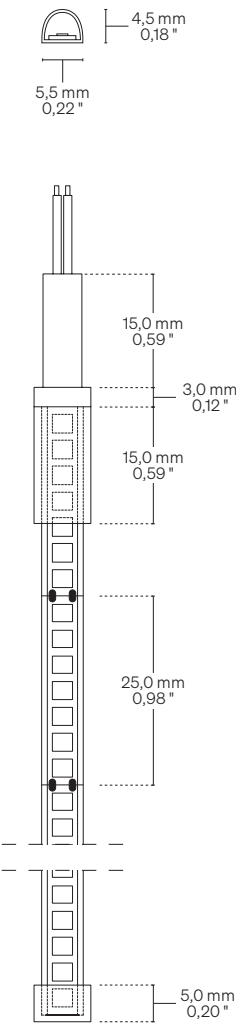


12,0 W/m • 3,7 W/ft

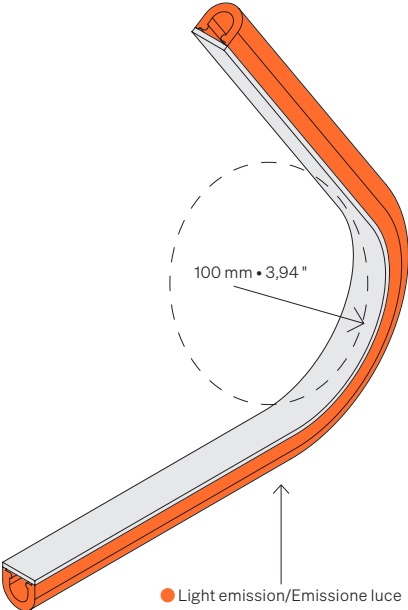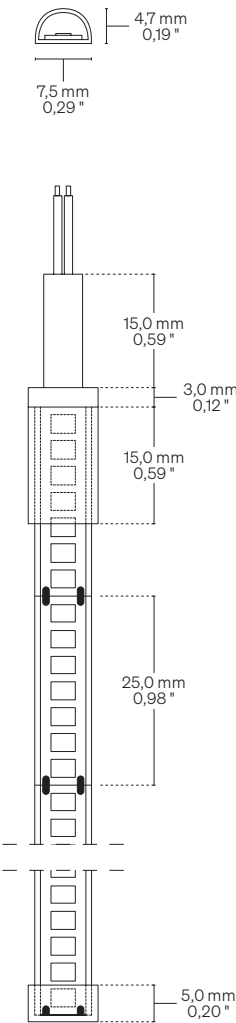


Direction of bending Senso di curvatura

OK Orange zone → Light emission
Zona arancio → Emissione luce

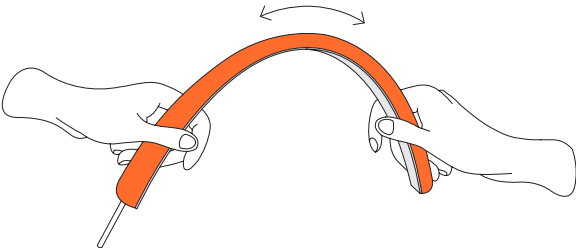

NO Orange zone → Light emission
Zona arancio → Emissione luce

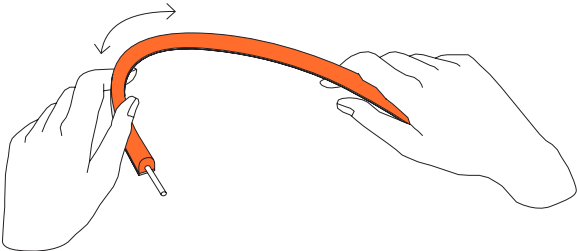

TOOL-N Top Bend

Code for customised order Codice per ordine su misura



Basic code Codice base	• TONTB2806	TOOL-N Top Bend 280 LED/m • 85 LED/ft 6,0 W/m • 1,8 W/ft IP65	
	• TONTB28012	TOOL-N Top Bend 280 LED/m • 85 LED/ft 12,0 W/m • 3,7 W/ft IP65	
CCT K CCT K	• 30	• 3000 K	
	• 40	• 4000 K	
Order length Lunghezza ordinabile	• --	Specify the size Specificare la misura	

Order example Esempio ordine	• TONTB2806 30 • 0,32	TOOL-N Top Bend, 280 LED/m • 85 LED/ft, 6,0 W/m • 1,8 W/ft, Warm White 3000 • 0,32 m	
		TOOL-N Top Bend, 280 LED/m, 6,0 W/m, Warm White 3000 • 0,32 m	

Code for coil Codice ordine per bobina



Basic code Codice base	• RTONTB2806	TOOL-N Top Bend Coil/Bobina 10 m • 32,81 ft 280 LED/m • 85 LED/ft 6,0 W/m • 1,8 W/ft IP65	
	• RTONTB28012	TOOL-N Top Bend Coil/Bobina 10 m • 32,81 ft 280 LED/m • 85 LED/ft 12,0 W/m • 3,7 W/ft IP65	
CCT K CCT K	• 30	• 3000 K	
	• 40	• 4000 K	

Order example Esempio ordine	• RTONTB2806 30	TOOL-N Top Bend Coil 10 m • 32,81 ft reel, 280 LED/m • 85 LED/ft, 6,0 W/m • 1,8 W/ft, Warm White 3000	
		TOOL-N Top Bend Bobina 10 m, 280 LED/m, 6,0 W/m, Warm White 3000	

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.