

# TOOL-N Top Bend


**280 LED/m • 85 LED/ft**  
6,0 W/m • 1,8 W/ft  
**280 LED/m • 85 LED/ft**  
12,0 W/m • 3,7 W/ft




**6,0 W/m**  
**1,8 W/ft**  
5,5 × 4,5 mm  
0,22 × 0,18 "



**12,0 W/m**  
**3,7 W/ft**  
7,5 × 4,7 mm  
0,29 × 0,19 "

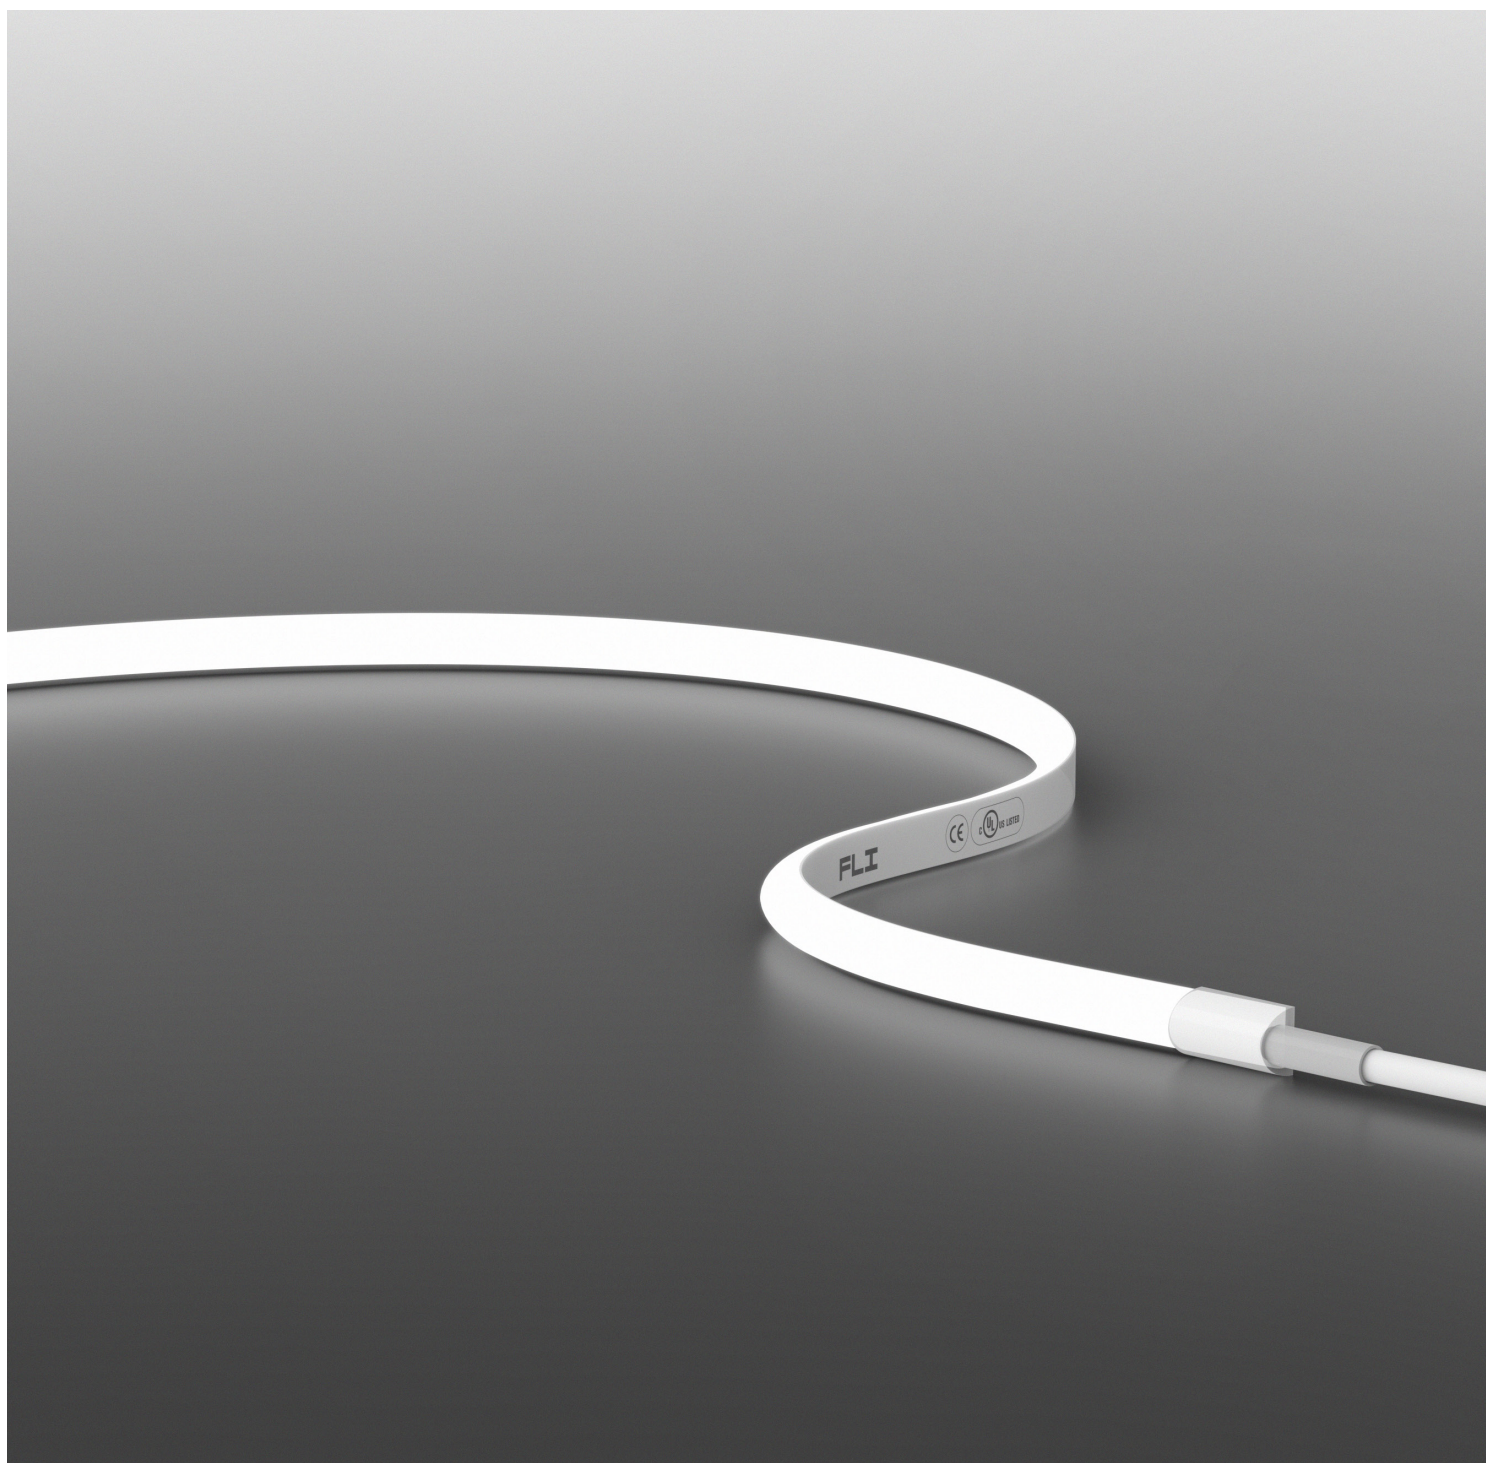

# TOOL-N Top Bend

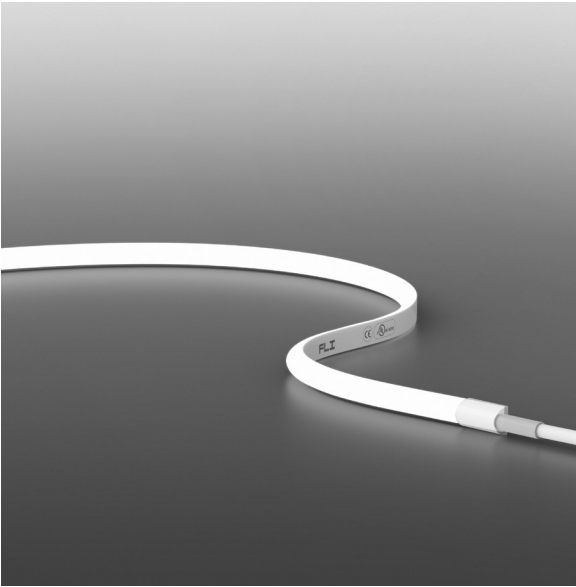

Vertical Bending



Horizontal Bending

## Body Corpo

### Flexible Strip LED Top Bend

Strip LED flessibile Top Bend

#### Fastening

Fissaggio

Double-sided tape

Nastro biadesivo

**Max length (10% voltage drop): 10000 mm • 394,0 "**

Lunghezza massima (Perdita di tensione del 10%): 10000 mm

#### Listings and marks

Certificazioni e marchi



## Light Luce

### Light source

Sorgente luminosa

280 LED/m • 85 LED/ft

280 LED/m • 85 LED/ft

### Power consumption

Consumo energia

6,0 W/m • 1,8 W/ft

12,0 W/m • 3,7 W/ft

### CCT K

● 3000 K  
● 4000 K

● 3000 K  
● 4000 K

### CRI

Min 90

Min 90

### Delivered lumen output

Flusso luminoso emesso  
● 3000 K

90 lm/W  
540 lm/m • 165 lm/ft

85 lm/W  
1020 lm/m • 311 lm/ft

### Input voltage

Tensione di ingresso

24 V DC


24 V DC

# TOOL-N Top Bend


Dimensions Dimensioni

Scale/Scala 1:1


6,0 W/m • 1,8 W/ft

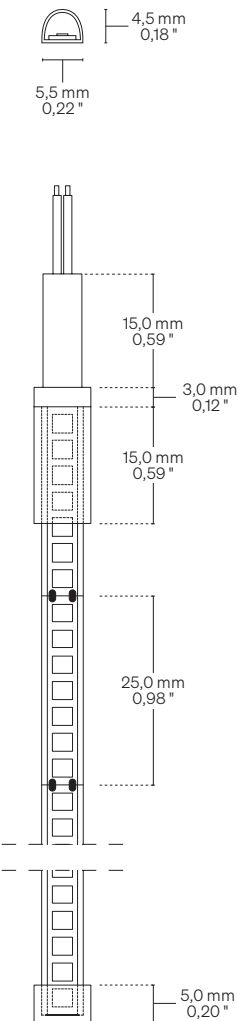


12,0 W/m • 3,7 W/ft

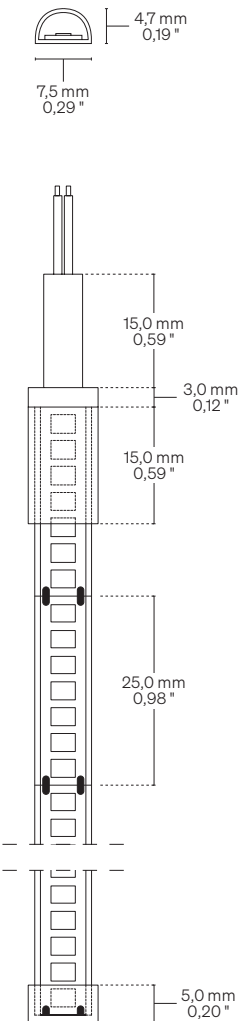

Curvature radius Raggio di curvatura

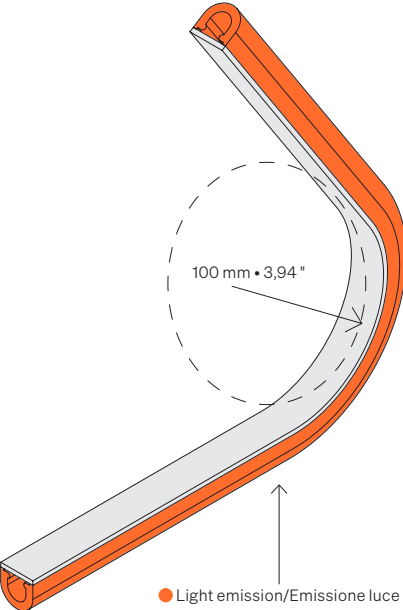

Direction of bending Senso di curvatura

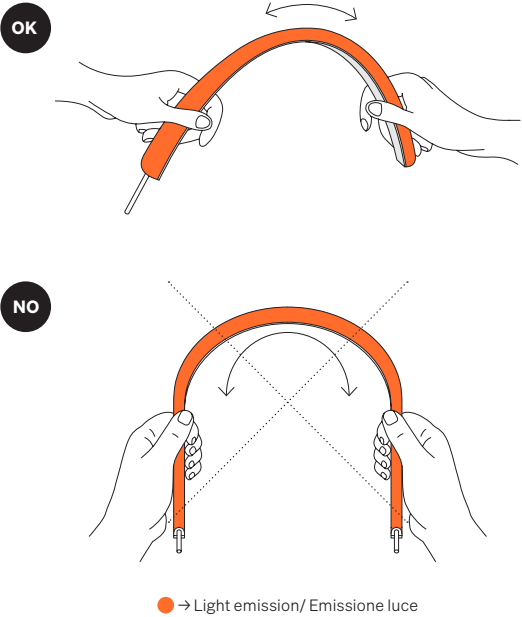

# TOOL-N Top Bend

## Code for customised order Codice per ordine su misura



|                                             |                              |                                                                                            |  |
|---------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------|--|
| <b>Basic code</b><br>Codice base            | • <b>TONTB2806</b>           | TOOL-N Top Bend<br>280 LED/m • 85 LED/ft<br>6,0 W/m • 1,8 W/ft<br>IP65                     |  |
|                                             | • <b>TONTB28012</b>          | TOOL-N Top Bend<br>280 LED/m • 85 LED/ft<br>12,0 W/m • 3,7 W/ft<br>IP65                    |  |
| <b>CCT K</b><br>CCT K                       | • <b>30</b>                  | • 3000 K                                                                                   |  |
|                                             | • <b>40</b>                  | • 4000 K                                                                                   |  |
| <b>Order length</b><br>Lunghezza ordinabile | • --                         | Specify the size<br>Specificare la misura                                                  |  |
| <div></div>                                 |                              |                                                                                            |  |
| <b>Order example</b><br>Esempio ordine      | • <b>TONTB2806 30 • 0,32</b> | TOOL-N Top Bend, 280 LED/m • 85 LED/ft,<br>6,0 W/m • 1,8 W/ft, Warm White 3000 •<br>0,32 m |  |
|                                             |                              | TOOL-N Top Bend, 280 LED/m, 6,0 W/m,<br>Warm White 3000 • 0.32 m                           |  |

## Code for coil Codice ordine per bobina



|                                        |                             |                                                                                                             |  |
|----------------------------------------|-----------------------------|-------------------------------------------------------------------------------------------------------------|--|
| <b>Basic code</b><br>Codice base       | • <b>R10TON<br/>TB2806</b>  | TOOL-N Top Bend<br>Coil/Bobina 10 m • 32,81 ft<br>280 LED/m • 85 LED/ft<br>6,0 W/m • 1,8 W/ft<br>IP65       |  |
|                                        | • <b>R10TON<br/>TB28012</b> | TOOL-N Top Bend<br>Coil/Bobina 10 m • 32,81 ft<br>280 LED/m • 85 LED/ft<br>12,0 W/m • 3,7 W/ft<br>IP65      |  |
| <b>CCT K</b><br>CCT K                  | • <b>30</b>                 | • 3000 K                                                                                                    |  |
|                                        | • <b>40</b>                 | • 4000 K                                                                                                    |  |
| <hr/>                                  |                             |                                                                                                             |  |
| <b>Order example</b><br>Esempio ordine | • <b>R10TONTB2806 30</b>    | TOOL-N Top Bend Coil 10 m • 32,81 ft reel,<br>280 LED/m • 85 LED/ft, 6,0 W/m • 1,8 W/ft,<br>Warm White 3000 |  |
|                                        |                             | TOOL-N Top Bend Bobina 10 m,<br>280 LED/m, 6,0 W/m, Warm White 3000                                         |  |

# Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.