

Play Surface Semi Recessed



Play Surface Semi Recessed



Diffusing filter



Honeycomb

Body Corpo

Adjustable aluminium spot

Spot in alluminio orientabile

Fastening Fissaggio	With magnets + Flange (NO TRIM)	Con magneti + Flangia (NO TRIM)
Optics Ottica	14° • 20° • 32° • 52°	14° • 20° • 32° • 52°
Wiring set Cavo alimentazione	1500 mm • 59,06 "	1500 mm
Finishing Finitura	☐ White varnish ☐ Vernice bianca	

Listings and marks

Certificazioni e marchi



Where we produce

Dove produciamo

Made in Italy

LED (See page CRI)

LED (Vedi pagina CRI)



Light Luce

Light source Sorgente luminosa	LED ↓ Series/In serie V CC: 6,0 W @ 500mA	LED ↓ Parallel/In parallelo V DC: 6,4 W	6,0 W - TW - Tunable White
CCT K	☐ 2700 K ☐ 3000 K ☐ 3500 K ☐ 4000 K ☐ 5000 K	☐ 2700 K ☐ 3000 K ☐ 3500 K ☐ 4000 K ☐ 5000 K	☐ 2700 - 5700 K
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 92 100 2	Min 90 Min 80 92 100 2	Min 90 Min 80 92 100 2
Delivered lumen output Flusso luminoso emesso ☐ 3000 K	510 lm @ 500mA	510 lm @ 500mA	250 lm @ 500mA - 2700 K 320 lm @ 500mA - 5000 K
Input voltage/current Tensione/Corrente di ingresso	12 V CC @ 500mA	24 V DC	12 V CC @ 500mA


Play Surface Semi Recessed



Play Surface Semi Recessed



Dimensions Dimensioni

Scale/Scala 1:1

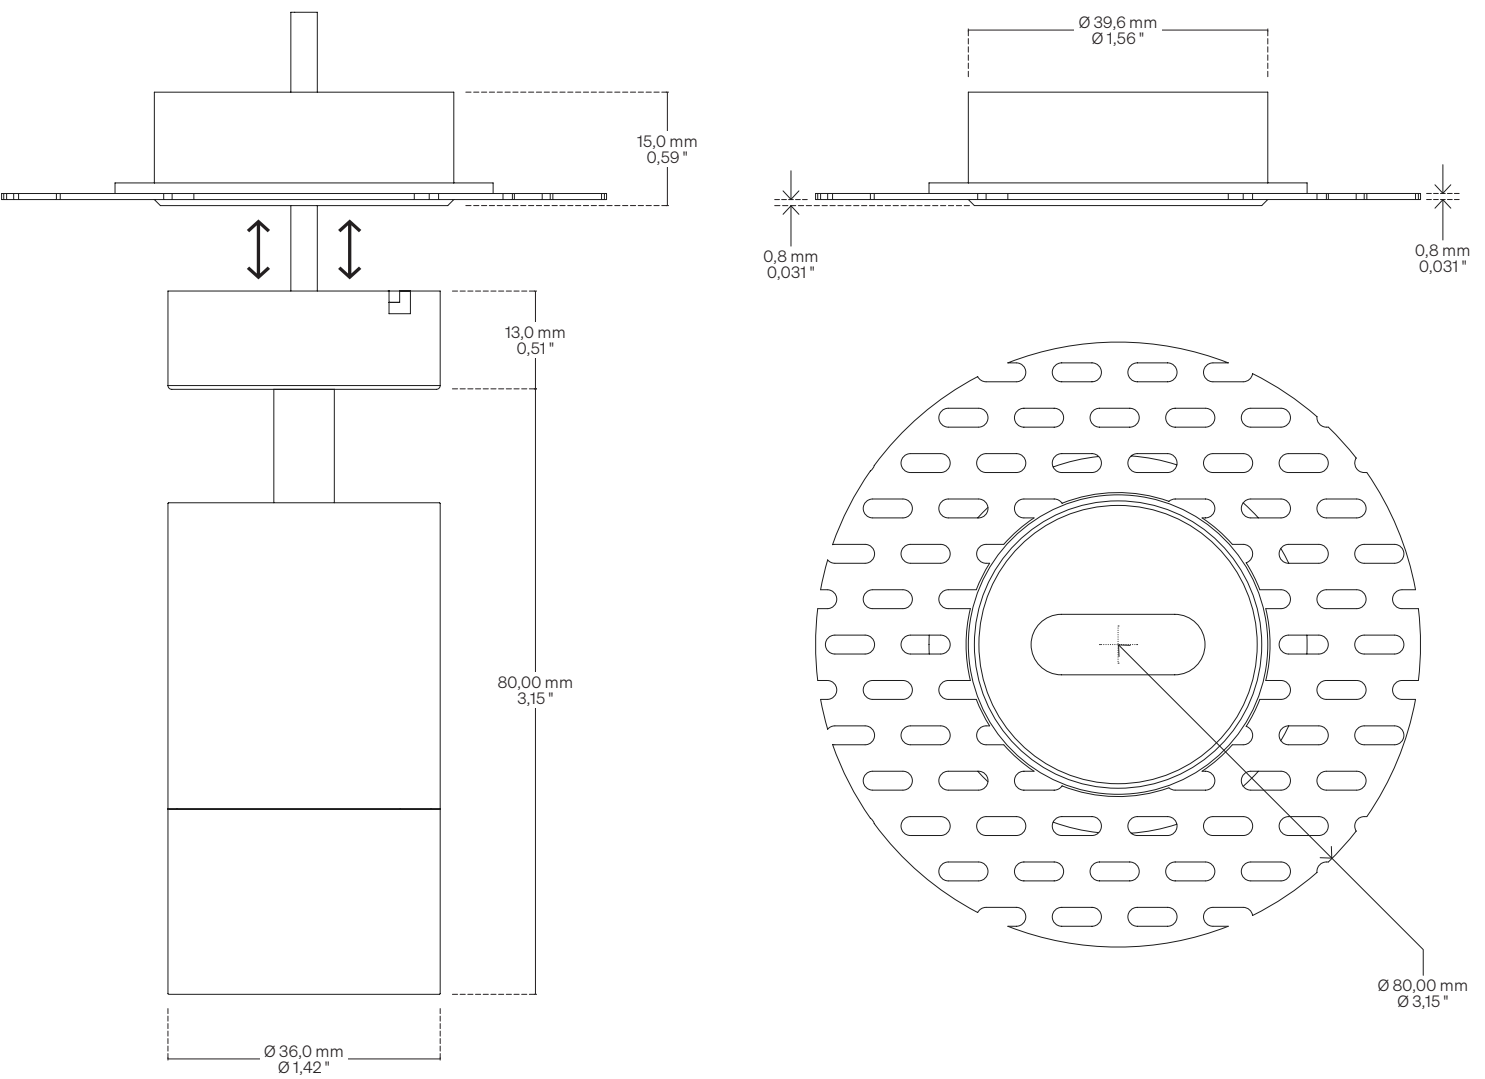

Fastening options Opzioni di fissaggio

Hole size: Ø 51,0 mm • Ø 2,00 "
Dimensione foro: Ø 51,0 mm

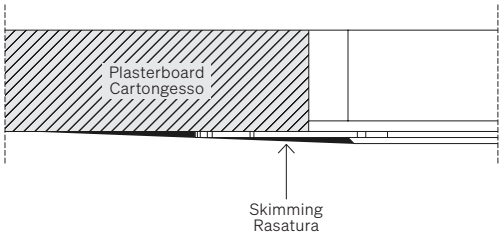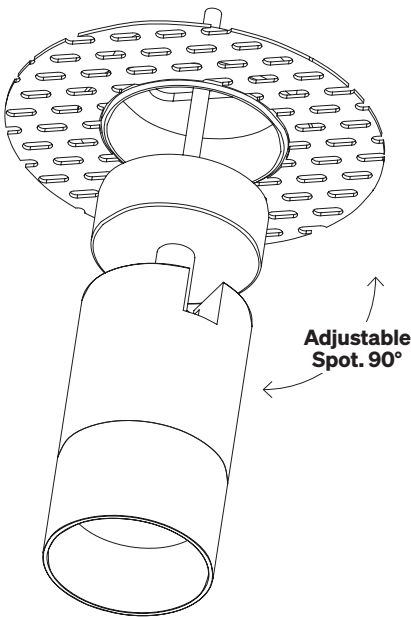

Play Surface Semi Recessed

Order code Codice ordine		
Basic code Codice base	PSSL	Play Surface Semi Recesses
CCT K CCT K	WW27 WW30 NW35 NW CW TW	2700 K 3000 K 3500 K 4000 K 5000 K 2700 - 5700 K
Optics Ottica	14 20 32 52	14° 20° 32° 52°
Fastening options Opzioni di fissaggio	MF	With magnets + Flange Con magneti + Flangia
Accessories Accessori	DF HO	Diffusing filter Filtro diffondente Honeycomb
Accessories Accessori	DRPWM DRDC	Converter 24 V DC Convertitore 24 V DC Potential different dimmer Convertitore 24 V DC Dimmerabile in tensione
Order example Esempio ordine	PSSL WW27 14 MF DF DRPWM Play Surface Semi Recessed, Warm White 2700, 14° Optic, With magnets + Flange, Diffusing filter, Converter 24 V DC Play Surface Semi Recessed, Warm White 2700, Ottica 14°, Con magneti + Flangia, Filtro diffondente, Convertitore 24 V DC	

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.

CRI Typical* CRI Tipici*




R9080 • 2 SDCM

Power LED

●

3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

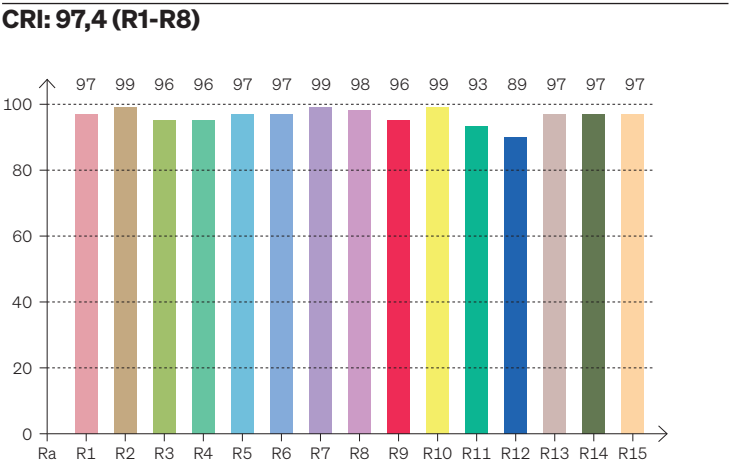

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,4	97	99	96	96	97	97	99	98	96	99	93	89	97	97	97

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3067 K	97,4	96,3	95,8	102,3	96,3	0,431	0,399	0,249	0,346	-0,0010