

# LLS • Oval

**182 LED/m • 55 LED/ft**

9,5 W/m • 2,9 W/ft


**182 LED/m • 55 LED/ft**

15,7 W/m • 4,8 W/ft


**182 LED/m • 55 LED/ft**

19,6 W/m • 6,0 W/ft

**OVAL** → (70° × 25°)



**12,8 × 16,0 mm**  
**0,50 × 0,63 "**

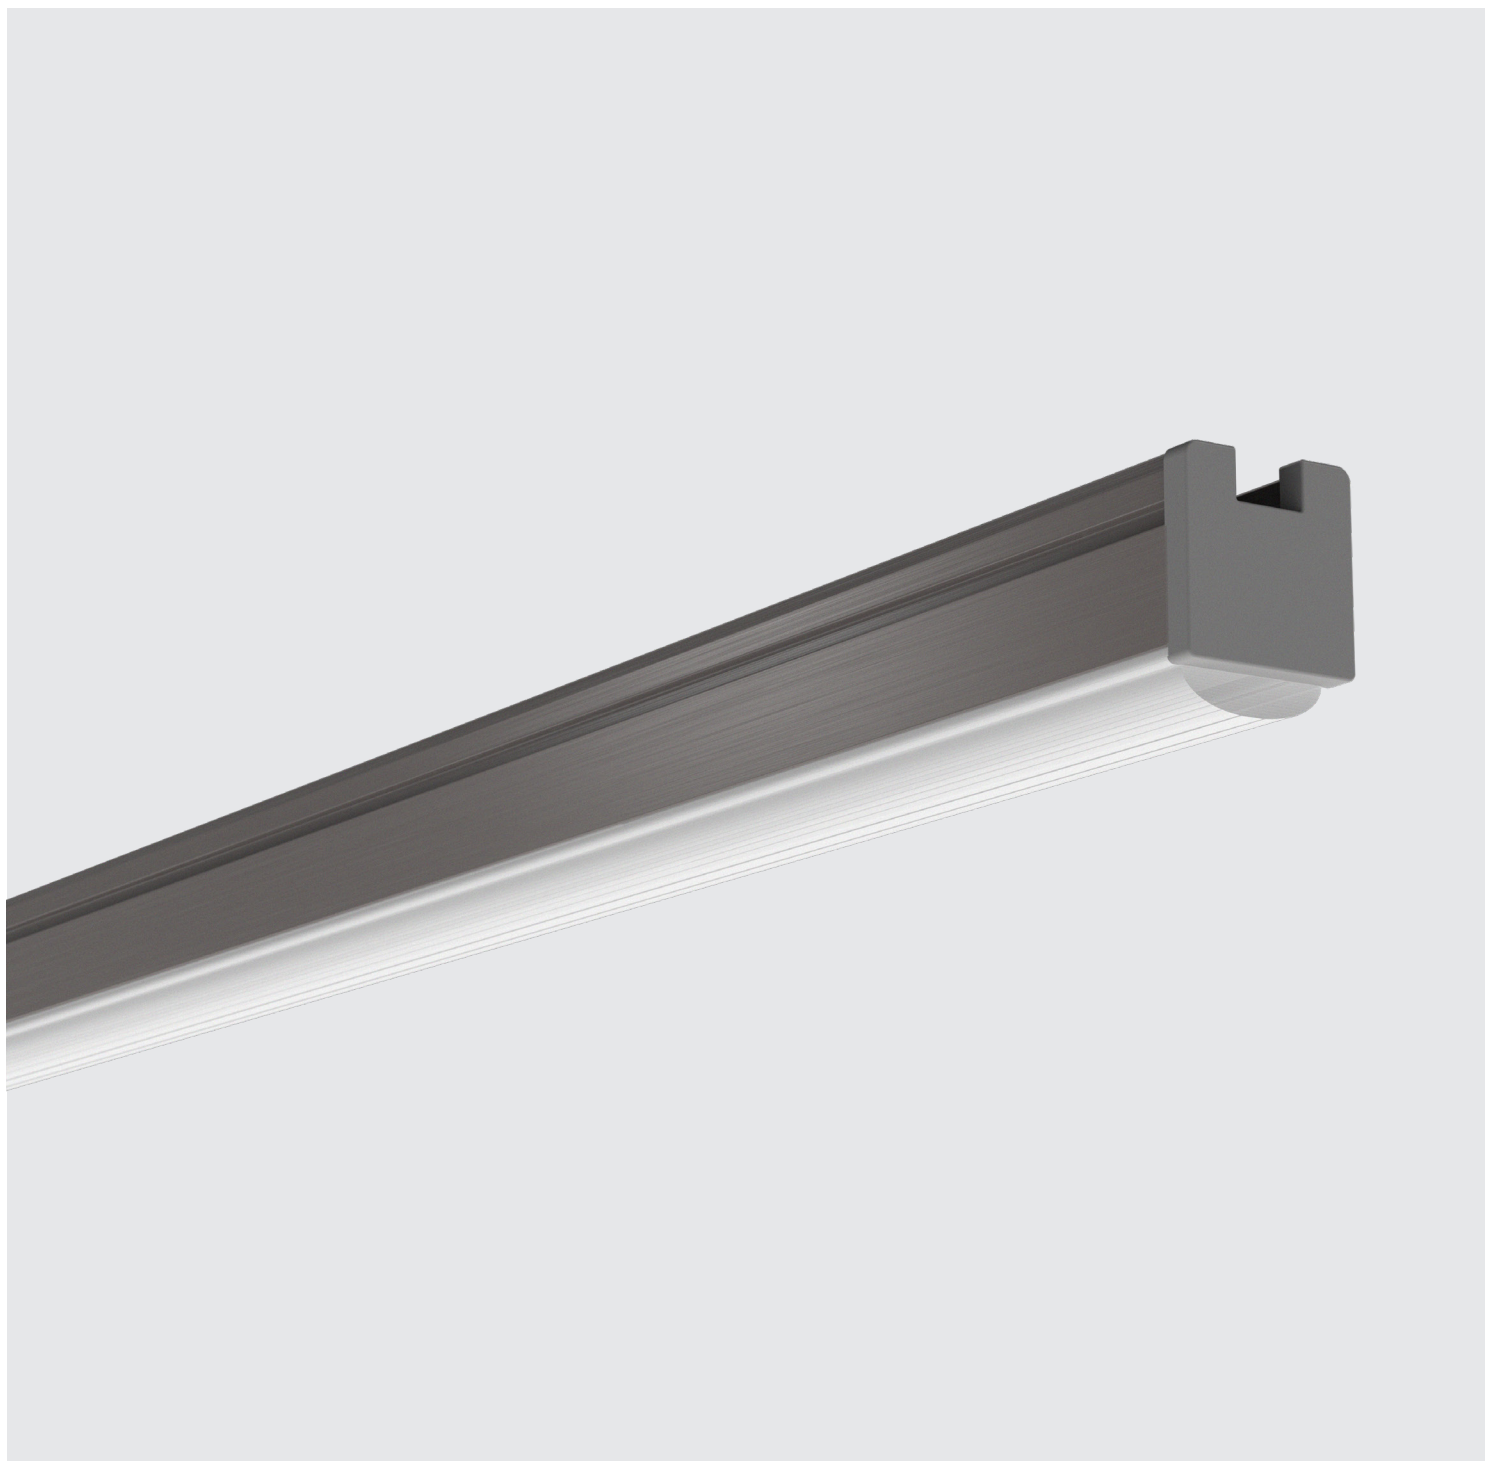

# LLS • Oval



## Body Corpo

### Symmetrical linear profile

Profilo lineare simmetrico

<b>Fastening</b> Fissaggio	Caps + Magnets Caps + Steel clips Caps + Adjustable brackets Tappi + Magneti Tappi + Clip in acciaio Tappi + Staffe orientabili
-------------------------------	--

<b>Screen</b> Schermo	OVAL (70° × 25°)
--------------------------	------------------

<b>Wiring set</b> Cavo alimentazione	2000 mm • 78,74 "
---	-------------------

<b>Ordering length</b> Lunghezza ordinabile	Up to 3000 mm • 118,10 " Fino a 3000 mm
--	--

<b>Finishing</b> Finitura	● Grey anodized (Standard) → On request other finishes ● Anodica grigia (Standard) → Su richiesta altre finiture
------------------------------	---

### Listings and marks

Certificazioni e marchi



### Where we produce

Dove produciamo

Made in Italy

### LED (See page 20)

LED (Vedi pagina 20)



## Light Luce



### OVAL (70° × 25°)





OVAL (70° × 25°)

<b>Light source</b> Sorgente luminosa	182 LED/m • 55 LED/ft	182 LED/m • 55 LED/ft	182 LED/m • 55 LED/ft
<b>Power consumption</b> Consumo energia	9,5 W/m • 2,9 W/ft	15,7 W/m • 4,8 W/ft	19,6 W/m • 6,0 W/ft
<b>CCT K</b>	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000	● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3	Min 90 Min 50 92 100 3
<b>Delivered lumen output</b> Flusso luminoso emesso ● 3000 K	↓ <b>Oval (70° × 25°)</b> – 153 lm/W 1454 lm/m • 443 lm/ft	↓ <b>Oval (70° × 25°)</b> – 150 lm/W 2355 lm/m • 718 lm/ft	↓ <b>Oval (70° × 25°)</b> – 149 lm/W 2915 lm/m • 889 lm/ft
<b>Input voltage</b> Tensione di ingresso	24 V DC	24 V DC	24 V DC



**TAM** Caps + Magnets  
Tappi + Magneti

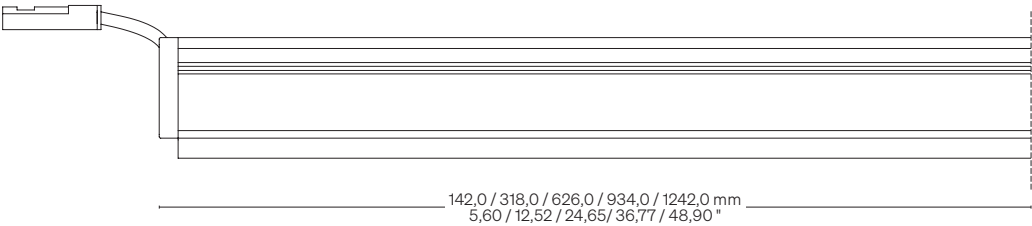


**TAC** Caps + Steel clips  
Tappi + Clip in acciaio

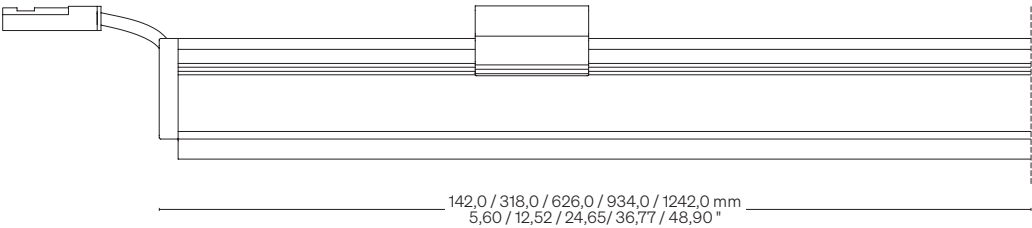


**TCA** Caps + Adjustable brackets  
Tappi + Staffe orientabili

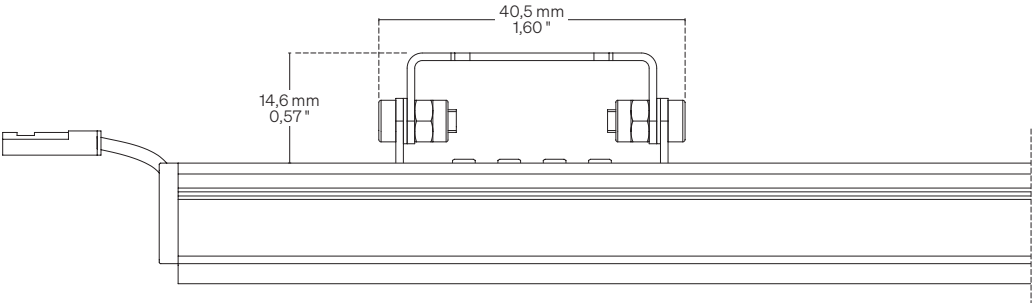


↓ Curved Louvers




15,7 mm  
0,62"

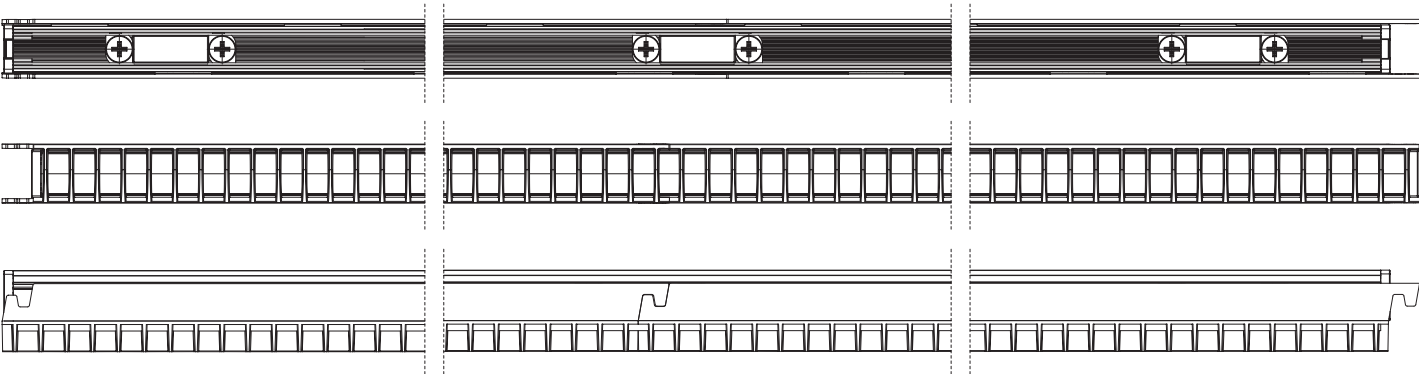

↓ Straight Louvers






15,7 mm  
0,62"

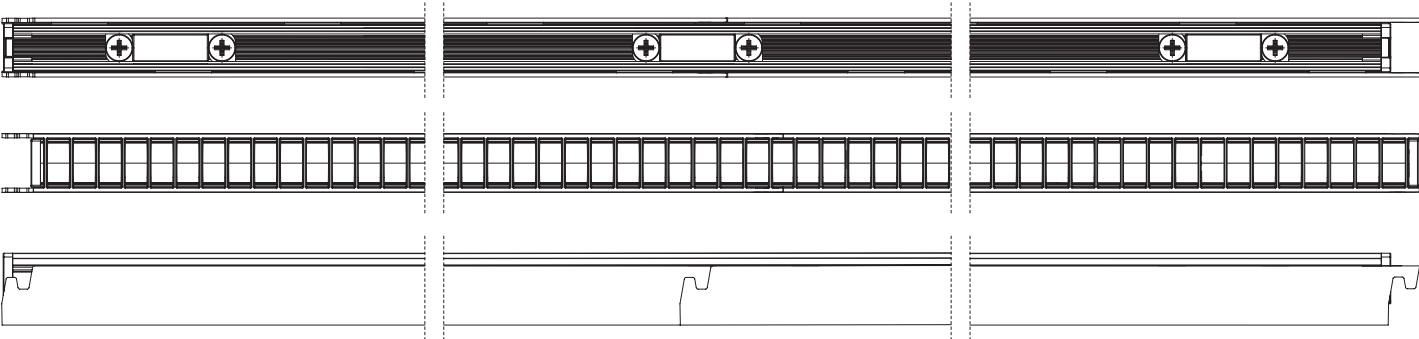

# LLS • Oval

Wall cover Copertura murale

Scale/Scala 1:1

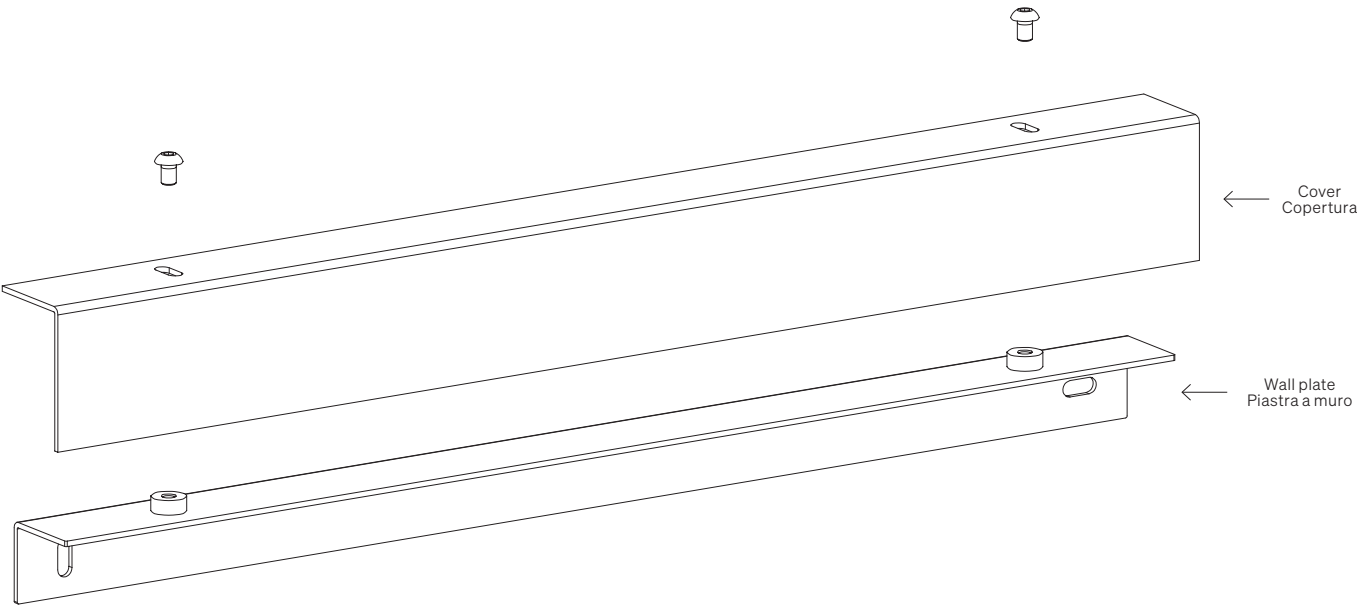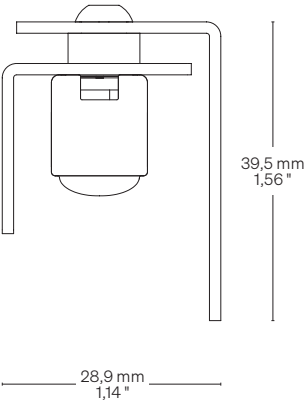


# LLS • Oval

## Fastening options Opzioni di fissaggio


**TAM**

Caps + Magnets  
Tappi + Magneti

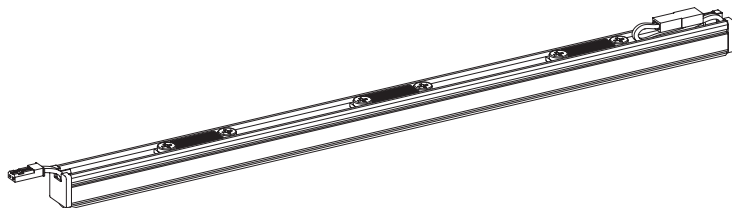


**TAC**

Caps + Steel clips  
Tappi + Clip in acciaio

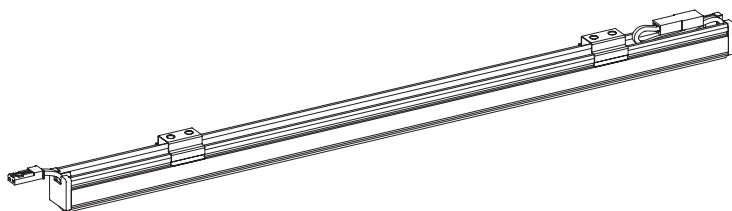

**TCA**

Caps + Adjustable brackets  
Tappi + Staffe orientabili

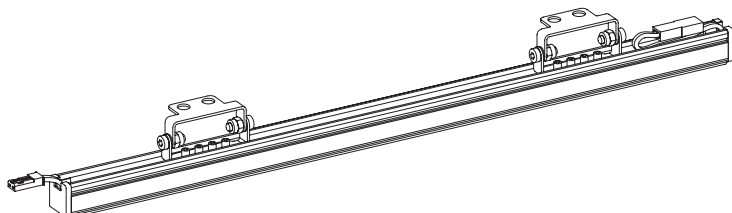

## Order code Codice ordine

### Basic code

Codice base

• **LLS** LLS (Lens Light System)

### Light source

Sorgente luminosa

• **1829** 182 LED/m • 55 LED/ft  
9,5 W/m • 2,9 W/ft  
• **18215** 182 LED/m • 55 LED/ft  
15,7 W/m • 4,8 W/ft  
• **18220** 182 LED/m • 55 LED/ft  
19,6 W/m • 6,0 W/ft

### CCT K

CCT K

• **18** 1800 K  
• **20** 2000 K  
• **22** 2200 K  
• **25** 2500 K  
• **27** 2700 K  
• **30** 3000 K  
• **35** 3500 K  
• **40** 4000 K  
• **50** 5000 K

### Fastening options

Opzioni di fissaggio

• **TAM** Caps + Magnets  
Tappi + Magneti  
• **TAC** Caps + Steel clips  
Tappi + Clip in acciaio  
• **TCA** Caps + Adjustable brackets  
Tappi + Staffe orientabili

### Screen

Schermo

• **7025** OVAL (70°×25°)

### Finishing

Finitura

• **01** Grey anodized  
Anodica grigia

### Accessories

Accessori

• **L** Louvers/Louvers  
• **W** Wall cover/Copertura murale

### Order example


Esempio ordine

• **LLS 142 1829 18 TAM 7025 01 L**

LLS, 142,0 mm • 5,60",  
182 LED/m • 55 LED/ft,  
9,5 W/m • 2,9 W/ft, Warm White 1800,  
Caps + Magnets, OVAL (70°×25°),  
Grey anodized, Louvers

LLS, 142,0 mm, 182 LED/m, 9,5 W/m,  
Warm White 1800, Tappi + Magneti,  
OVAL (70°×25°), Anodica grigia, Louvers

# CRI Typical\* CRI Tipici\*




R9050 – H6 • 3SDCM

High Efficacy

● 3000 K

\* Values taken from sample measurements  
\* Valori presi da misurazioni a campione

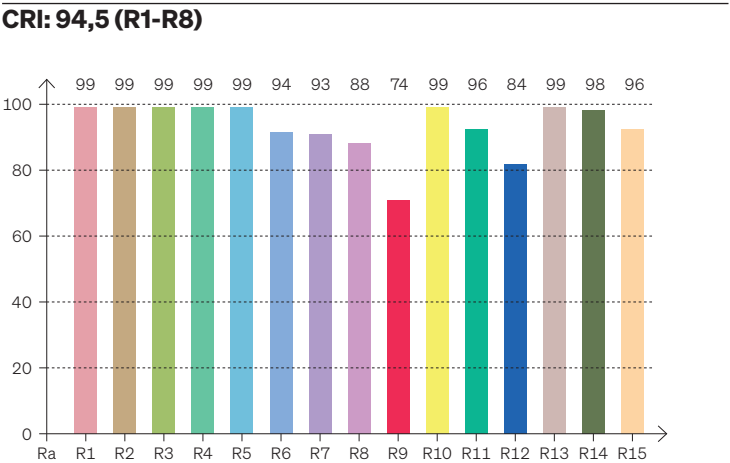

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,4	99	99	99	99	99	94	93	88	74	99	96	84	99	98	96

### Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3042 K	96,2	74,4	92,2	100,5	92,9	0,441	0,399	0,255	0,347	-0,0009




FULL SPECTRUM • 3SDCM

OPTISOLIS™

● 3000 K

\* Values taken from sample measurements  
\* Valori presi da misurazioni a campione

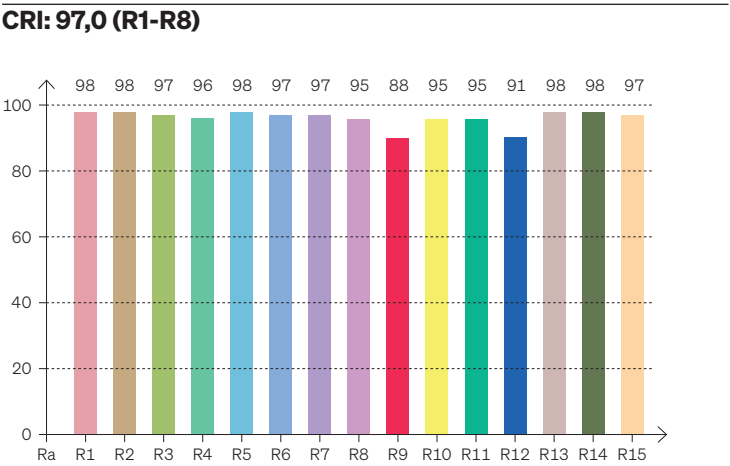

CRI Values Valori CRI

CCTK: ● 3000 K



CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,0	98	98	97	96	98	97	97	95	88	95	95	91	98	98	97

### Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3059 K	97,0	88,0	94,8	102,8	94,5	0,432	0,400	0,249	0,346	-0,0008

# LLS • Oval

Cable outlet Uscita cavi

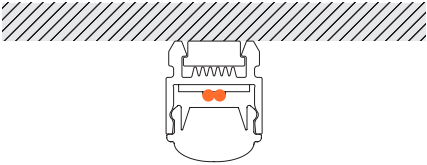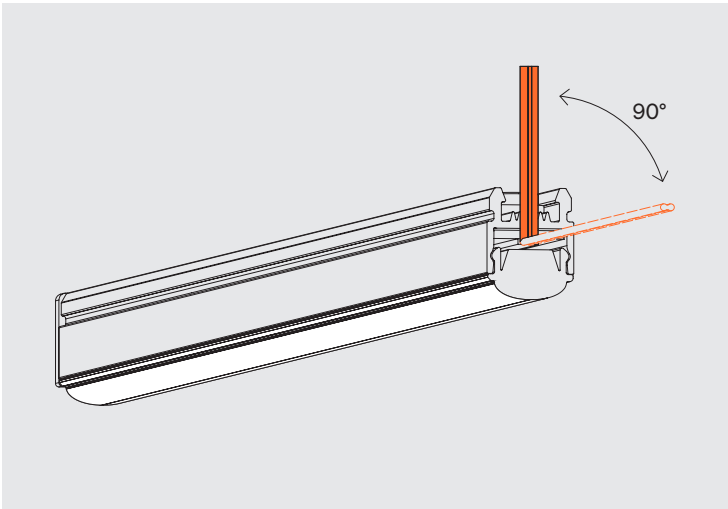

Scale/Scala 1:1



# Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.