

LLS • Oval

182 LED/m • 55 LED/ft

9,5 W/m • 2,9 W/ft


182 LED/m • 55 LED/ft

15,7 W/m • 4,8 W/ft


182 LED/m • 55 LED/ft

19,6 W/m • 6,0 W/ft

OVAL → (70° × 25°)





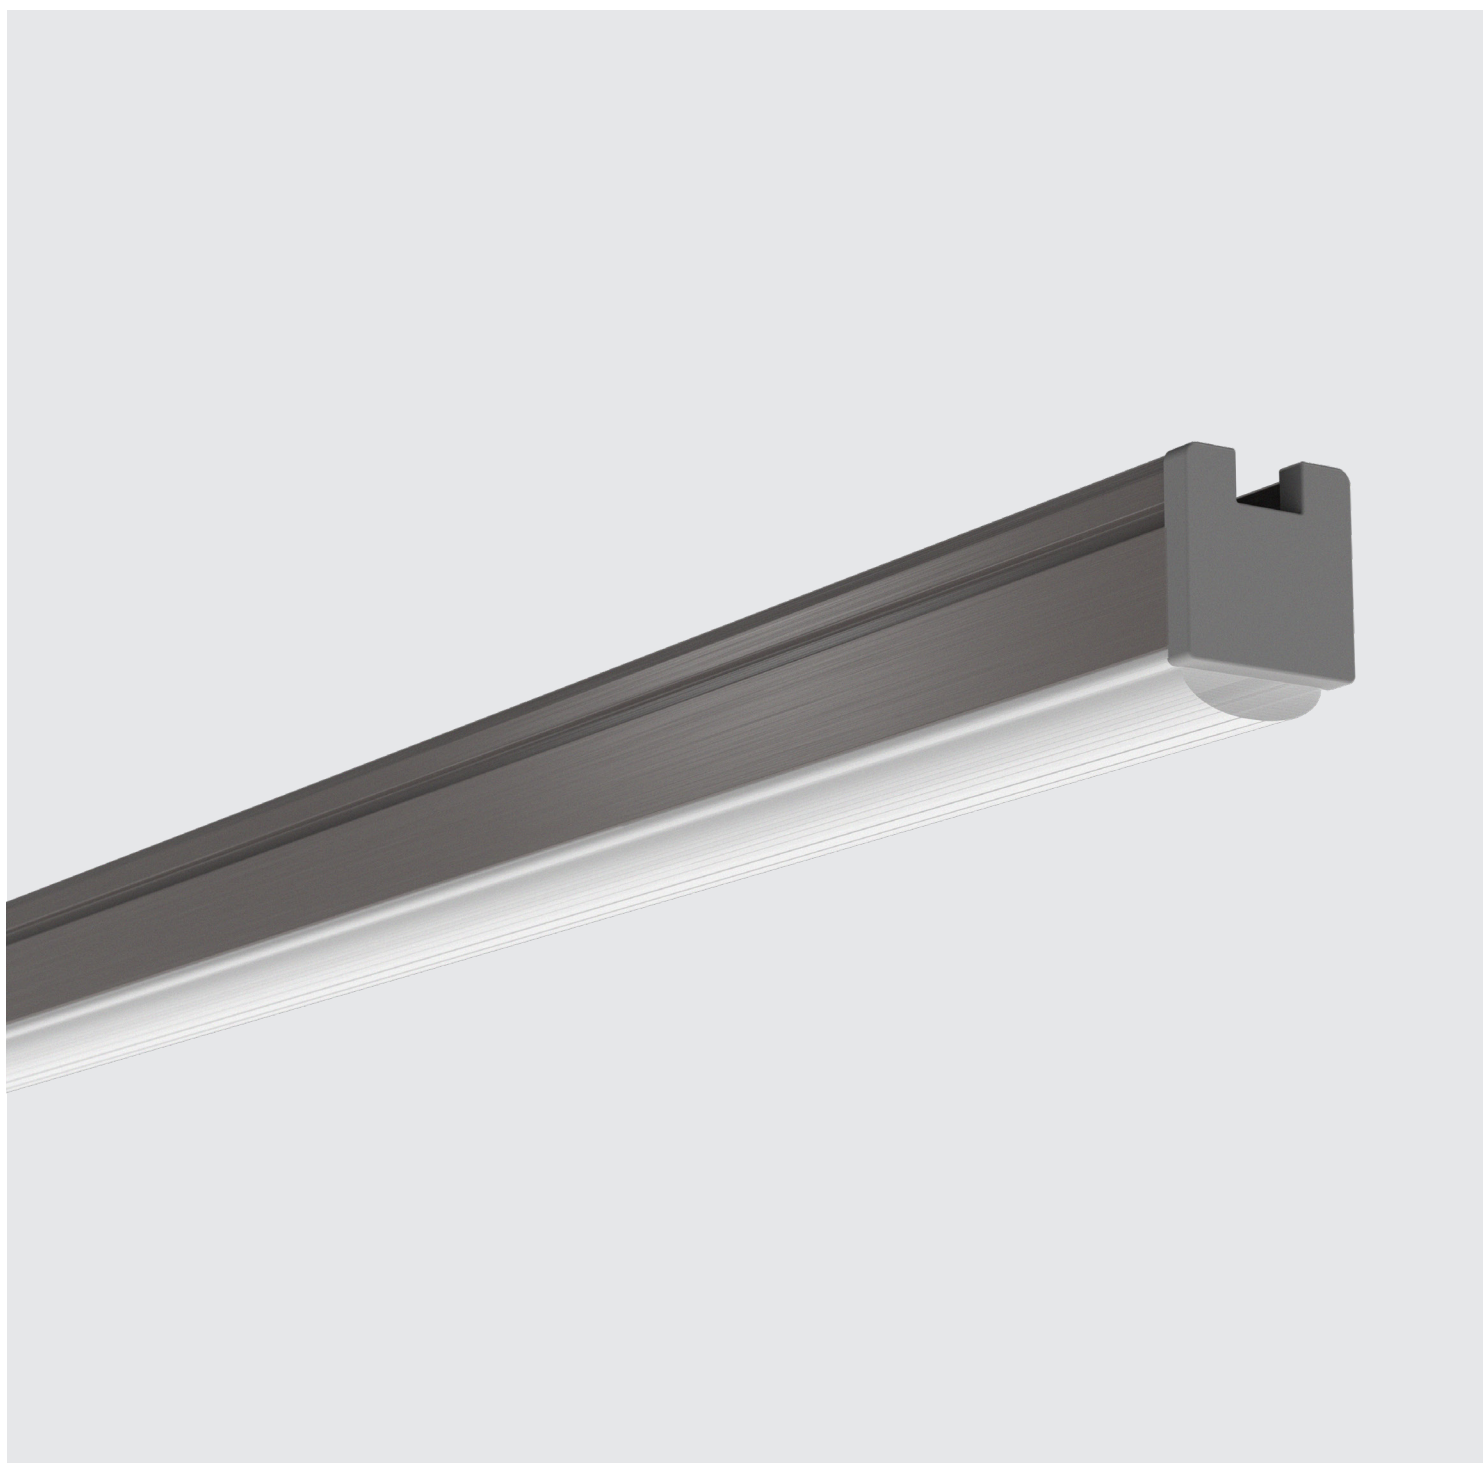






12,8 × 16,0 mm
0,50 × 0,63 "




LLS • Oval





| | |
|---|---|
| Body Corpo | |
| Symmetrical linear profile Profilo lineare simmetrico | |
| Fastening Fissaggio | Caps + Magnets Caps + Steel clips Caps + Adjustable brackets Tappi + Magneti Tappi + Clip in acciaio Tappi + Staffe orientabili |
| Screen Schermo | OVAL (70° × 25°) |
| Wiring set Cavo alimentazione | 2000 mm • 78,74 " |
| Ordering length Lunghezza ordinabile | Up to 3000 mm • 118,10 " Fino a 3000 mm |
| Finishing Finitura | ● Grey anodized (Standard) → On request other finishes ● Anodica grigia (Standard) → Su richiesta altre finiture |
| Listings and marks Certificazioni e marchi |       |
| Where we produce Dove produciamo | Made in Italy |
| LED (See page 20) LED (Vedi pagina 20) |    |



Light Luce

| | | | | |
|---|---|--|--|--|
| OVAL (70° × 25°) | Light source Sorgente luminosa | 182 LED/m • 55 LED/ft | 182 LED/m • 55 LED/ft | 182 LED/m • 55 LED/ft |
|  | Power consumption Consumo energia | 9,5 W/m • 2,9 W/ft | 15,7 W/m • 4,8 W/ft | 19,6 W/m • 6,0 W/ft |
| CCT K | | ● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000 | ● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000 | ● 1800 ● 2500 ● 3500 ● 2000 ● 2700 ● 4000 ● 2200 ● 3000 ● 5000 |
| CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse | | Min 90 Min 50 92 100 3 | Min 90 Min 50 92 100 3 | Min 90 Min 50 92 100 3 |
| Delivered lumen output Flusso luminoso emesso ● 3000 K | | ↓ Oval (70°×25°) – 153 lm/W 1454 lm/m • 443 lm/ft | ↓ Oval (70°×25°) – 150 lm/W 2355 lm/m • 718 lm/ft | ↓ Oval (70°×25°) – 149 lm/W 2915 lm/m • 889 lm/ft |
| Input voltage Tensione di ingresso | | 24 V DC | 24 V DC | 24 V DC |



TAM Caps + Magnets
Tappi + Magneti

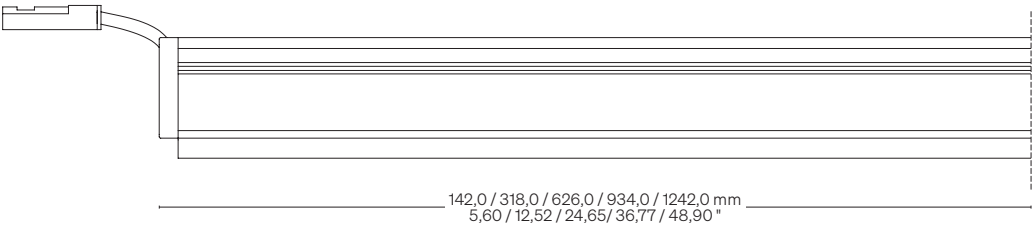


TAC Caps + Steel clips
Tappi + Clip in acciaio

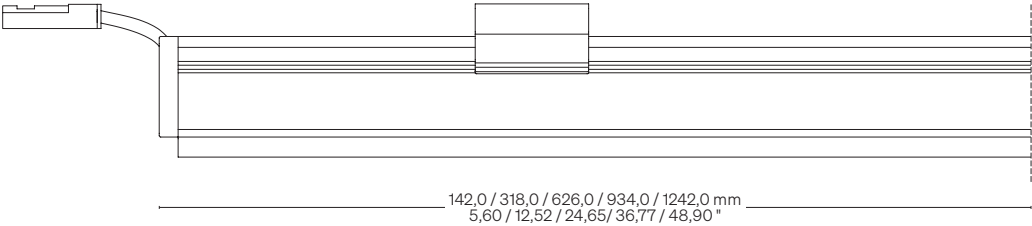


TCA Caps + Adjustable brackets
Tappi + Staffe orientabili

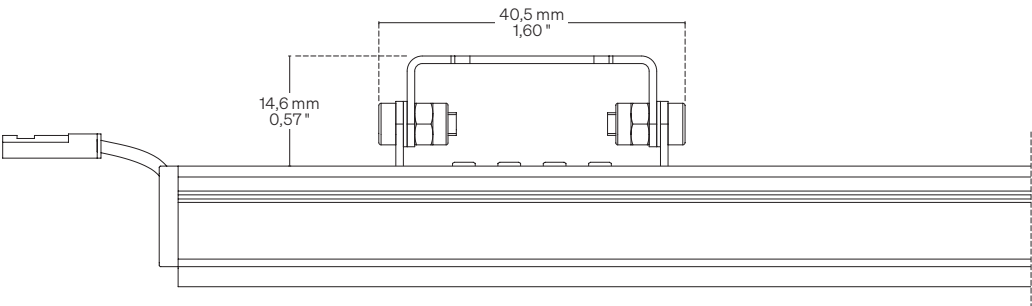


LC Curved Louvers




15,7 mm
0,62"



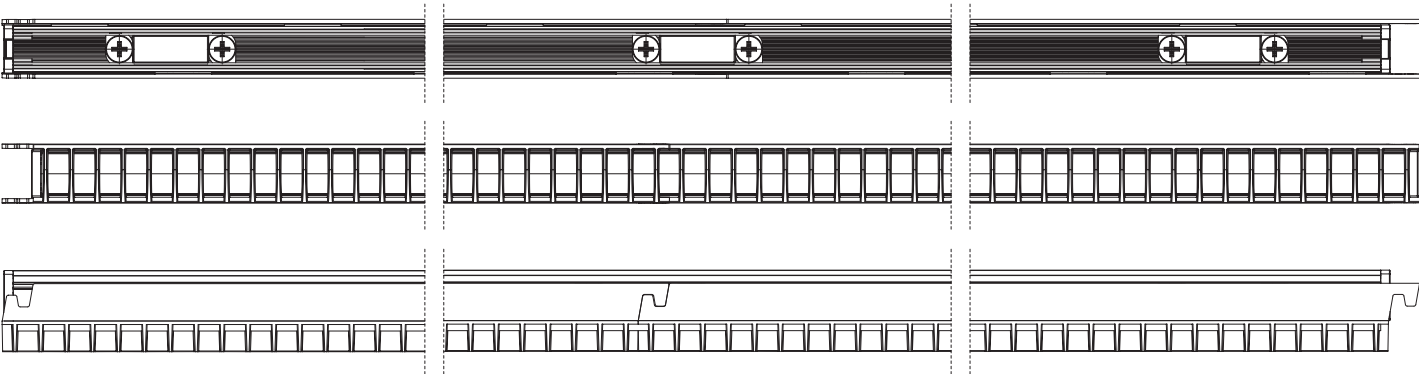


LS Straight Louvers






15,7 mm
0,62"

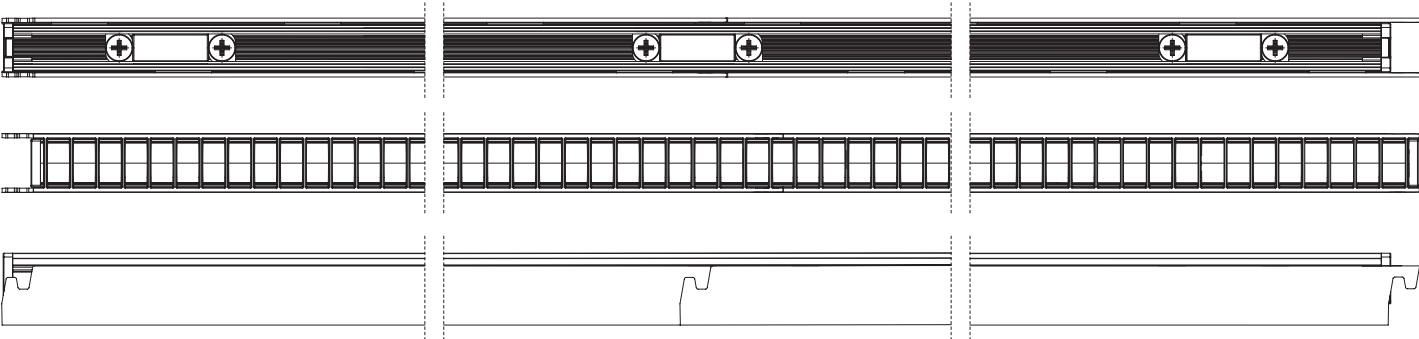

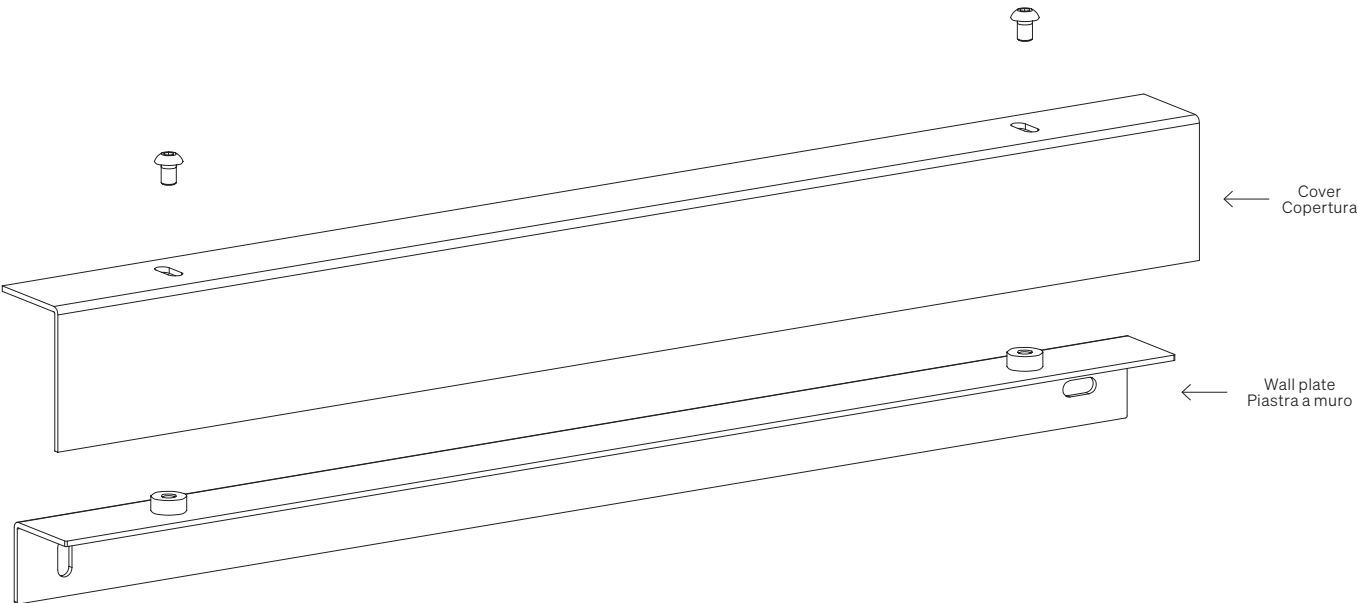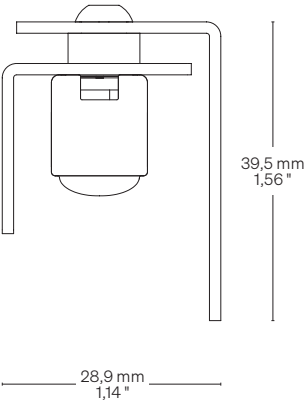


LLS • Oval

Fastening options Opzioni di fissaggio

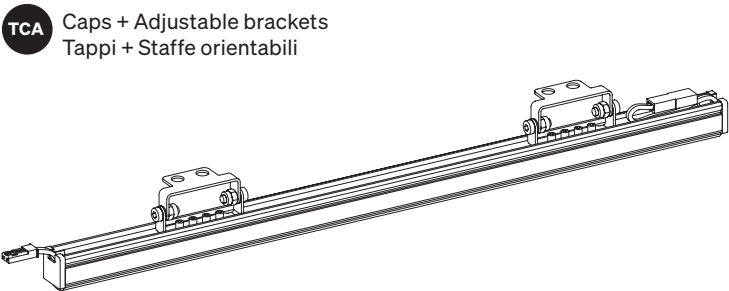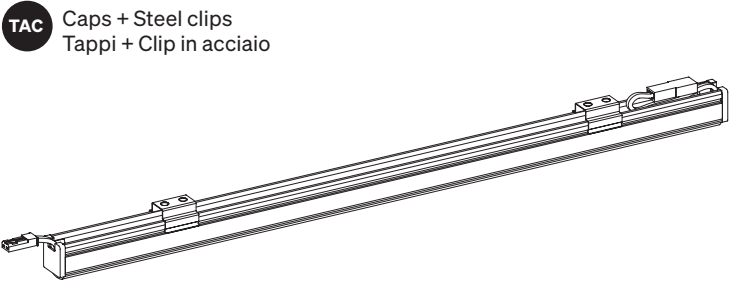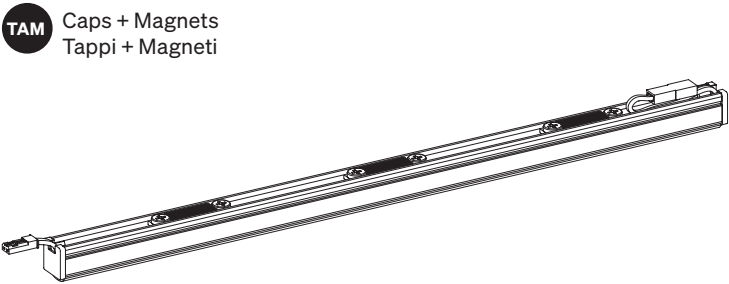

| Order code Codice ordine | | |
|---|----------------------------------|---|
| Basic code Codice base | • LLS | LLS (Lens Light System) |
| Light source Sorgente luminosa | • 1829 | 182 LED/m • 55 LED/ft 9,5 W/m • 2,9 W/ft |
| | • 18215 | 182 LED/m • 55 LED/ft 15,7 W/m • 4,8 W/ft |
| | • 18220 | 182 LED/m • 55 LED/ft 19,6 W/m • 6,0 W/ft |
| CCT K CCT K | • 18 | ● 1800 K |
| | • 20 | ● 2000 K |
| | • 22 | ● 2200 K |
| | • 25 | ● 2500 K |
| | • 27 | ● 2700 K |
| | • 30 | ● 3000 K |
| | • 35 | ● 3500 K |
| | • 40 | ● 4000 K |
| | • 50 | ● 5000 K |
| Fastening options Opzioni di fissaggio | • TAM | Caps + Magnets Tappi + Magneti |
| | • TAC | Caps + Steel clips Tappi + Clip in acciaio |
| | • TCA | Caps + Adjustable brackets Tappi + Staffe orientabili |
| Screen Schermo | • 7025 | OVAL (70°×25°) |
| Finishing Finitura | • 01 | ● Grey anodized ● Anodica grigia |
| | • LC | Curved Louvers Louvers curvo |
| Accessories Accessori | • LS | Straight Louvers Louvers dritto |
| | • W | Wall cover Copertura murale |
| Order example Esempio ordine | • LLS 142 1829 18 TAM 7025 01 LC | |
| | | LLS, 142,0 mm • 5,60 ", 182 LED/m • 55 LED/ft, 9,5 W/m • 2,9 W/ft, Warm White 1800, Caps + Magnets, OVAL (70°×25°), Grey anodized, Curved Louvers |
| | | LLS, 142,0 mm, 182 LED/m, 9,5 W/m, Warm White 1800, Tappi + Magneti, OVAL (70°×25°), Anodica grigia, Louvers curvo |

CRI Typical* CRI Tipici*




R9050 – H6 • 3SDCM

High Efficacy

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

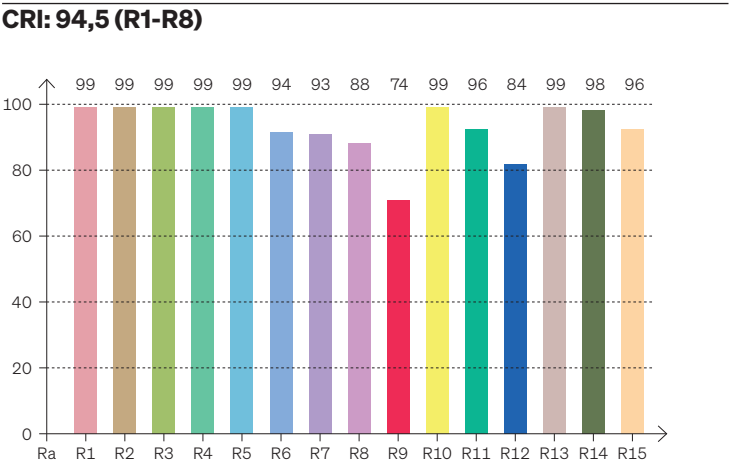

CRI Values Valori CRI

CCTK: ● 3000 K

| CRI | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 |
|------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| 94,4 | 99 | 99 | 99 | 99 | 99 | 94 | 93 | 88 | 74 | 99 | 96 | 84 | 99 | 98 | 96 |

Color Parameters Parametri del colore

| Color Temperature | Color Render Index | Red Component | Color Fidelity | Color Gamut | Color Quality Scale | Color Coord. CIE 1931 | Color Coord. CIE 1931 | Color Coordinate | Color Coordinate | Color Diviation from Black Body |
|-------------------|--------------------|---------------|----------------|-------------|---------------------|-----------------------|-----------------------|------------------|------------------|---------------------------------|
| CCT K | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | X | Y | U | V | ΔUV |
| 3042 K | 96,2 | 74,4 | 92,2 | 100,5 | 92,9 | 0,441 | 0,399 | 0,255 | 0,347 | -0,0009 |




FULL SPECTRUM • 3SDCM

OPTISOLIS™

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

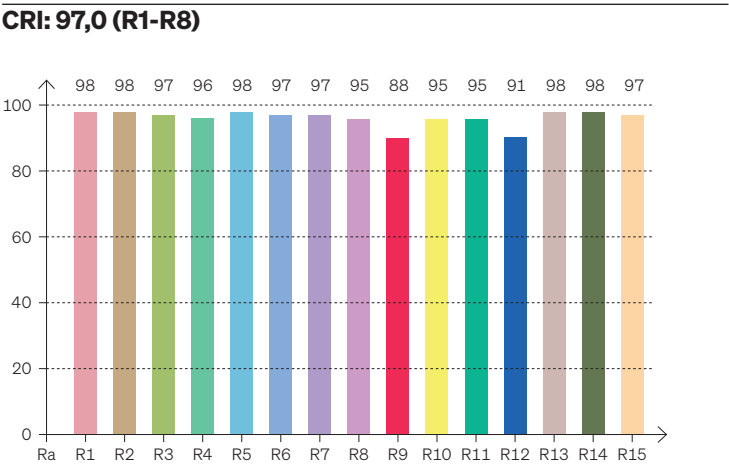

CRI Values Valori CRI

CCTK: ● 3000 K



| CRI | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 |
|------|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| 97,0 | 98 | 98 | 97 | 96 | 98 | 97 | 97 | 95 | 88 | 95 | 95 | 91 | 98 | 98 | 97 |

Color Parameters Parametri del colore

| Color Temperature | Color Render Index | Red Component | Color Fidelity | Color Gamut | Color Quality Scale | Color Coord. CIE 1931 | Color Coord. CIE 1931 | Color Coordinate | Color Coordinate | Color Diviation from Black Body |
|-------------------|--------------------|---------------|----------------|-------------|---------------------|-----------------------|-----------------------|------------------|------------------|---------------------------------|
| CCT K | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | X | Y | U | V | ΔUV |
| 3059 K | 97,0 | 88,0 | 94,8 | 102,8 | 94,5 | 0,432 | 0,400 | 0,249 | 0,346 | -0,0008 |

LLS • Oval

Cable outlet Uscita cavi

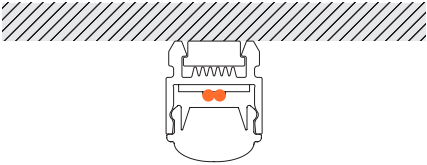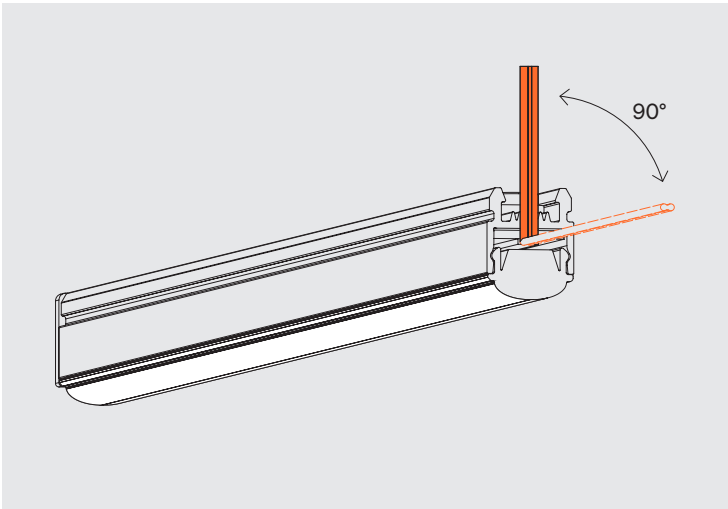

Scale/Scala 1:1

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product. Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore. Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.