


Play Box



Play Box

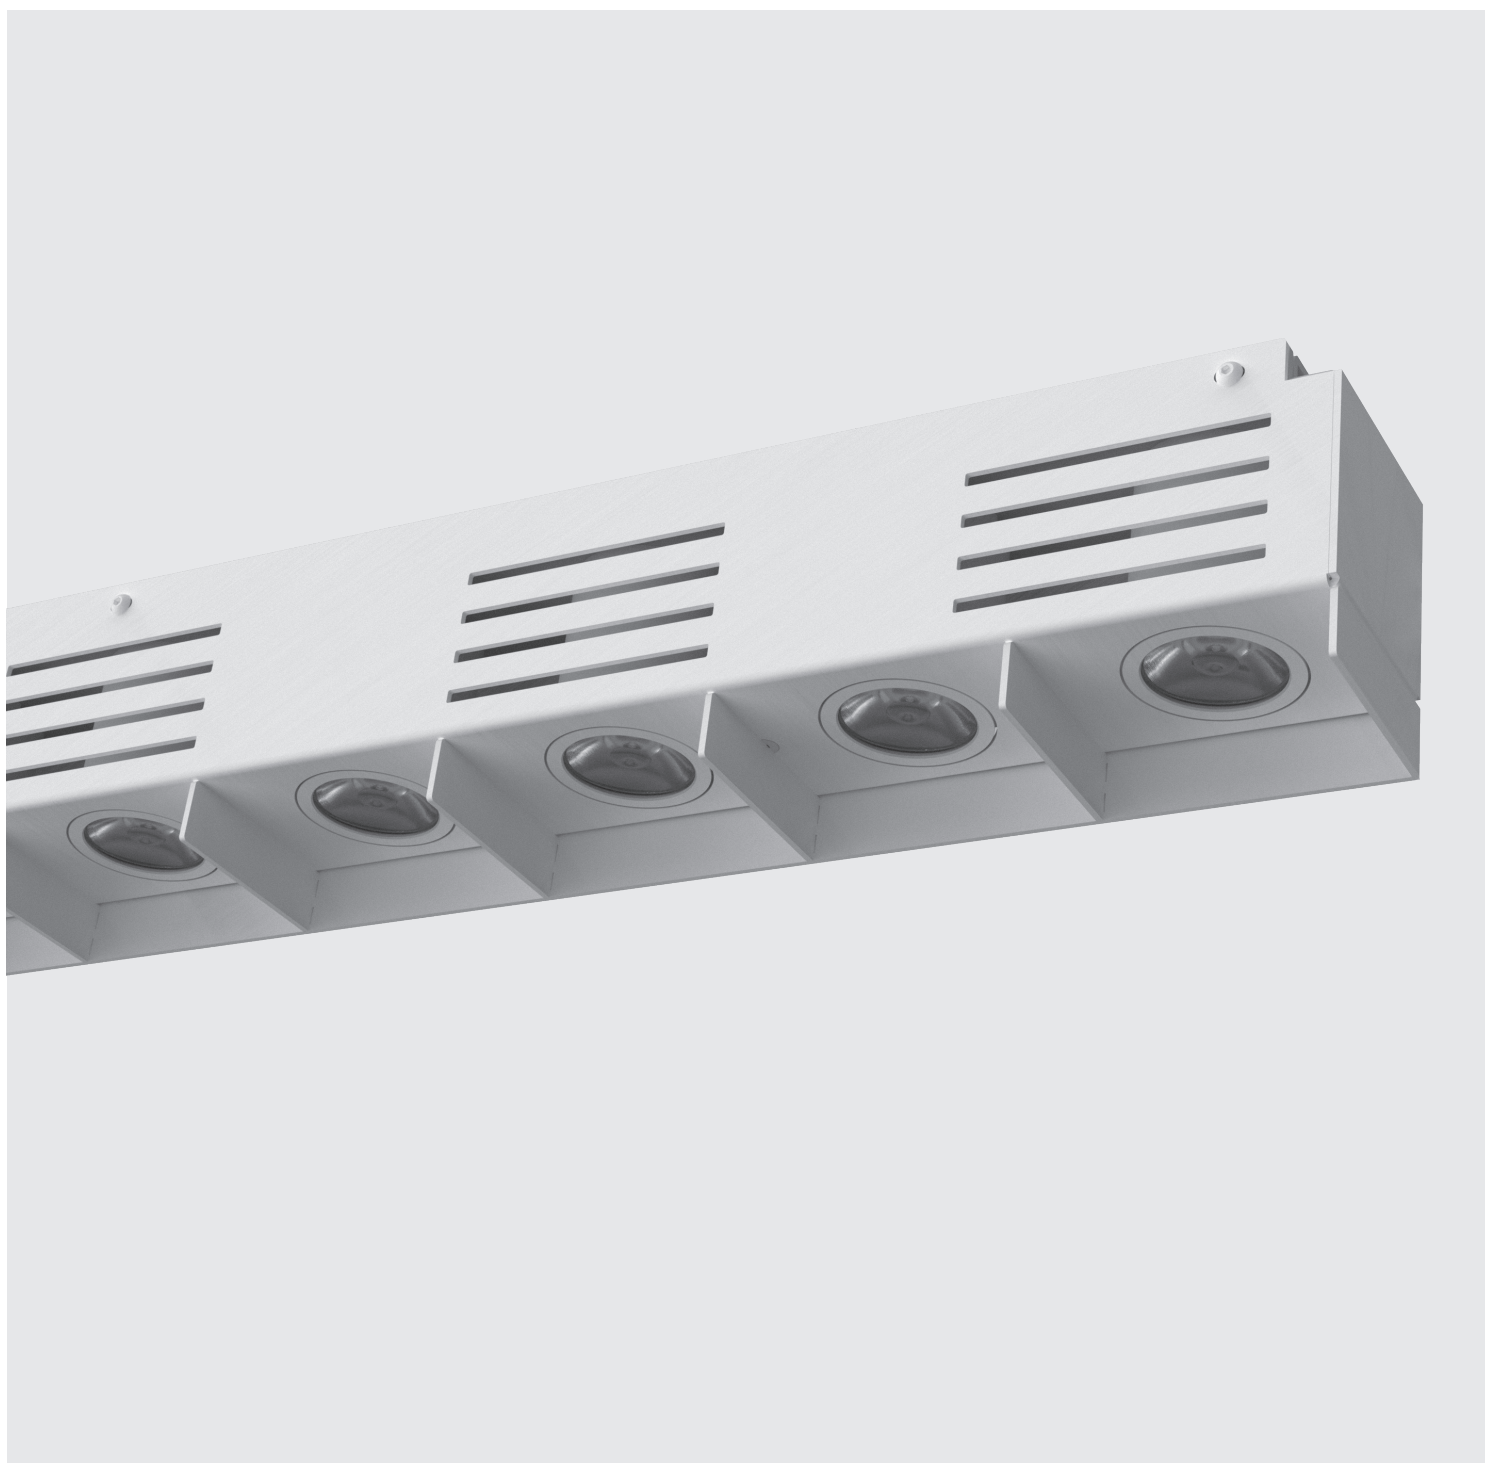

Spotted

Body Corpo

Aluminium spot

Spot in alluminio

Fastening Fissaggio	With magnets	Con magneti
Optics Ottica	14° • 20° • 32° • 52°	14° • 20° • 32° • 52°
Wiring set Cavo alimentazione	2000 mm • 78,74 "	2000 mm
Custom size Lunghezza ordinabile	201 mm • 7,91 " 402 mm • 15,82 " 603 mm • 23,74 " 804 mm • 31,65 " 1005 mm • 39,56 "	201 mm 402 mm 603 mm 804 mm 1005 mm
Finishing Finitura	○ White RAL9016 matt ○ RAL9016 bianca opaca	

Listings and marks

Certificazioni e marchi



Where we produce

Dove produciamo

Made in Italy

LED (See page CRI)

LED (Vedi pagina CRI)




Light Luce

Pitch Passo	↓ P7 67,0 mm • 2,64 "	
Light source Sorgente luminosa	3 LED/module • 3 LED/modulo 6 LED/module • 6 LED/modulo 9 LED/module • 9 LED/modulo 12 LED/module • 12 LED/modulo 15 LED/module • 15 LED/modulo	
Power consumption Consumo energia	3 LED: 18,6 W 6 LED: 37,2 W 9 LED: 55,8 W 12 LED: 74,4 W 15 LED: 93,0 W	(3 × 6,2 W/spot) (6 × 6,2 W/spot) (9 × 6,2 W/spot) (12 × 6,2 W/spot) (15 × 6,2 W/spot)
CCT K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	
On request/Su richiesta: ● ● Mixing/Miscelazione		
CRI R9 Rf @ 3000 K Rg @ 3000 K MacAdam ellipse	Min 90 Min 80 95 102 2	
Delivered lumen output Flusso luminoso emesso ● 3000 K	3 LED: 1590 lm 6 LED: 3180 lm 9 LED: 4770 lm 12 LED: 6360 lm 15 LED: 7950 lm	(3 × 530 lm) (6 × 530 lm) (9 × 530 lm) (12 × 530 lm) (15 × 530 lm)
Input current Corrente di ingresso	24 V DC	

Play Box


Dimensions Dimensioni

Scale/Scala 1:2

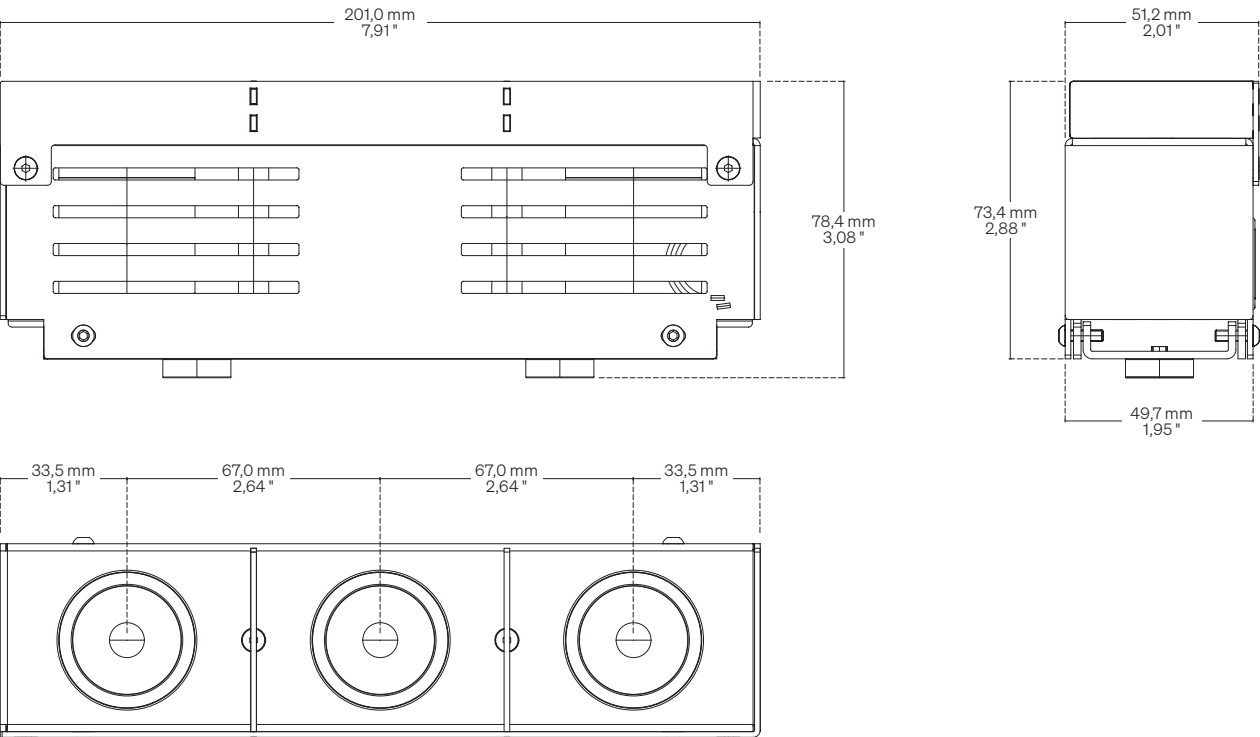


Fastening options Opzioni di fissaggio

M With magnets
Con magneti

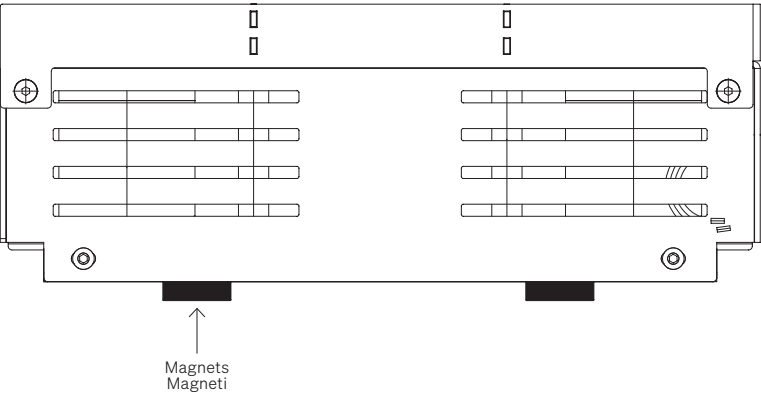

Play Box

Configurations Configurazioni

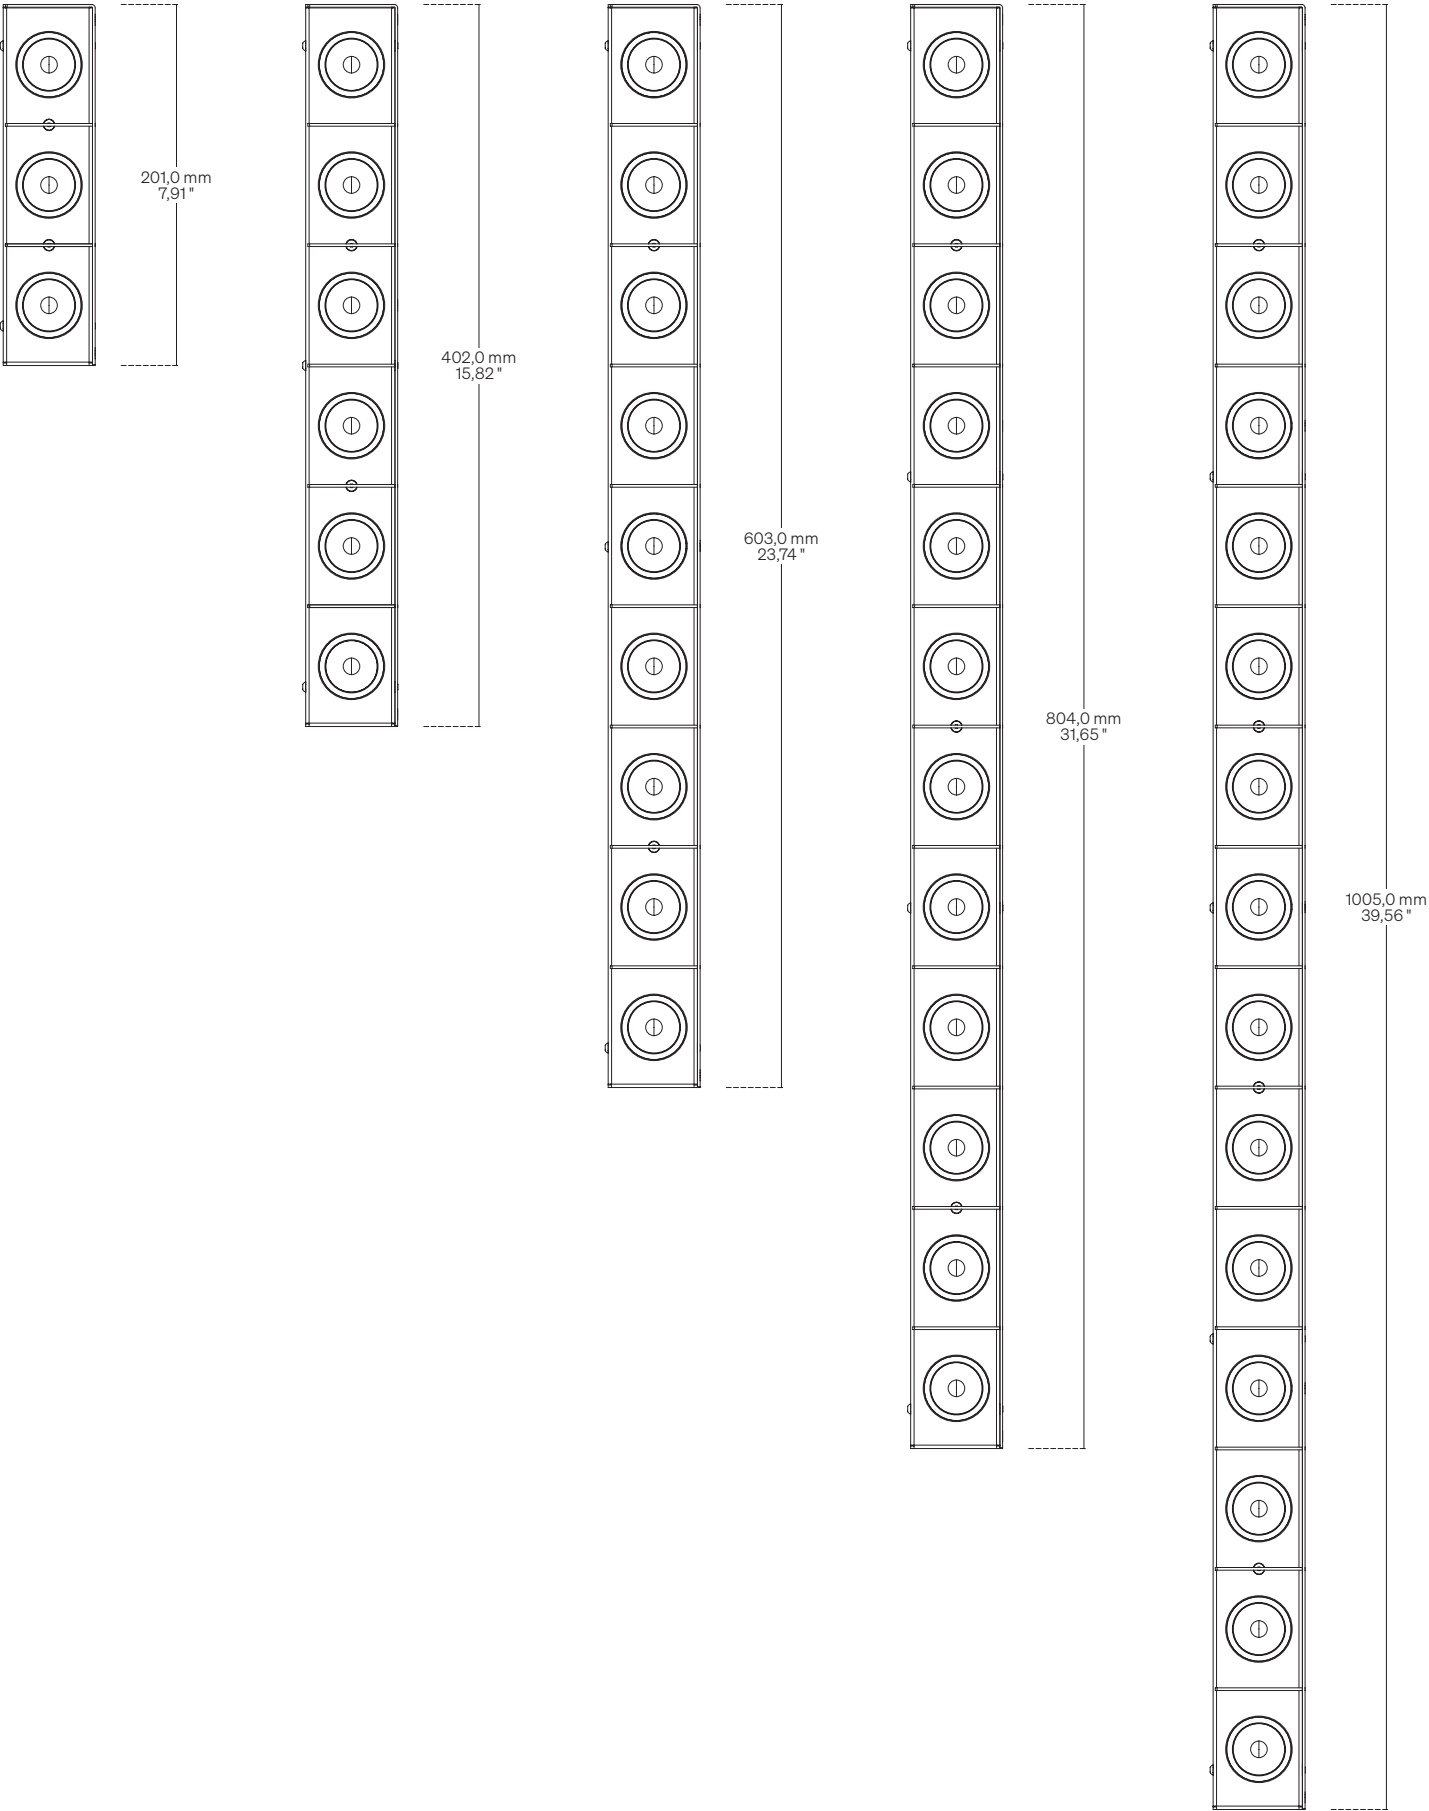

Play Box

Order code Codice ordine

Basic code Codice base

- **BP36** Play Box
3 × 6,2 W/spot
- **BP66** Play Box
6 × 6,2 W/spot
- **BP96** Play Box
9 × 6,2 W/spot
- **BP126** Play Box
12 × 6,2 W/spot
- **BP156** Play Box
15 × 6,2 W/spot

CCT K CCT K

- **27** ● 2700 K
- **30** ● 3000 K
- **35** ● 3500 K
- **40** ● 4000 K
- **50** ● 5000 K

Fastening options Opzioni di fissaggio

- **M** With Magnets
Con Magneti

Optics Ottica

- **14** 14°
- **20** 20°
- **32** 32°
- **52** 52°

Finishing Finitura

- **04** White RAL9016 matt
RAL9016 bianca opaca

Order example Esempio ordine

- **BP36 27 M 14 04**

Play Box 3 × 6,2 W/spot,
Warm White 2700, With Magnets,
14° Optic, White RAL9016 matt

Play Box 3 × 6,2 W/spot,
Warm White 2700, Con Magneti,
Ottica 14°, RAL9016 bianca opaca

CRI Typical* CRI Tipici*




R9080 • 2 SDCM

Power LED

● 3000 K

* Values taken from sample measurements
* Valori presi da misurazioni a campione

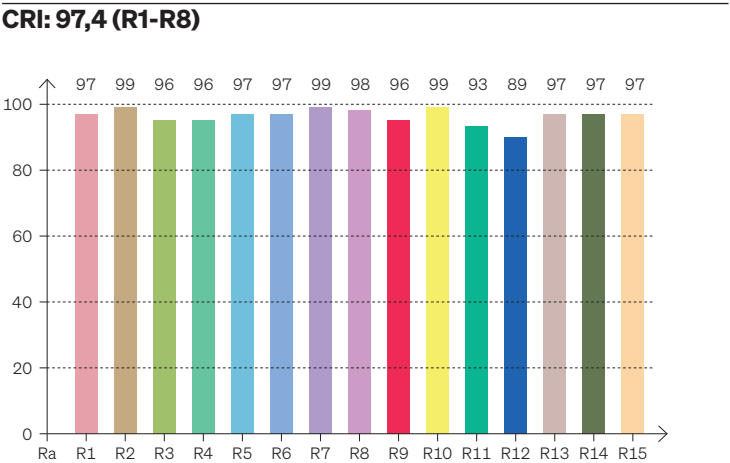

CRI Values Valori CRI

CCTK: ● 3000 K

CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,4	97	99	96	96	97	97	99	98	96	99	93	89	97	97	97

Color Parameters Parametri del colore

Color Temperature	Color Render Index	Red Component	Color Fidelity	Color Gamut	Color Quality Scale	Color Coord. CIE 1931	Color Coord. CIE 1931	Color Coordinate	Color Coordinate	Color Diviation from Black Body
CCT K	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	X	Y	U	V	ΔUV
3067 K	97,4	96,3	95,8	102,3	96,3	0,431	0,399	0,249	0,346	-0,0010

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.