


# Iris



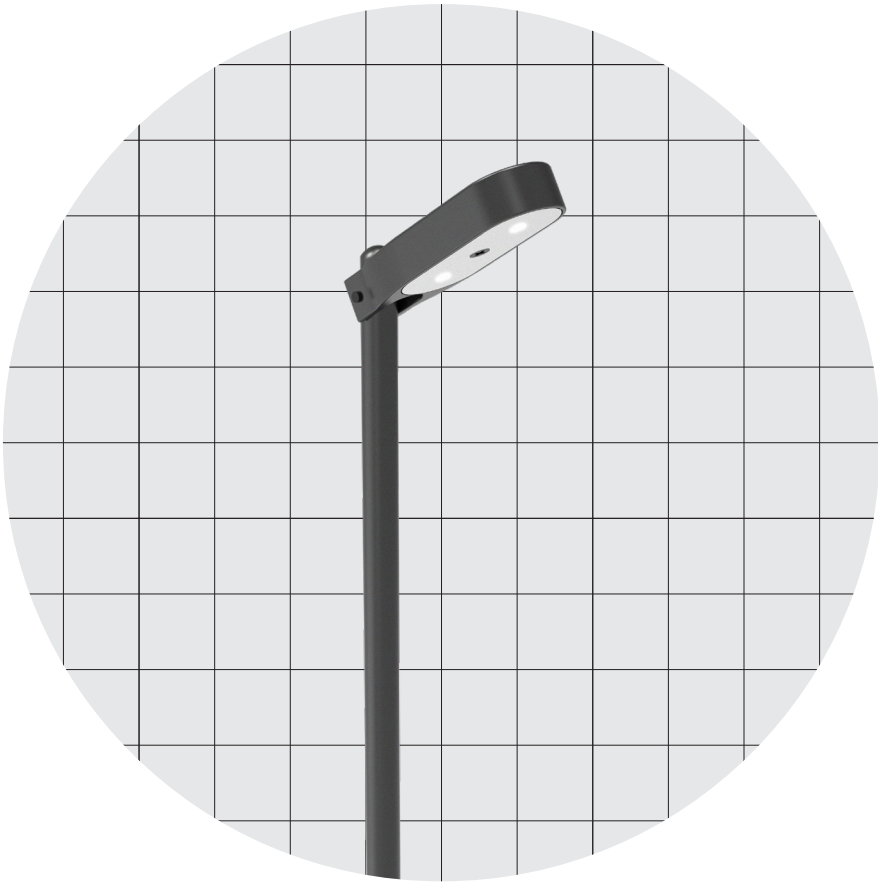

## Body Corpo

### Aadjustable aluminium spotlight with support

Spot in alluminio orientabile con sostegno

<b>Fastening</b> Fissaggio	With threaded base	Con base filettata
<b>Optics</b> Optica	120°	120°
<b>Wiring set</b> Cavo alimentazione	1500 mm • 59,06 "	1500 mm
<b>Finishing</b> Finitura	● Chrome galvanized	● Galvanica cromo

**Listings and marks**  
Certificazioni e marchi



**Where we produce**  
Dove produciamo

Made in Italy

**LED**  
LED




## Light Luce

<b>Light source</b> Sorgente luminosa	↓ <b>Series/In serie</b> V CC: 2,0 W @ 350mA	↓ <b>Parallel/In parallelo</b> 2,1 W @ 24 V DC
<b>CCT K</b>	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K	● 2700 K ● 3000 K ● 3500 K ● 4000 K ● 5000 K
Mixing on demand Miscelazione su richiesta		
<b>CRI</b> <b>R9</b> <b>Rf @ 3000 K</b> <b>Rg @ 3000 K</b> <b>MacAdam ellipse</b>	Min 90 Min 80 96 103 2	Min 90 Min 50 92 100 3
<b>Luminous flux</b> Flusso luminoso ● 3000 K	202 lm @ 350mA	350 lm
<b>Input voltage/current</b> Tensione/Corrente di ingresso	350 mA	24 V DC
<b>Only external driver</b> Driver solo esterno	-	DC/CC

## Dimensions Dimensioni

Scale/Scala 1:2

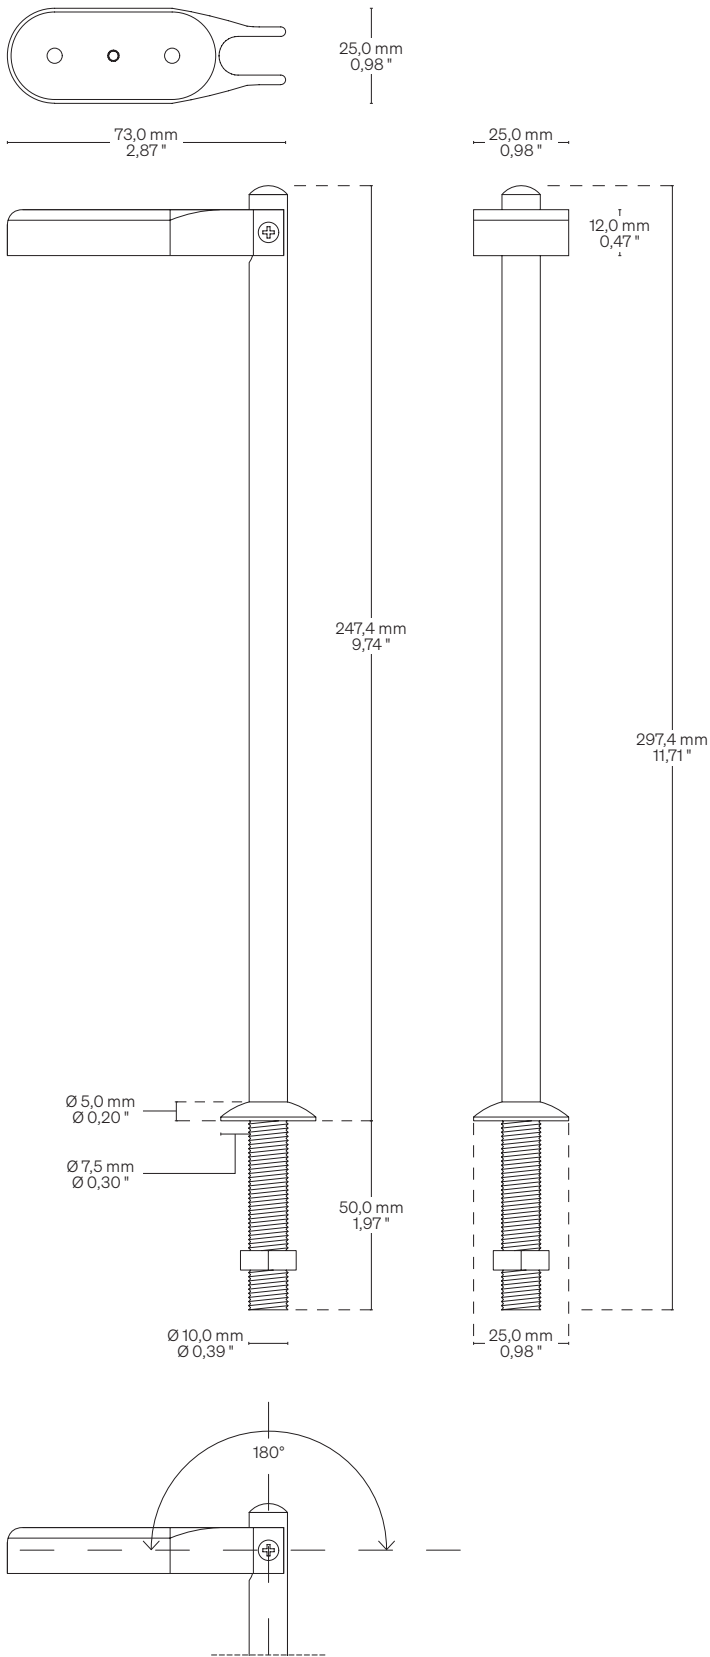

## Fastening options Opzioni di fissaggio



Hole size:  $\varnothing 10,5 \text{ mm} \cdot \varnothing 0,41 \text{ ''}$   
 Dimensione foro:  $\varnothing 10,5 \text{ mm}$

## Order code Codice ordine

<b>Basic code</b> Codice base	<b>IS</b>	Iris
<b>CCT K</b> CCT K	<b>WW27</b> <b>WW30</b> <b>NW35</b> <b>NW</b> <b>CW</b>	<ul style="list-style-type: none"> <li><span style="color: orange;">●</span> 2700 K</li> <li><span style="color: orange;">●</span> 3000 K</li> <li><span style="color: yellow;">●</span> 3500 K</li> <li><span style="color: yellow;">●</span> 4000 K</li> <li><span style="color: lightblue;">●</span> 5000 K</li> </ul>
<b>Accessories</b> Accessori	<b>DRPWM</b>  <b>DRDC</b>	<ul style="list-style-type: none"> <li>Converter 24 V DC/ Convertitore 24 V DC</li> <li>Converter 24 V DC Potential different dimmer/ Convertitore 24 V DC Dimmerabile in tensione</li> </ul>
<b>Order example</b> Esempio ordine	<b>IS WW27 DRPWM</b>	<ul style="list-style-type: none"> <li>Iris, Warm White 2700, Converter 24 V DC</li> <li>Iris, Warm White 2700, Convertitore 24 V DC</li> </ul>

# Warnings Avvertenze

---

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

---

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.