

Light efficiency:

114 Lumen/Watt


Light quality:

CRI: 94,8

Color temperature:

3015 K

Output: 912 Lumen (L 500mm)

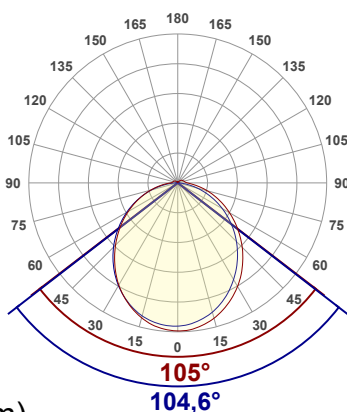

Product name:

133MINI-182-3000K-20Wm-
OP30-500mm

Date and time:

04/03/2024 16:26:48


Power consumption:

| Power | Power factor |
|-----------------|--------------|
| 8,0 W | 1,0 |
| Voltage (Vcc) | Current |
| 24,0 V | 0,333 A |


TM-30 details

Rf 90,7
Fidelity
index Rf


Rg 98,2
Gamut
index Rg

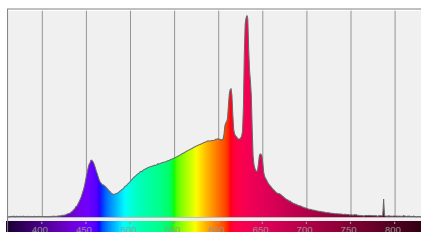

Spectral distribution

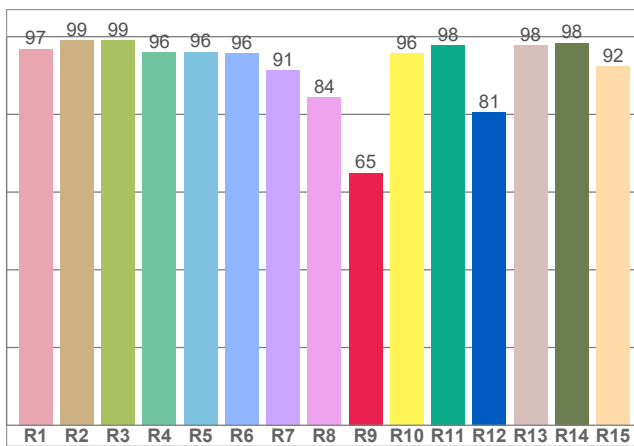


CRI R values

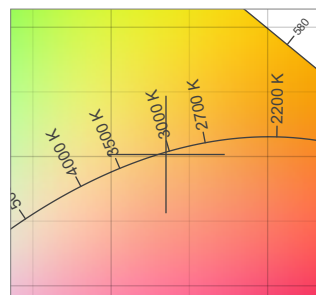

White color point

| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3015 K | 94,8 | 64,9 | 90,7 | 98,2 | 91,9 | 0,435 | 0,402 | 0,250 | 0,347 | -0,0008 |

Beam details

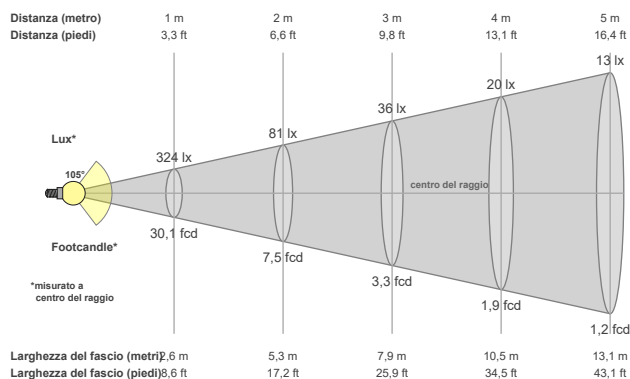

Beam angels

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 105,5° | 164,6° | 210,5° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 332 cd | 74,9% | 51,8% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3,3ft | 6,6ft | 9,8ft | 13,1ft | 16,4ft | 19,7ft | 23ft | 26,2ft | 29,5ft | 32,8ft | 36,1ft | 39,4ft | 42,7ft | 45,9ft | 49,2ft | 52,5ft | 55,8ft | 59,1ft | 62,3ft | 65,6ft |
| 324lx | 81lx | 36lx | 20lx | 13lx | 9lx | 7lx | 5lx | 4lx | 3lx | 3lx | 2lx | 2lx | 2lx | 1lx | 1lx | 1lx | 1lx | 1lx | 1lx |
| 30,1fcd | 7,5fcd | 3,3fcd | 1,9fcd | 1,2fcd | 0,8fcd | 0,6fcd | 0,5fcd | 0,4fcd | 0,3fcd | 0,2fcd | 0,2fcd | 0,2fcd | 0,2fcd | 0,1fcd | 0,1fcd | 0,1fcd | 0,1fcd | 0,1fcd | 0,1fcd |