


TOOL-N Top Bend

280 LED/m • 85 LED/ft
6,0 W/m • 1,8 W/ft
280 LED/m • 85 LED/ft
12,0 W/m • 3,7 W/ft

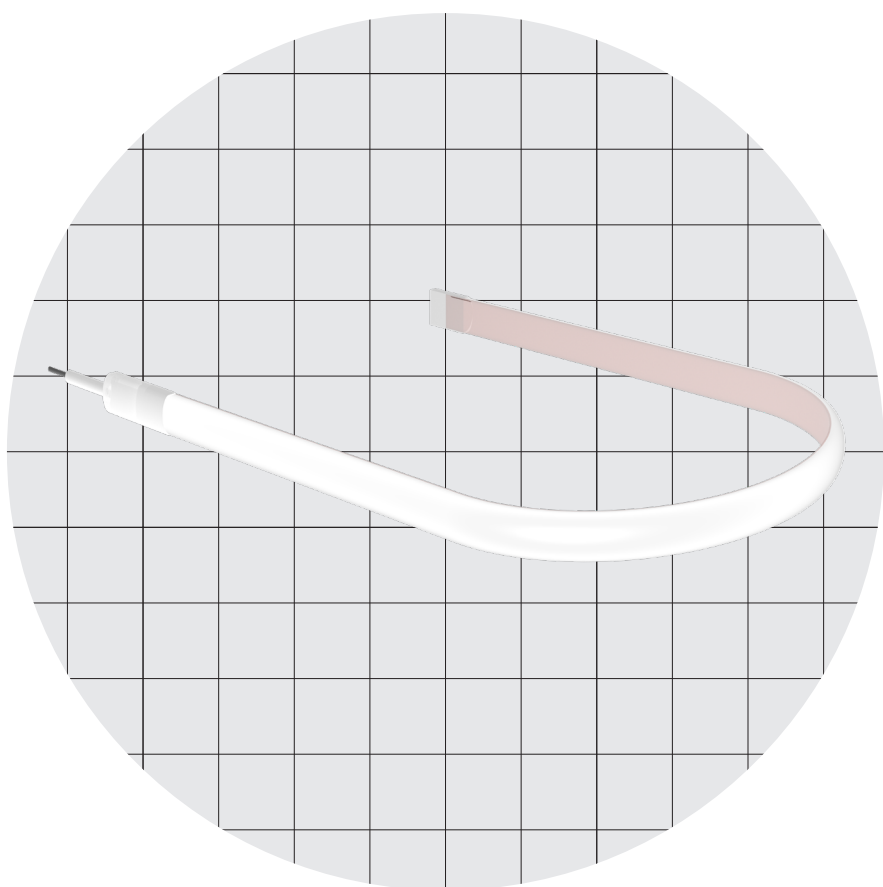

6,0 W/m
1,8 W/ft
5,5 × 4,5 mm
0,22 × 0,18 "

12,0 W/m
3,7 W/ft
7,5 × 4,7 mm
0,29 × 0,19 "

TOOL-N Top Bend



Body Corpo

Flexible Strip LED Top Bend

Strip LED flessibile Top Bend

Fastening

Fissaggio

Double-sided tape

Nastro biadesivo

Max length (10% voltage drop): 5000 mm • 197,0 "

Lunghezza massima (Perdita di tensione del 10%): 5000 mm


Listings and marks

Certificazioni e marchi



Warnings

Avvertenze



Light Luce

Light source

Sorgente luminosa

280 LED/m • 85 LED/ft

280 LED/m • 85 LED/ft

Power consumption

Consumo energia

6,0 W/m • 1,8 W/ft

12,0 W/m • 3,7 W/ft

CCT K

● 3000 K

● 4000 K

● 3000 K

● 4000 K

CRI

Min 90

Min 90

Delivered lumen output

Flusso luminoso emesso

● 3000 K

90 lm/W

540 lm/m • 165 lm/ft

85 lm/W

1020 lm/m • 311 lm/ft

Input voltage

Tensione di ingresso

24 V DC

24 V DC

TOOL-N Top Bend






Dimensions Dimensioni

Scale/Scala 1:1

Curvature radius Raggio di curvatura

6,0 W/m • 1,8 W/ft



12,0 W/m • 3,7 W/ft

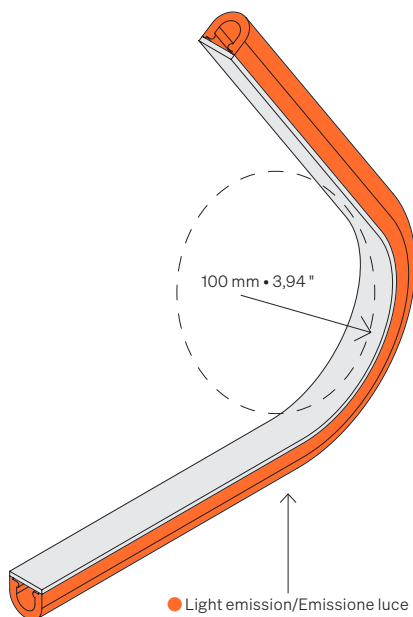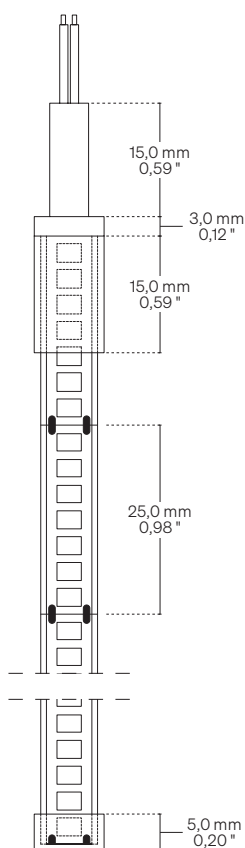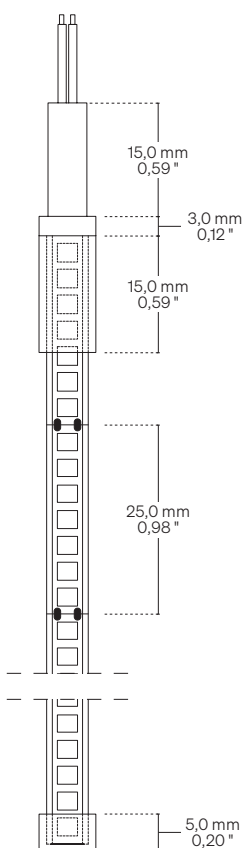

Direction of bending Senso di curvatura

OK Orange zone → Light emission
Zona arancio → Emissione luce

NO Orange zone → Light emission
Zona arancio → Emissione luce

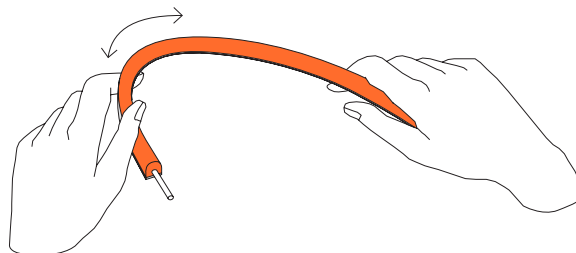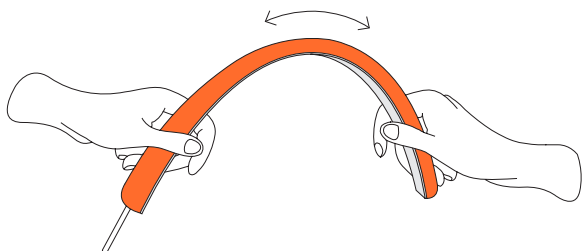

TOOL-N Top Bend

Code for customised order Codice per ordine su misura



Basic code Codice base

• **TONTBF2806** TOOL-N Top Bend
280 LED/m • 85 LED/ft
6,0 W/m • 1,8 W/ft
IP65

• **TONTBF28012** TOOL-N Top Bend
280 LED/m • 85 LED/ft
12,0 W/m • 3,7 W/ft
IP65

CCT K CCT K

• **WW30** ● 3000 K
NW ● 4000 K

Order length Lunghezza ordinabile

• -- Specify the size
Specificare la misura

Order example Esempio ordine

• **TONTBF2806 WW30 • 0,32**

TOOL-N Top Bend, 280 LED/m • 85 LED/ft,
6,0 W/m • 1,8 W/ft, Warm White 3000 •
0,32 m

TOOL-N Top Bend, 280 LED/m, 6,0 W/m,
Warm White 3000 • 0,32 m

Code for coil Codice ordine per bobina



Basic code Codice base

• **RTONTBF2806** TOOL-N Top Bend
Coil/Bobina 5 m • 16,40 ft
280 LED/m • 85 LED/ft
6,0 W/m • 1,8 W/ft
IP65

• **RTONTBF28012** TOOL-N Top Bend
Coil/Bobina 5 m • 16,40 ft
280 LED/m • 85 LED/ft
12,0 W/m • 3,7 W/ft
IP65

CCT K CCT K

• **WW30** ● 3000 K
NW ● 4000 K

Order example Esempio ordine

• **RTONTBF2806 WW30**

TOOL-N Top Bend Coil 5 m • 16,40 ft reel,
280 LED/m • 85 LED/ft, 6,0 W/m • 1,8 W/ft,
Warm White 3000

TOOL-N Top Bend Bobina 5 m, 280 LED/m,
6,0 W/m, Warm White 3000

Warnings Avvertenze

The installation of the product, must be done as illustrated in the catalogue or inside the technical data-sheet that can be asked to the manufacturer. An installation performed differently from the one indicated may compromise the durability and characteristics of the product itself.

An installation performed differently from the one indicated may compromise the durability and characteristics of the product.

Unsuitable cross-section / length of the cable can negatively affect the lighting power of the product. If Power supplies, even those with a plastic case, are located in spaces that are too small for their dimensions; they will be subjected to dissipation problems that will compromise their functionality. Silicones or resins subjected to temperature changes and used near the product, if not in accordance with the specifications issued by the manufacturer, they can seriously damage the LED component. The products can not be modified without any authorization by the manufacturer.

L'installazione del prodotto, dovrà eseguirsi come illustrato nel catalogo o nella documentazione tecnica richiedibile al produttore. Un'installazione eseguita diversamente da quella indicata, può compromettere la durata e le caratteristiche del prodotto.

Prima dell'installazione verificare la corretta sezione del cavo collegato tra LED e alimentatore.

Sezione / lunghezza del cavo non congrui, possono alterare in negativo la luminosità del prodotto. Gli alimentatori, anche quelli con contenitore plastico, inseriti in spazi troppo piccoli, saranno soggetti a problemi di dissipazione che comprometteranno la loro funzionalità. Siliconi o resine soggetti a sbalzi di temperature e utilizzati in prossimità del prodotto, se non conformi alle specifiche rilasciate dal produttore possono danneggiare gravemente il componente LED. I prodotti non possono essere modificati senza autorizzazione da parte del produttore.