

Light efficiency:

44 Lumen/Watt


Light quality:

CRI: 97.6

Color temperature:

2852 K

Output: 1046 Lumen

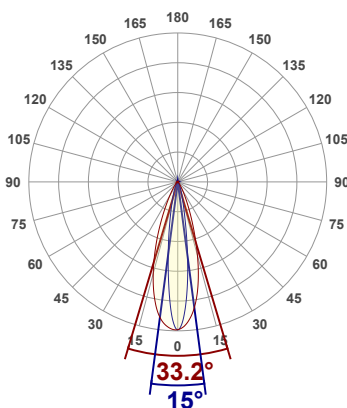

Product name:

**TOOL CHAIN WALLWASHER-
3000K-48Wm-500mm-O30**

Date and time:


17/06/2026 15:05:49

Power consumption:


Power	Power factor
23.8 W	1.0
Voltage (Vcc)	Current
24.0 V	0.993 A

TM-30 details


Rf 96.7 Fidelity index Rf	Rg 102.6 Gamut index Rg
--	--------------------------------------

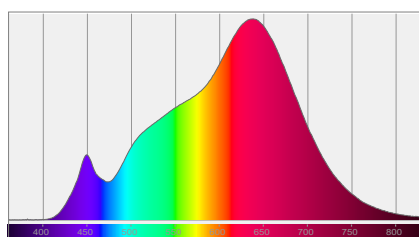

Spectral distribution

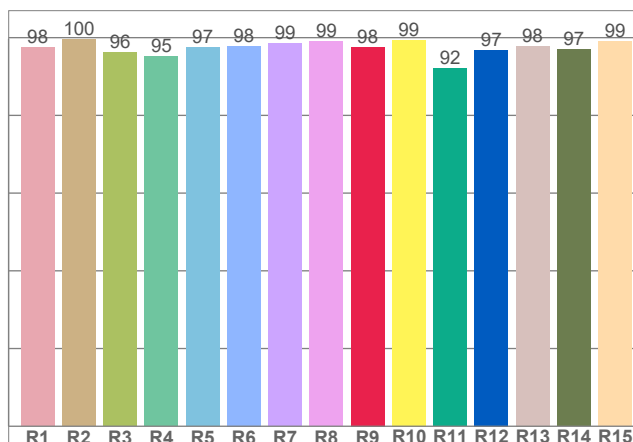


CRI R values

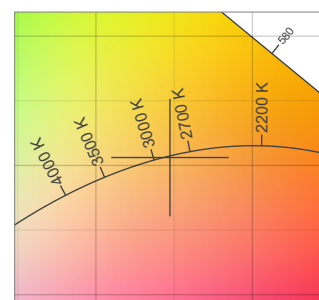

White color point

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2852 K	97.6	97.6	96.7	102.6	95.8	0.447	0.406	0.256	0.349	-0.0005

Beam details

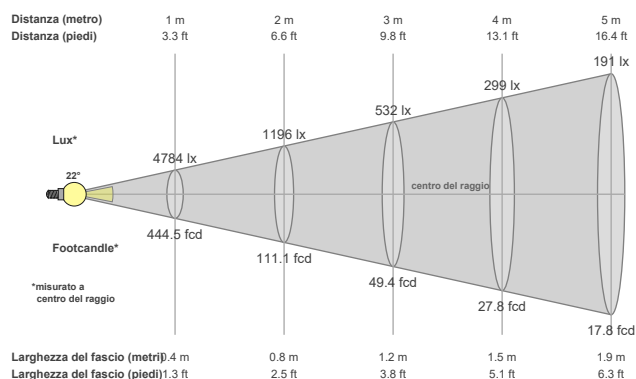

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
21.8°	44°	65.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
4800 cd	98.5%	95.6%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4784lx	1196lx	532lx	299lx	191lx	133lx	98lx	75lx	59lx	48lx	40lx	33lx	28lx	24lx	21lx	19lx	17lx	15lx	13lx	12lx
444.5fcd	111.1fcd	49.4fcd	27.8fcd	17.8fcd	12.3fcd	9.1fcd	6.9fcd	5.5fcd	4.4fcd	3.7fcd	3.1fcd	2.6fcd	2.3fcd	2fcd	1.7fcd	1.5fcd	1.4fcd	1.2fcd	1.1fcd